

LK1101/LK1102/LK1103/LK1104
Free Standing Tub Installation Instruction

Important Notice for Faucet

1. Please read carefully and follow instruction when operating to avoid unnecessary damage.
2. Please check if the product is in well condition. Installation tools are not equipped with products, please prepare for them yourself.
3. Relative information of this instruction is in printing, please refer to it. For product character, packing and supply situation, EAGO has right to change the information of the instruction temporarily without prior notice.
4. Please don't use this product after alcohol or drugs.
5. The children should be closely supervised by parents to use product.
6. Don't use strong causticity chemical liquid to clean product, such as sulphuric acid, hydrochloric acid, lye and etc.
7. Warning: the water temperature shall never exceed 60°C when using this product.
8. Please refer to safety information, installation pictures and steps, please keep it carefully.

Instruction

The product adopts standard accessories, please follow product specifications to install product: Confirm installation place of product → connect drainage pipes → connect pipes → check and clean → test with water.


1. Confirm the installation place of product
Please refer product specifications to arrange sewage pipes, power socket and water inlet pipe, then check if there is enough space to connect every part.
2. Connect drainage pipes
Drainage pipe is in the bottom of tub, the diameter of water drainage outlet is 38mm, and pipe could be bended and stretched; inserting drainage pipe elbow of tub into customer's drainage system pipe with adhesive tape or glass cement during connection. In case of influencing draining water, pipe could not be folded or squashed.
3. Connect pipes
Water inlet pipe is high pressure resistant reticulated pipe, please follow direction in junctions to connect cold and hot water joints, which can not be connected contrarily. For continuous use and maintain in future, please install a valve in cold and hot water supply pipes individually.

Maintenance Instructions


1. Clean the acrylic surface :
Clean acrylic surface with cotton flannel or sponge and water in daily life. If there is scratch on the surface, please use No. 1500 water abrasive cloth polishing slightly to clear away scratches, and then polish with toothpaste, cotton flannel. Please don't use strong caustic chemical liquid, such as sulphuric acid, hydrochloric acid, lye during maintenance.
2. Plated item maintenance:
Clean the surface of plated item with cotton flannel, please don't use coarse cloth.

4. After above steps, please check that if each joint is sealed well, and then clean up sundries of tub. Open drainer to clean tub.
5. Test with water
Please confirm the tub is cleaned up, and then close drainer to store water. Check if there is leakage during water test.

Faucet Instruction

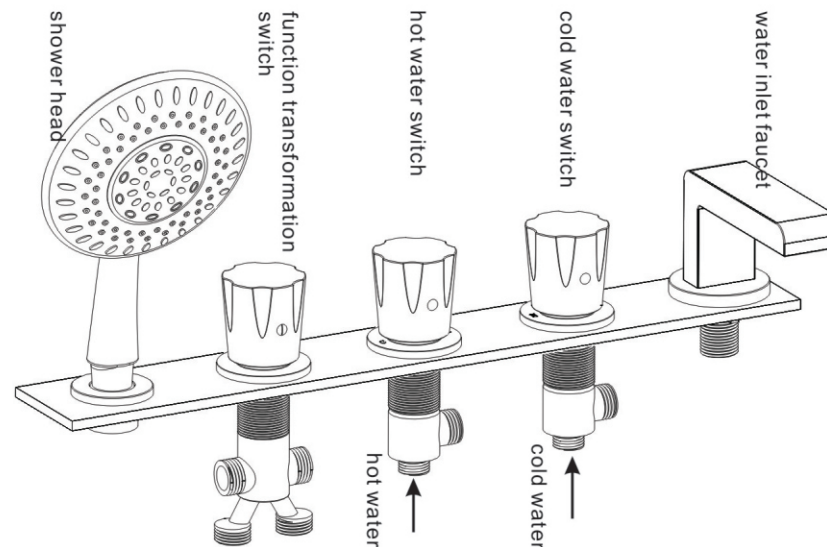

Tub Faucet Switch Instruction

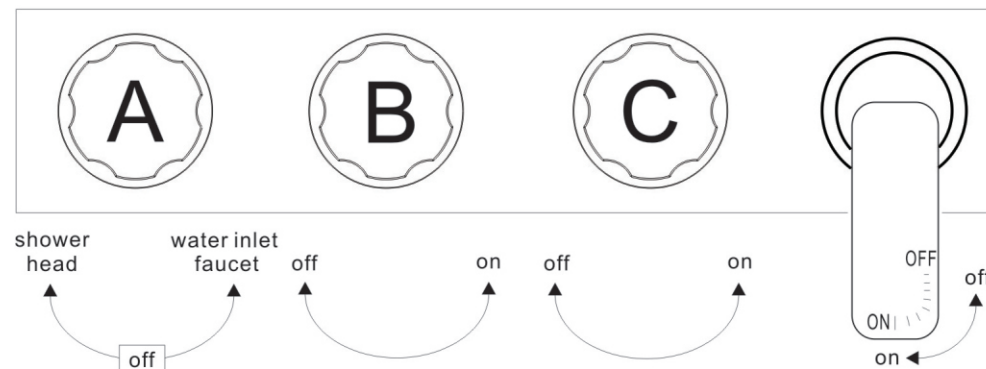

Instruction

3 Pieces of Tub Faucet Instruction: Installation ways: Left is cold water, right is hot water.

- A. The valve is for adjusting water. Turn left 90° is shower head function, turn right 90° is faucet function.
- B. Red symbol in water inlet pipe is for hot water, H symbol under faucet handle between left and right, turn anticlockwise to adjust water temperature, turn right to add cold water and water become cold, turn clockwise to close. Rotation angles are 90°.
- C. Blue symbol in water inlet pipe is for cold water, C symbols are under faucet handle between left and right, turn anticlockwise to adjust water temperature, turn right to add hot water and water become hot, turn clockwise to close. Rotation angles are 90°.
- D. Turn water outlet anticlockwise 90° to close the water function. Water outlet must face to tub in right ahead, and water outlet only can be turned as direction picture.