


FireProof™ Lighting
Fire Division

1 & 2-Hour Fire Rated Housings & Products



EL **ELCO** Lighting
The Best Choice in Lighting

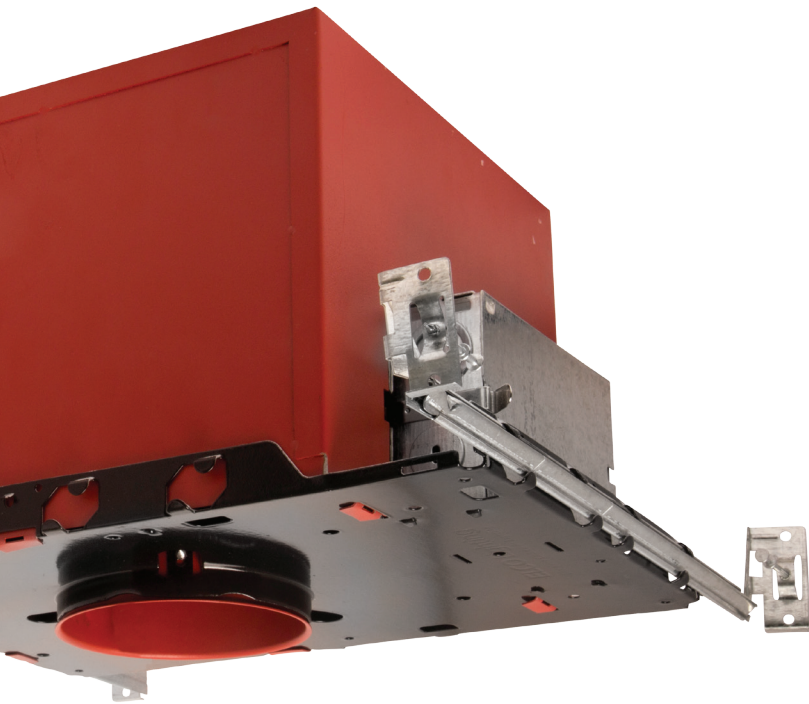

Introducing FireProof™ Lighting


Our new fire-rated housings are built with non-combustible materials that guarantee safe lighting for both commercial and residential ceilings. In the event of a fire the recessed fixture can withstand flames, heat, and gasses for a minimum of two hours, thus eliminating leakage into duct work. Easy to install. Maintenance free. This self-contained housing is not only available in several sizes and trims to complement any design, it also provides excellent sound reduction between floors.

FireProof™ Lighting


2-Hour Fire Rated housings




SIZES

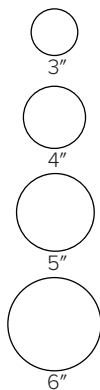


AVAILABLE HOUSINGS

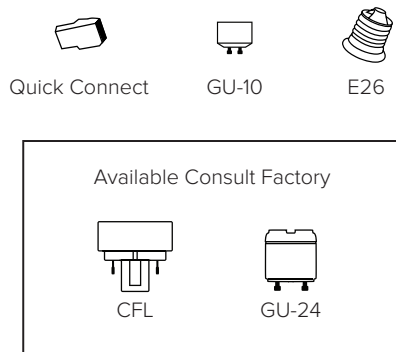

FEATURES

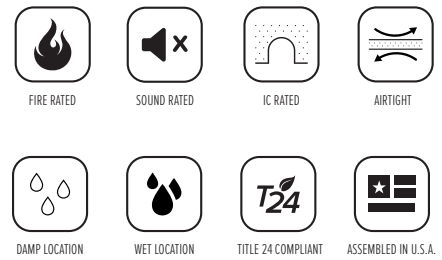

Dedicated LED 2-Hour Fire Rated ICA Housing

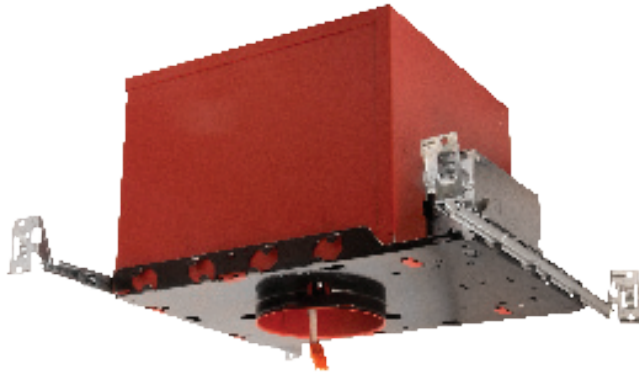

EL39FICA



EL39FICA-7 (277V)

(Includes Step Down Transformer 277V to 120V)

3" New Construction Housing

- UL Classified to maintain fire ratings up to two hours
- For use in insulated ceilings
- For use in 2 X 8 Construction
- Integrated non-combustable insulation enhances acoustical protection, dampening sound transfer between floors
- Adjustable housing accommodates up to 1-1/2" ceiling thickness
- Housing meets restricted air flow requirements (per ASTM E-283)
- 2-wire quick connect terminal connector
- UL Classified 2 Hour Fire Rating
- UL listed for Damp Locations
- UL listed for Wet Locations (with specified trims)
- UL listed for through branch circuit wiring
- UL listed for direct contact with insulation

Input Voltage	120V
Wattage	14W MAX

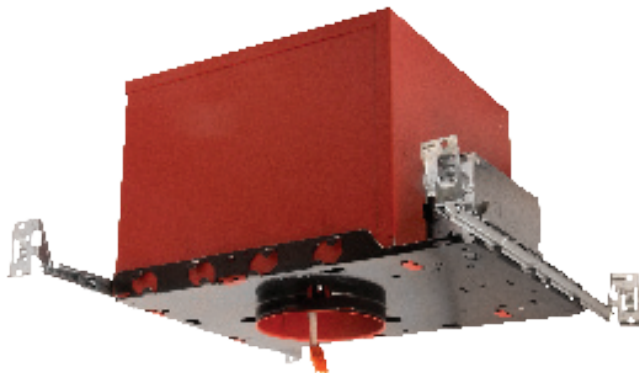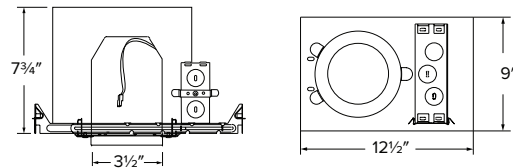

EL49FICA


EL49FICA-7 (277V)

(Includes Step Down Transformer 277V to 120V)


4" New Construction Housing

- UL Classified to maintain fire ratings up to two hours
- For use in insulated ceilings
- For use in 2 X 8 Construction
- Integrated non-combustable insulation enhances acoustical protection, dampening sound transfer between floors
- Adjustable housing accommodates up to 1-1/2" ceiling thickness
- Housing meets restricted air flow requirements (per ASTM E-283)
- 2-wire quick connect terminal connector
- UL Classified 2 Hour Fire Rating
- UL listed for Damp Locations
- UL listed for Wet Locations (with specified trims)
- UL listed for through branch circuit wiring
- UL listed for direct contact with insulation

Input Voltage	120V
Wattage	14W MAX

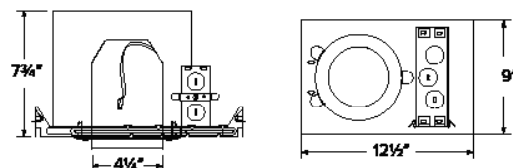

Dedicated LED 2-Hour Fire Rated ICA Housing

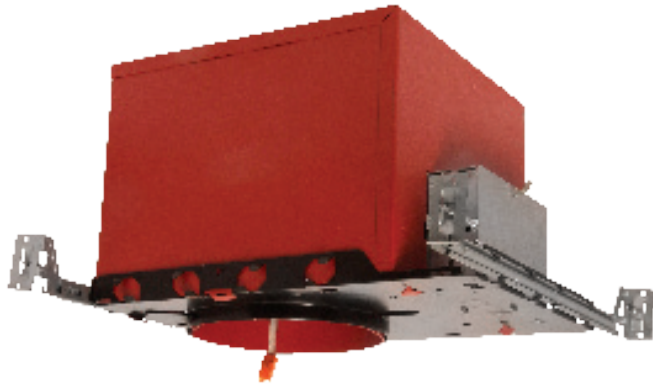


EL56FICA

EL56FICA-7 (277V)
(Includes Step Down Transformer 277V to 120V)

5" New Construction Housing

- UL Classified to maintain fire ratings up to two hours
- For use in insulated ceilings
- For use in 2 X 8 Construction
- Integrated non-combustable insulation enhances acoustical protection, dampening sound transfer between floors
- Adjustable housing accommodates up to 1-1/2" ceiling thickness
- Housing meets restricted air flow requirements (per ASTM E-283)
- 2-wire quick connect terminal connector
- UL Classified 2 Hour Fire Rating
- UL listed for Damp Locations
- UL listed for Wet Locations (with specified trims)
- UL listed for through branch circuit wiring
- UL listed for direct contact with insulation

Input Voltage	120V
Wattage	22W MAX

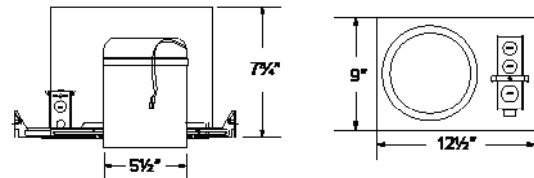


EL76FICA

EL76FICA-7 (277V)
(Includes Step Down Transformer 277V to 120V)

6" New Construction Housing

- UL Classified to maintain fire ratings up to two hours
- For use in insulated ceilings
- For use in 2 X 8 Construction
- Integrated non-combustable insulation enhances acoustical protection, dampening sound transfer between floors
- Adjustable housing accommodates up to 1-1/2" ceiling thickness
- Housing meets restricted air flow requirements (per ASTM E-283)
- 2-wire quick connect terminal connector
- UL Classified 2 Hour Fire Rating
- UL listed for Damp Locations
- UL listed for Wet Locations (with specified trims)
- UL listed for through branch circuit wiring
- UL listed for direct contact with insulation

Input Voltage	120V
Wattage	22W MAX

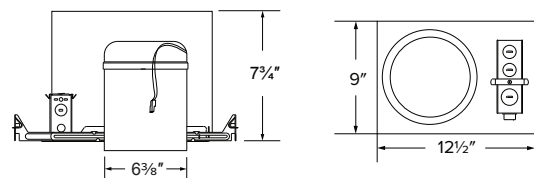

LED Inserts

3" LED Inserts



JA8 COMPLIANT



TITLE 24 COMPLIANT



DIMMABLE



90+ CRI



INTEGRATED LED



Round Baffle Trim

EL31127W 9W / 540 lm / 2700K
 EL31127BZ 9W / 540 lm / 2700K
 EL31130W 9W / 660 lm / 3000K
 EL31130BZ 9W / 580 lm / 3000K



Round Reflector Trim

White
 EL31227W 9W / 540 lm / 2700K
 EL31230W 9W / 660 lm / 3000K
 Bronze
 EL31227BZ 9W / 540 lm / 2700K
 EL31230BZ 9W / 660 lm / 3000K



Square Baffle Trim

EL33130W (White) 9W / 580 lm / 3000K
 EL33130BZ (Bronze) 9W / 630 lm / 3000K

Square Reflector Trim

EL33230W (White) 9W / 580 lm / 3000K
 EL33230BZ (Bronze) 9W / 630 lm / 3000K



3" Gimbal

EL31330W 9W / 640 lm / 3000K



Round Pull Down Adjustable

EL39727W (White) 10W / 840 lm / 2700K
 EL39730W (White) 10W / 840 lm / 3000K
 EL39727B (Black) 10W / 840 lm / 2700K
 EL39730B (Black) 10W / 840 lm / 3000K
 EL39727BZ (Bronze) 10W / 840 lm / 2700K
 EL39730BZ (Bronze) 10W / 840 lm / 3000K
 EL39727N (Nickel) 10W / 840 lm / 2700K
 EL39730N (Nickel) 10W / 840 lm / 3000K

4" LED Inserts



Baffle Trim

EL41027W 10W / 725 lm / 2700K
 EL41030W 10W / 750 lm / 3000K
 EL41035W 10W / 775 lm / 3500K
 EL41040W 10W / 800 lm / 4000K
 EL41050W 10W / 825 lm / 5000K
 EL41230W 12W / 750 lm / 3000K



Reflector Trim

White
 EL41527W 10W / 725 lm / 2700K
 EL41530W 10W / 750 lm / 3000K
 EL41535W 10W / 775 lm / 3500K
 EL41540W 10W / 800 lm / 4000K
 EL41550W 10W / 825 lm / 5000K
 Bronze
 EL41527BZ 10W / 725 lm / 2700K
 EL41530BZ 10W / 750 lm / 3000K
 EL41535BZ 10W / 775 lm / 3500K



Baffle Square

EL44130W (White) 10W / 700 lm / 3000K
 EL44130BZ (Bronze) 10W / 700 lm / 3000K



Reflector Trim

EL44227W (White) 10W / 715 lm / 2700K
 EL44230W (White) 10W / 715 lm / 3000K
 EL44230BZ (Bronze) 10W / 715 lm / 3000K



Adjustable Gimbal Trim

EL41427W (White) 10W / 650 lm / 2700K
 EL41427B (Black) 10W / 650 lm / 2700K
 EL41430W (White) 10W / 650 lm / 3000K
 EL41430B (Black) 10W / 650 lm / 3000K
 EL41435W (White) 10W / 650 lm / 3500K

LED Insert for Interchangeable Trims

ELD4RT1227 12W / 800 lm / 2700K
 ELD4RT1230 12W / 850 lm / 3000K
 ELD4RT1240 12W / 900 lm / 4000K



Reflector Trims

EL4330W (W) (B) (BZ) (C) (CP)



Baffle Trims

EL4331W (W) (B) (BZ) (C) (CP) (N)



Square Baffle Trims

EL4351W (W) (B) (BZ) (N)



Round Pull Down Adjustable



EL49727W (White) 12.7W / 840 lm / 2700K
 EL49730W (White) 12.7W / 840 lm / 3000K
 EL49727B (Black) 12.7W / 840 lm / 2700K
 EL49730B (Black) 12.7W / 840 lm / 3000K
 EL49727BZ (Bronze) 12.7W / 840 lm / 2700K
 EL49730BZ (Bronze) 12.7W / 840 lm / 3000K
 EL49727N (Nickel) 12.7W / 840 lm / 2700K
 EL49730N (Nickel) 12.7W / 840 lm / 3000K

Square Pull Down Adjustable



EL44727W (White) 12.6W / 840 lm / 2700K
 EL44730W (White) 12.6W / 840 lm / 3000K
 EL44727B (Black) 12.6W / 840 lm / 2700K
 EL44730B (Black) 12.6W / 840 lm / 3000K
 EL44727BZ (Bronze) 12.6W / 840 lm / 2700K
 EL44730BZ (Bronze) 12.6W / 840 lm / 3000K
 EL44727N (Nickel) 12.6W / 840 lm / 2700K
 EL44730N (Nickel) 12.6W / 840 lm / 3000K

LED Inserts

5" LED Inserts



JA8 COMPLIANT



TITLE 24 COMPLIANT



DIMMABLE



90+ CRI



INTEGRATED LED

Baffle Trim



EL61027W 10W / 725 lm / 2700K
 EL61030W 10W / 750 lm / 3000K
 EL61040W 10W / 800 lm / 4000K
 EL61130W 14W / 1000 lm / 3000K
 EL61140W 16W / 1100 lm / 4000K
 EL61230W 20W / 1400 lm / 3000K

Deep Baffle Trim



EL62127W 14W / 1000 lm / 2700K
 EL62130W 14W / 1000 lm / 3000K

Square Trim



EL55130W (Baffle) 15W / 1000 lm / 3000K
 EL55230W (Reflector) 15W / 1000 lm / 3000K

Reflector Trim



White
 EL61527W 10W / 670 lm / 2700K
 EL61530W 10W / 690 lm / 3000K
 EL61535W 10W / 710 lm / 3500K
 EL61540W 10W / 730 lm / 4000K
 EL61550W 10W / 750 lm / 5000K
 Bronze
 EL61527BZ 10W / 670 lm / 2700K
 EL61530BZ 10W / 690 lm / 3000K
 EL61535BZ 10W / 710 lm / 3500K

Deep Reflector Trim



EL62527W 14W / 1000 lm / 2700K
 EL62530W 14W / 1000 lm / 3000K

Round Pull Down Adjustable



EL59727W (White) 12.6W / 840 lm / 2700K
 EL59730W (White) 12.6W / 840 lm / 3000K
 EL59727B (Black) 12.6W / 840 lm / 2700K
 EL59730B (Black) 12.6W / 840 lm / 3000K
 EL59727BZ (Bronze) 12.6W / 840 lm / 2700K
 EL59730BZ (Bronze) 12.6W / 840 lm / 3000K

6" LED Inserts

Baffle Trim



EL61027W 10W / 725 lm / 2700K
 EL61030W 10W / 750 lm / 3000K
 EL61040W 10W / 800 lm / 4000K
 EL61130W 14W / 1000 lm / 3000K
 EL61140W 16W / 1200 lm / 4000K
 EL61230W 20W / 1400 lm / 3000K

Deep Baffle Trim



EL62127W 14W / 1000 lm / 2700K
 EL62130W 14W / 1000 lm / 3000K

LED Gimbal Insert Trim



White
 EL61327W 17W / 1150 lm / 2700K
 EL61330W 17W / 1150 lm / 3000K
 Black
 EL61327B 17W / 1100 lm / 2700K
 EL61330B 17W / 1100 lm / 3000K

Square Trim



EL66130W (Baffle) 15W / 1000 lm / 3000K
 EL66230W (Reflector) 15W / 1000 lm / 3000K

Reflector Trim



White
 EL61527W 10W / 670 lm / 2700K
 EL61527W 10W / 690 lm / 3000K
 EL61530W 10W / 710 lm / 3500K
 EL61540W 10W / 730 lm / 4000K
 EL61550W 10W / 750 lm / 5000K
 Bronze
 EL61527BZ 10W / 670 lm / 2700K
 EL61530BZ 10W / 690 lm / 3000K
 EL61535BZ 10W / 710 lm / 3500K

Deep Reflector Trim



EL62527W 14W / 1000 lm / 2700K
 EL62530W 14W / 1000 lm / 3000K

Round Pull Down Adjustable



EL69727W (White) 12.6W / 840 lm / 2700K
 EL69730W (White) 12.6W / 840 lm / 3000K
 EL69727B (Black) 12.6W / 840 lm / 2700K
 EL69730B (Black) 12.6W / 840 lm / 3000K
 EL69727BZ (Bronze) 12.6W / 840 lm / 2700K
 EL69730BZ (Bronze) 12.6W / 840 lm / 3000K
 EL69727N (Nickel) 12.6W / 840 lm / 2700K
 EL69730N (Nickel) 12.6W / 840 lm / 3000K

Disk Lights

Adapter Included



4" Alva LED Disk Light (Wet Location)



ELSF4030W (White) 10W / 725 lm / 3000K
 ELSF4030BZ (Bronze) 10W / 725 lm / 3000K
 ELSF4030N (Nickel) 10W / 725 lm / 3000K

6" Alva LED Disk Light (Wet Location)




ELSF1130W (White) 12W / 850 lm / 3000K
 ELSF1130BZ (Bronze) 12W / 850 lm / 3000K
 ELSF1130N (Nickel) 12W / 850 lm / 3000K

6" Arvid LED Disk Light



ELSF1030W 12W / 900 lm / 3000K
 ELSF1040W 12W / 900 lm / 4000K

GU-10 2-Hour Fire Rated ICA Housing


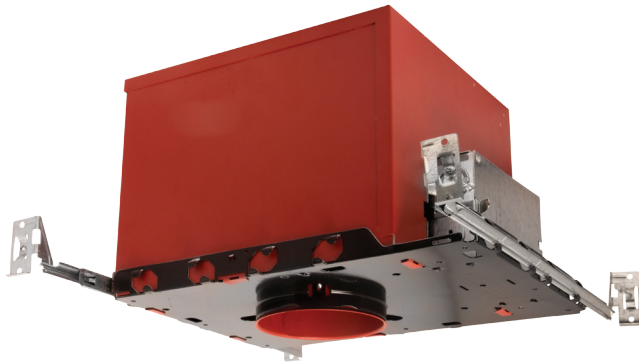


EL39FICA-GU10

3" New Construction Housing

- UL Classified to maintain fire ratings up to two hours
- For use in insulated ceilings
- For use in 2 X 8 Construction
- Integrated non-combustable insulation enhances acoustical protection, dampening sound transfer between floors
- Adjustable housing accommodates up to 1-1/2" ceiling thickness
- Housing meets restricted air flow requirements (per ASTM E-283)
- GU-10 Socket for LED and Traditional GU-10 Lamps
- UL Classified 2 Hour Fire Rating
- UL listed for Damp Locations
- UL listed for Wet Locations (with specified trims)
- UL listed for through branch circuit wiring
- UL listed for direct contact with insulation

Input Voltage	120V
Wattage	35W MAX

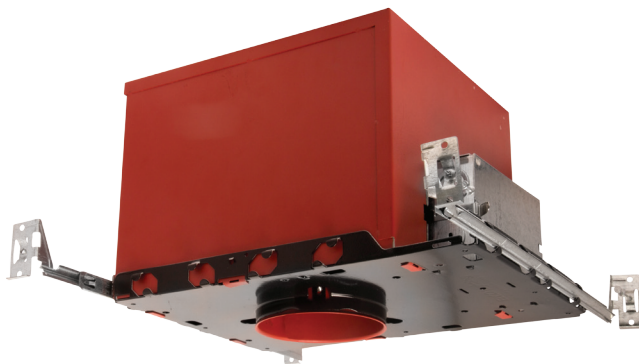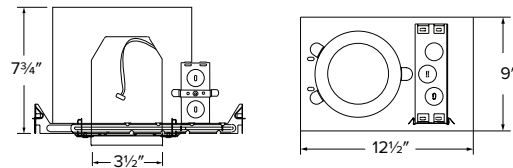


EL49FICA-GU10

4" New Construction Housing

- UL Classified to maintain fire ratings up to two hours
- For use in insulated ceilings
- For use in 2 X 8 Construction
- Integrated non-combustable insulation enhances acoustical protection, dampening sound transfer between floors
- Adjustable housing accommodates up to 1-1/2" ceiling thickness
- Housing meets restricted air flow requirements (per ASTM E-283)
- GU-10 Socket for LED and Traditional GU-10 Lamps
- UL Classified 2 Hour Fire Rating
- UL listed for Damp Locations
- UL listed for Wet Locations (with specified trims)
- UL listed for through branch circuit wiring
- UL listed for direct contact with insulation




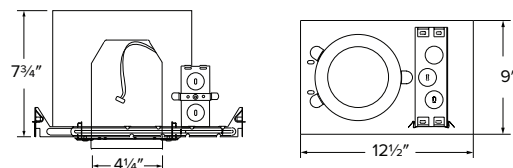





Input Voltage	120V
Wattage	35W MAX















Trims for **GU-10** Housing

For a full selection of GU-10 trims see elcolighting.com

3" TRIMS


ELCO Part#		Description	Finish
EL2320		3" Adjustable Slot Aperture Trim	W, B (All Black), N, BZ
EL2321		3" Adjustable Reflector Square Trim	W, B, C, BZ, G, CN
EL2322		3" Adjustable Square Wall Wash Reflector	W, B, C
EL2393		3" Square Phenolic Baffle Trim	W, B, C, BZ, G, CN
EL2620		3" Die Cast Slot Aperture Trim	W
EL2621		3" Die Cast Adjustable Reflector Trim	W, B, C, BB, BZ, CP, CC, CN
EL2688		3" Die Cast Adjustable Pull Down Trim	W, B (All Black), N, BZ, CP, C
EL2693		3" Die Cast Adjustable Baffle Trim	W, B, BB, BZ, CP, N
EL2619W		3" Adjustable Reflector Wall Wash Trim	C, B

4" TRIMS

ELCO Part#		Description	Finish
EL1412		4" Adjustable Shower Trim, Chrome Reflector with Frosted Lens	W, C, BZ, B, CP, N, SH
EL1415		4" Adjustable Shower Trim, Chrome Reflector with Clear Center Lens	W, C, BZ, B, CP, N, SH
EL1420		4" Adjustable Slot Aperture Trim	W, B (All Black), BZ, CP, N
EL1421		4" Adjustable Reflector Trim	W, B, BB, H, BZ, C, CP, CN
EL1429		4" Reflector Pinhole Trim	C, W, BBZ, B, BN, BCP
EL1488		4" Adjustable Spot Trim	W, B (All Black), BZ, CP, N
EL1493		4" Adjustable Step Baffle Trim	W, B, N, BB, BZ, CP
EL2421		4" Square Reflector Trim	W, B, C, BZ, CN
EL2440		4" Square Gimbal with Baffle	W, B (All Black), BZ, N
EL2443		4" Square Gimbal	W, B (All Black), BZ
EL2484		4" Die Cast Square on Square Trim	W, BZ
EL2493		4" Square Phenolic Baffle Trim	W, B, BZ, N, BB

Finishes: W-All White, B-Black with White Ring, BZ-Bronze, G-Gold with White Ring, C-Clear with White Ring, CP-All Copper, N-All Brushed Nickel, BB-All Black, CC-Clear with Clear Ring, BN-Black with Nickel Ring, SH-Lexan Ring, NW-Nickel White, CN-Clear Nickel, BBZ-Black Bronze

Medium Base (E26) 2-Hour Fire Rated ICA Housing

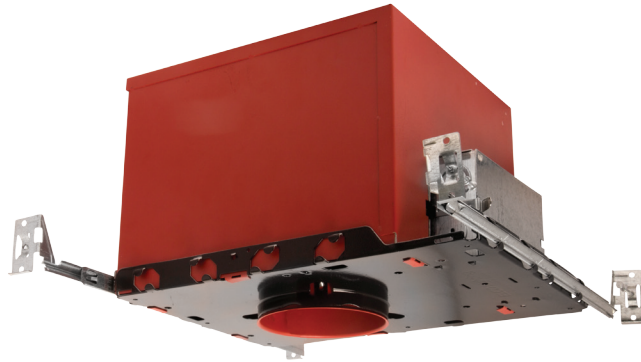


EL99FICA

4" New Construction Housing

- UL Classified to maintain fire ratings up to two hours
- For use in insulated ceilings
- For use in 2 X 8 Construction
- Integrated non-combustable insulation enhances acoustical protection, dampening sound transfer between floors
- Adjustable housing accommodates up to 1-1/2" ceiling thickness
- Housing meets restricted air flow requirements (per ASTM E-283)
- E26 Edison base socket for incandescent or LED lamps
- UL Classified 2 Hour Fire Rating
- UL listed for Damp Locations
- UL listed for Wet Locations (with specified trims)
- UL listed for through branch circuit wiring
- UL listed for direct contact with insulation
- Works with ELCO line voltage 4" Trims

Input Voltage	120V
Wattage	35W MAX

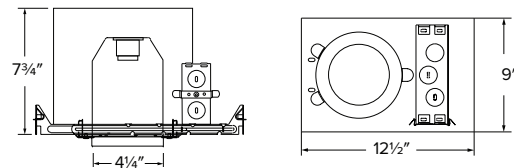


EL5FICA

5" New Construction Housing

- UL Classified to maintain fire ratings up to two hours
- For use in insulated ceilings
- For use in 2 X 8 Construction
- Integrated non-combustable insulation enhances acoustical protection, dampening sound transfer between floors
- Adjustable housing accommodates up to 1-1/2" ceiling thickness
- Housing meets restricted air flow requirements (per ASTM E-283)
- E26 Edison base socket for incandescent or LED lamps
- UL Classified 2 Hour Fire Rating
- UL listed for Damp Locations
- UL listed for Wet Locations (with specified trims)
- UL listed for through branch circuit wiring
- UL listed for direct contact with insulation

Input Voltage	120V
Wattage	75W MAX

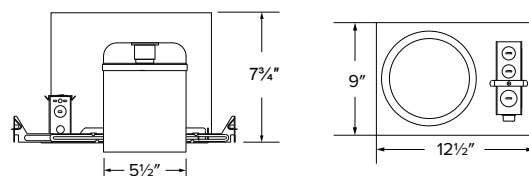

Medium Base (E26) 2-Hour Fire Rated ICA Housing


6" New Construction Housing



EL7FICA

- UL Classified to maintain fire ratings up to two hours
- For use in insulated ceilings
- For use in 2 X 8 Construction
- Integrated non-combustable insulation enhances acoustical protection, dampening sound transfer between floors
- Adjustable housing accommodates up to 1-1/2" ceiling thickness
- Housing meets restricted air flow requirements (per ASTM E-28)
- E26 Edison base socket for incandescent or LED lamps
- UL Classified 2 Hour Fire Rating
- UL listed for Damp Locations
- UL listed for Wet Locations (with specified trims)
- UL listed for through branch circuit wiring
- UL listed for direct contact with insulation
- Works with ELCO line voltage 6" Trims



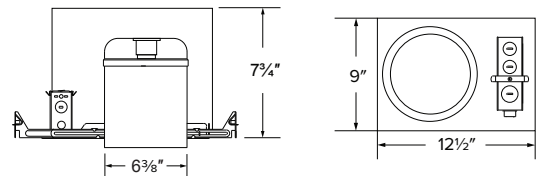






Input Voltage	120V
Wattage	75W PAR30 MAX 90W PAR38 MAX



Trims for **Medium Base (E26)** Housing

For a full trim selection see elcolighting.com

4" TRIMS

ELCO Part#		Description	Finish
EL985		4" Adjustable Gimbal Ring	W, B (all black), BZ, CP, N
EL998		4" Eyeball Trim	W, B, BZ, C, G, N
EL993M		4" Step Baffle Trim	W, B
EL993K		4" Metal Step Baffle Trim With Lampholder Bracket	W, B, BN, BZ, CP, CPB, N, NB, NW
EL999		4" Reflector Trim	B, BB, BZ, C, CC, CN, CP, G, GCP, GG, GN
EL999K		4" Reflector Trim With Lampholder Bracket	W, C, CBZ, G
EL2993		4" Square Trim With Phenolic Baffle	W, B, BB, BBZ, BZ, BZW, N, WBZ
EL2985		4" Square Trim With Gimbal	W, BZ
EL2999		4" Square Reflector Trim	W, B, C, CN, G

5" TRIMS




ELCO Part#		Description	Finish
ELS530K		5" Specular Reflector With Torsion Springs and Lampholder Bracket	W, B, C, G
EL511		5" Metal Splay Baffle Trim	W, B
ELM530K		5" Metal Step Baffle With Torsion Springs and Lampholder Bracket	W, B, BCP, BZ, CP, N
ELM501		5" Airtight Metal Smooth Cone Reflector Trim, Self Flanged (One Piece)	W, B (All Black)
ELS530K		5" Specular Reflector With Torsion Springs and Lampholder Bracket	W, B, C, G
ELS511		5" Airtight Metal Smooth Cone Reflector Trim, Self Flanged (One Piece)	C
EL530K		5" Open Trim With Socket Bracket	W, BZ, CP
EL575		5" Regressed Eyeball With Baffle	W, B, BG, WG, WGG
EL517		5" Adjustable Gimbal Ring	W, B (All Black)
EL576		5" Adjustable Gimbal Ring With Baffle	W, B

Finishes: W-All White, B-Black with White Ring, BZ-Bronze, G-Gold with White Ring, C-Clear with White Ring, H-Haze with White Ring, CP-All Copper, N-All Brushed Nickel, WW-White with White, BB-All Black, GG-All Gold, CC-Clear with Clear Ring, BN-Black with Nickel Ring, GCP-Gold Copper, NW-Nickel White, CN-Clear Nickel, BBZ-Black Bronze, BZW-Bronze White, BCP-Black Copper, BG-Black Gold, WG-White Gold, WGG-White Gold
















Trims for **Medium Base (E26)** Housing

For a full trim selection see elcolighting.com

5" TRIMS


ELCO Part#		Description	Finish
EL518		5" Eyeball Trim	W, BZ, CP, G (All Gold), N
ELM500		5" Airtight Metal Baffle Cone Trim, Self Flanged (One Piece)	W, B
EL577		5" Adjustable Reflector Trim With Gimbal	W, B, C, G








6" TRIMS

ELCO Part#		Description	Finish
EL18		6" Eyeball Trim	W, B (All Black), BZ, CP, G (All Gold), N
ELA101		6" Reflector With Baffle Trim	W, B, BZ, CP, N, NB, NW
EL300		6" Open Trim With Lampholder Bracket	W
EL17		6" Eyeball Trim With Baffle	W, B
ELM48		6" Regressed Eyeball With Baffle Trim	W, B, BB, BG, BGG, BZ, CP, N, NW, WG, WGG
EL317		6" Gimbal Ring Trim, PAR30	W, BZ, CP, G (All Gold)
EL318		6" Gimbal Ring Trim, PAR38	W, G (All Gold), N
EL376		6" Adjustable Baffle Trim With Gimbal, PAR30	W, B, BZ, CP, N
EL476		6" Adjustable Baffle Trim With Gimbal, PAR38	W, B, BZ, CP, N
EL377		6" Adjustable Reflector Trim With Gimbal	W, B, C, G
ELM320		6" Open Top Cone Baffle Trim With Torsion Springs	W
ELM300		6" Airtight Metal Cone Trim, Self Flanged (One Piece)	W, B, BB, BZ
ELM305		6" Shallow Airtight Baffle Trim, Self Flanged (One Piece)	W
EL419		6" Regressed Eyeball With Reflector Trim	WW, BB, BW, CG, CN, CW, GG, GW
ELS311		6" Airtight Chrome Reflector Parabolic Trim With Torsion Springs	C

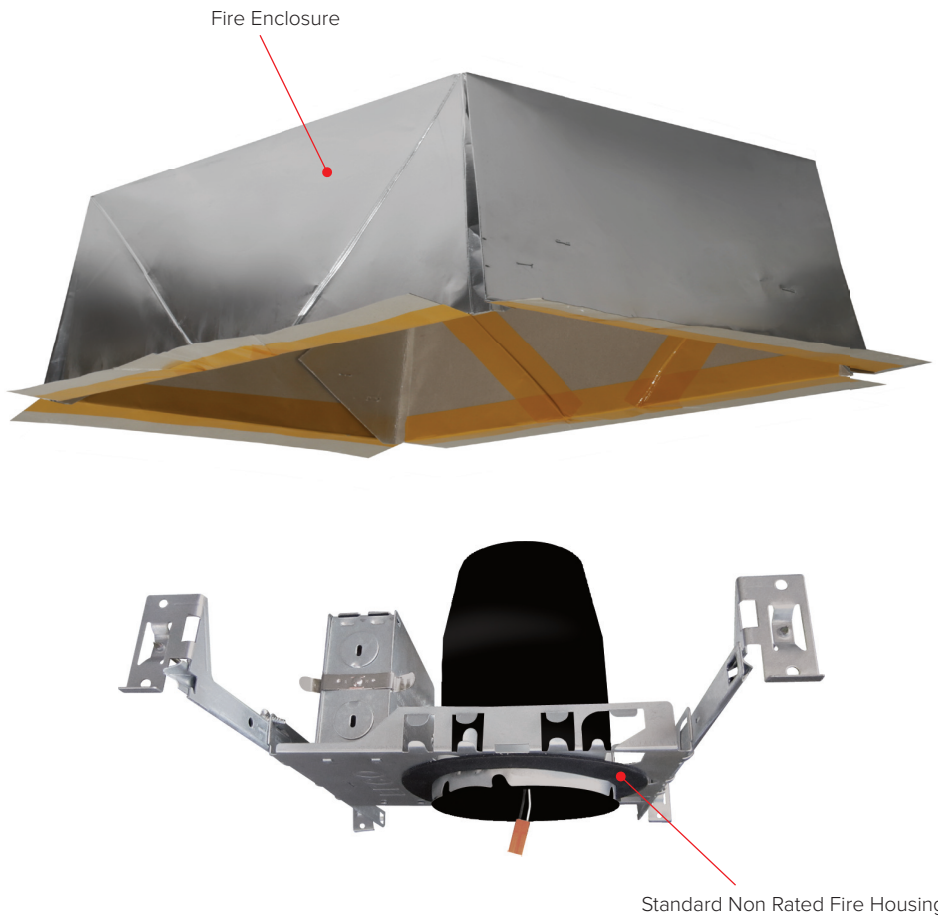
Finishes: W-All White, B-Black with White Ring, BZ-Bronze, G-Gold with White Ring, C-Clear with White Ring, H-Haze with White Ring, CP-All Copper, N-All Brushed Nickel, WW-White with White, BB-All Black, GG-All Gold, CC-Clear with Clear Ring, BN-Black with Nickel Ring, GCP-Gold Copper, NW-Nickel White, CN-Clear Nickel, BBZ-Black Bronze, BZW-Bronze White, BCP-Black Copper, BG-Black Gold, WG-White Gold, WGG-White Gold

1 & 2-Hour Fire Enclosures for Non-Fire Rated Products



APPLICATIONS	FIRE RATING	CONSTRUCTION	FEATURES
 Non Rated Fire Housing  Ceiling Speakers  Ceiling fan	1 - Hour Fire Rated & 2 - Hour Fire Rated	New Construction  Remodel (with access from above) 	 FIRE RATED  SOUND RATED

1 & 2 Hour Rated Enclosures

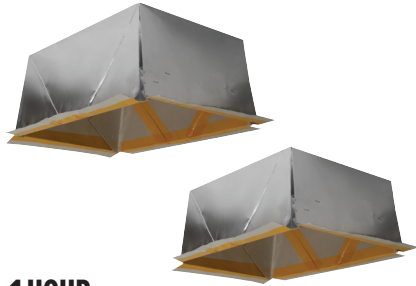

1 HOUR


FIREENCL

Bottom Opening:
20 3/8" L x 14 3/8" W
Top Measurement:
19 3/8" L x 13 3/8" W

Height: 9"

Fire Enclosure

Flexible mica fire enclosure for recessed fixtures. ETL approved for 1-Hour fire resistance. Easy to install. To be used with Mica Fire Tape (sold separately) to seal the power feeding points. Meets the specifications of UL 263, ASTH E119.



FIREENCL-S

Bottom Opening:
16" L x 14 3/8" W
Top Measurement:
15" L x 13 3/8" W

Height: 7 1/4"

Small Fire Enclosure



FIRETAPE

Mica Fire Tape

Fire proof mica adhesive tape helps seal the power feeding point on Fire Enclosure (FIREENCL). Offers outstanding high temperature and flame resistance, and provides excellent electrical insulating. Measures 3/4" W x 16 1/4" L



2 HOUR

FIRECVR

Fire Cover

Recessed fire cover stops flame spread and heat transmission for up to 2 hours. UL rated. UL approved for most major ceiling types. Made of heat activated intumescent material. Measures 9 3/4" H x 17" O.D.

4" Square Junction Box



ELJ442 (4"x4"x2 1/8")

ELJ443 (4"x4"x3 1/2")

4S Junction Box

Can be used in 2-Hour Fire Rated ceiling



6" Alva LED Disk Light

(Wet Location)



ELSF1130W (White)

12W / 850 lm / 3000K



ELSF1130BZ (Bronze)

12W / 850 lm / 3000Kt



ELSF1130N (Nickel)

12W / 850 lm / 3000K

ELCAT1050



EL ELCO Lighting

Customer Service

800.522.2626

customerservice@elcolighting.com

sales@elcolighting.com

Corporate Headquarters

2042 East Vernon Avenue

Vernon, CA 90058

Telephone 323-231-2600

elcolighting.com

Printed in the USA. 08.17

\$10.00

© ELCO Lighting. The marks appearing in this catalog are registered trademarks of ELCO Lighting. Other marks used herein are recognized trademarks of their respective companies.

Products shown in this brochure may be covered by U.S. and international patents. Specifications subject to change without notice.