ELCO Lighting

Project name:

Fixture type:

Date:

4" LED Module & Driver with Reflector Trim



The perfect lighting solution for high-end residential projects with existing housings.

Features

- Module includes LED Module Driver.
- Triac/ELV dimming.
- Can be used in dedicated LED housings from ELCO or used to retrofit medium base (E26) housings.
- Life span of 50,000 hours L70.
- USA designed and assembled.
- Limited 5 year warranty.

Specifications

Wattage	11.4W
Lumens	850 lm
Voltage	120V
Color Temp.	SunsetK
Dimmable	Triac/ELV
Lamp Type	LED
Beam Angle	60°
CRI	93+
Wet Location	Listed

Options



All White | **All Black** | **All Bronze**



Black w/White ring | **Chrome w/White Ring** | **Haze w/White ring**

Technical Details

Optics: Frosted polycarbonate module lens diffuses light evenly throughout while reducing glare with LED technology.

Trim Construction: Reflector is two piece trim for maximum color versatility. Design allows for minimal glare and a strong glare cut-off. Trim is constructed of metal for lasting durability.


LED Technology:

- Extremely accurate Color Rendering Index of 93+.
- Efficacy of 97 lumens per watt.
- Lumen Maintaince of 50,000 hours L70 Life based on LM80 standardized test results.
- Superior Thermal Management by utilizing ELCO Red heat sink.
- Instant On to Full Brightness technology.
- No LED pixilation.

Listings:

- UL Listed for Wet Location.
- RoHS Compliant.
- California Title 24 (JA8-2016-E).

Dimensions

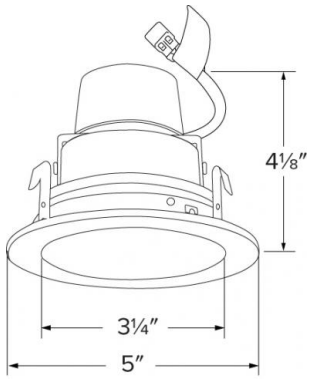

Product Number Builder

Example: **E410R0827W**

ELCO 4" Reflector	Lumens	Color Temp.	Finish
E410R			
	08 850 lm	**27** 2700K	**W** All White
		30 3000K	**BB** All Black
		35 3500K	**BZ** All Bronze
		40 4000K	**B** Black w/White Ring
		50 5000K	**C** Chrome w/White Ring
		SD Sunset	**H** Haze w/White Ring
			MW Matte White
			MB Matte Black

© ELCO Lighting 2022. All rights reserved • Rev. 26 Jan 2022 • ELCO Lighting reserves the right to make specification and design changes without notice.

Compatible Products


For use with **4" LED Inserts**

4" Dedicated LED IC Housings



4" 2-Hour Fire Rated
New Construction

CAT NO.	SPECIFICATIONS
EL49FICA	14W Max.



4" LED Housing
New Construction


CAT NO.	SPECIFICATIONS
EL490ICA	14W Max.



4" LED Housing
Remodel


CAT NO.	SPECIFICATIONS
EL490RICA	14W Max.

4" E26 Base Housings




4" IC Housing
New Construction

CAT NO.	SPECIFICATIONS
EL99ICA	50W Max.




4" IC Housing
Remodel

CAT NO.	SPECIFICATIONS
EL99RICA	50W Max.




4" Non-IC Housing
New Construction

CAT NO.	SPECIFICATIONS
EL99A	50W Max.




4" Non-IC Housing
Remodel

CAT NO.	SPECIFICATIONS
EL99RA	50W Max.



PSA30
Medium base to Ideal terminal connector



PSA31
GU10 to Ideal connector
PSA31 Available for retrofitting GU10 housings (Not shown above)

© ELCO Lighting 2022. All rights reserved • Rev. 26 Jan 2022 • ELCO Lighting reserves the right to make specification and design changes without notice.