

ELH7LV

ELH7LV-277

6" Low Voltage Architectural housing with
12 volt thermally protected transformer.



PROJECT INFORMATION:

Project Name: _____

Fixture Type: _____

Date: _____

DIMENSIONS

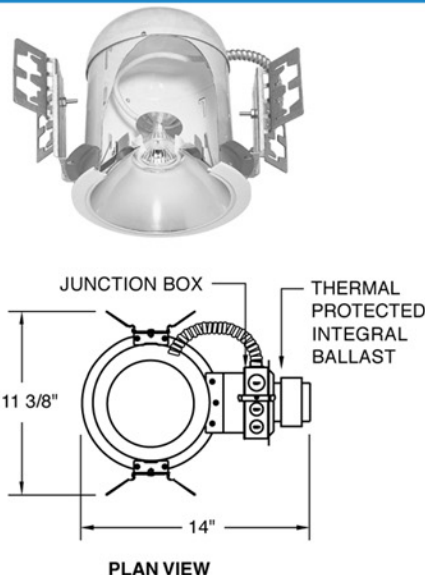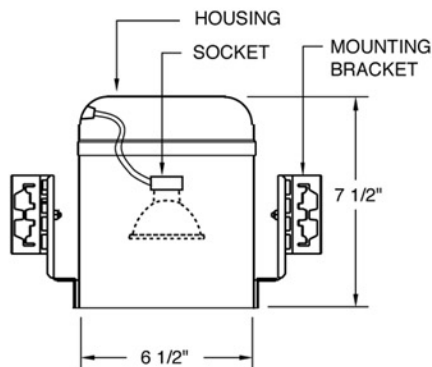

PRODUCT SPECIFICATIONS

Housing Features: For use in insulated ceilings. Integral thermal protector guards against improper lamping. Single wall construction.

Lamp: 12V, 75W Maximum; MR16 or PAR36

Lamp Holder: MR16

Trim Ring: Polycarbonate trim ring, metal trim ring, designed to conceal ceiling cutout.

ELH7LV-277 = 277V TO 12V

INSTALLATION

Junction Box: Pre-wired junction box provided with 1/2" and 3/4" knockout. U.L. listed/C.U.L. listed: for through branch wiring, maximum (8) No. 12 AWG branch circuit conductors (4 in, 4 out). Junction box provided with removable access plates.

Mounting: Hanger bars not included. Order CH26 or FB27

Mounting Frame: Stamped steel material and painted for corrosion resistance.

Labels:

- U.L. listed for damp locations.
- U.L. listed for feed through.

CATALOG NUMBER

Example: ELH7LV-ELA101B

See trims page for variety of trims available.