


7" CFL Horizontal Downlight with Plaster Frame

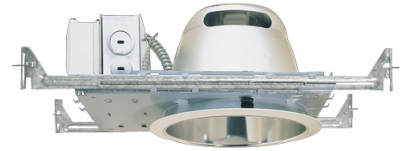


Features

- Compact Fluorescent Housing with Plaster Frame.
- For (1) or (2) horizontally mounted lamps with integral electronic ballast.
- 5 1/4" ht allows use in 2x6 construction.
- Trim support adjusts 3/4" to accommodate different ceiling thicknesses.
- Adjustable hanger bars will span 24" and can be repositioned 90°.
- UL Listed for damp location and feed through.
- Plaster frame with captive bar hangers.

Specifications

Wattage	26W - 52W
Voltage	120/277V
Lamp Type	CFL
Damp Location	Listed

Dimensions

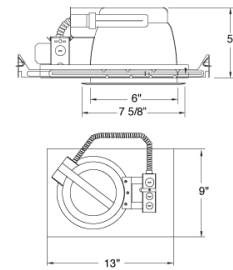

Product Numbers

Item	Description	Lamp type	Watts	Voltage
ELHF7126E	7" CFL Horizontal Downlight with Plaster Frame	CFL	26W	120/277V
ELHF7226E	7" CFL Horizontal Downlight with Plaster Frame	CFL	52W	120/277V
ELHF7132E	7" CFL Horizontal Downlight with Plaster Frame	CFL	32W	120/277V
ELHF7142E	7" CFL Horizontal Downlight with Plaster Frame	CFL	42W	120/277V