

8" Architectural CFL Vertical Downlights




Features

- 8" Vertical Architectural CFL Downlight.
- Energy efficient.
- Single wall construction.
- Integral thermal protector guards against improper lamping.
- Housing equipped with vertically adjustable mounting brackets that accept 1/2" conduit or C-channels (CH26) or linear bar hangers (FB27).
- Hanger bars not included, order CH26 or FB27 separately or use 1/2" EMT pipe.
- Pre-wired junction box provided with 1/2" and 3/4" knockouts.
- Maximum (8) No. 12 AWG branch circuit conductors (4 in, 4 out).
- Junction box provided with removable access plates.
- Housing adjusts 3/4" to accommodate various ceiling thickness.
- UL Listed for damp location and for feed through.

Specifications

Wattage	18W - 70W
Voltage	120/277V
Lamp Type	CFL
Damp Location	Listed

Dimensions

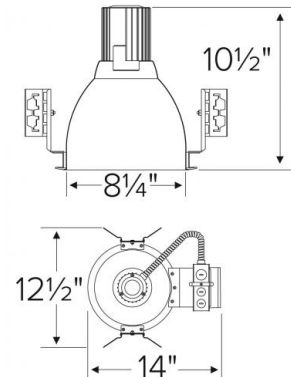

Product Numbers

Item	Description	Lamp type	Watts	Voltage
ELV8118E	8" Architectural CFL Vertical Downlight	CFL	18W	120/277V
ELV8126E	8" Architectural CFL Vertical Downlight	CFL	26W	120/277V
ELV8132E	8" Architectural CFL Vertical Downlight	CFL	32W	120/277V
ELV8142E	8" Architectural CFL Vertical Downlight	CFL	42W	120/277V
ELV8157E	8" Architectural CFL Vertical Downlight	CFL	57W	120/277V
ELV8170E	8" Architectural CFL Vertical Downlight	CFL	70W	120/277V