


P38COB-22-D-50-35-6PK

CRI 80 5000K 1650LM LED Reflector



The high performance LED PAR bulb.
 Perfect for track and recessed light fixtures.
 For commercial or home lighting applications
 Easy to use - designed in traditional bulb shapes and fits easily into existing fixtures

Performance



- LED PAR bulb is designed to provide 25000 hours of life, 22Watt.
- Energy-saving & Super bright, saving 85% energy compared with traditional halogen lamp
- UL compliant.

Construction

- Die-cast Aluminum for excellent heat dissipation
- Dimmable.

Installation

- Rated for indoor use
- Suitable for damp locations.
- Can't be used in totally enclosed fixtures
- Not for use with emergency exit fixtures or emergency exit lights
- Size:Φ4.72"(120mm)*H4.96"(126mm)

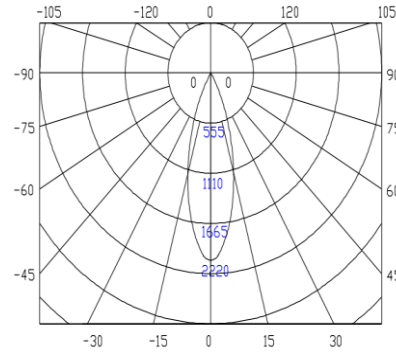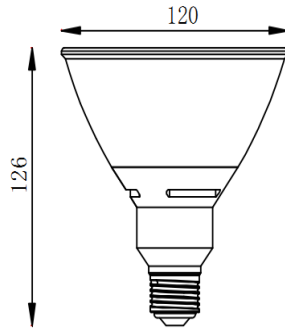

Specifications

Category	Light Bulb	Inner Package Length (Inch)	15.04
Bulb Shape	PAR38	Inner Package Width (Inch)	10.16
Bulb Base Type	E26	Inner Package Height (Inch)	6.1
Bulb Base Finish	Chrome	Inner Package Weight Per Unit (Lbs)	7.33
Color Temperature	5000K	Inner Package Weight Per Unit (Lbs)	6
Beam Angle	35°		
Finish	White		
CRI	80		
Average Life (Hours)	25000		
Estimated Yearly Energy Cost (11 ¢/Kwh)	2.65		
Life Based On 3Hrs/Day (Years)	22.83	Lamp Type	PAR38
Product Length (Inch)	N/A	Dry/Wet/Damp	Damp
Product Width (Inch)	4.72	Energy Star	NO
Product Height (Inch)	4.96	Power Factor	>0.9
Product Extension (Inch)	N/A	Current	205mA
Product Weight Per Unit (Lbs)	0.95	Lumen/Watt	75
Dimmable	YES	Warranty (Year)	3
Watts	22W	DLC (Yes/No)	No
Watt Equivalent	100W	Input Voltage	120V
Lumens	1650	Housing Material	Aluminum
Certification (UL/ETL/FCC)	UL	Lens	Plastic
Individual Box Length (Inch)	4.88	Led Type	Epistar
Individual Box Width (Inch)	4.88		
Individual Box Height (Inch)	5.71		
Individual Box Weight Per Unit (Lbs)	1.09		