


Collection: BLAISE

Installation manual for: LD5003D17 D17"H23"L5

Installation instructions:

- 1.Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3."E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4. Secure mounting bracket to the junction box.
- 5.Insert screws(P2) in side of top unit the mounting bracket.
- 6. Fix the loop (P3) to screw tube, then cover the canopy (P4) and fix it by canopy ring(P5).
- 7. Hanging crystal string (A, B, C, D, E, F, G) on lampbody (P11).
- 8.Install the bulbs(not included) into the lamp fixture.

The end!

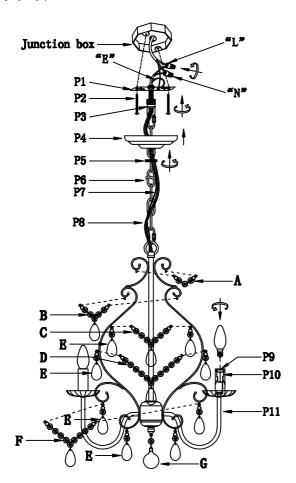

"L" = Hot wire
"N" = Neutral wire
"E" = Ground wire

PARTS LIST

part	picture	Description	Qty	Check	list		
P1		LA" Mounting bracket	1				
P2	_	5/32-32 Screw	2				
P3		Canopy loop (Canopy part)	1				
P4		ø5.3″ canopy plat	1				
P5		Canopy ring (Canopy part)	1				
P6		L59"CHAIN04P Plain Design	1				
P7	\ \	ground wire	1				
P8	~	Power Cord 79" SPT-1-18# Brown	1				
P9		D1"*L2.8" tube	5				
P10	J	E12 lampholder	5				
P11	₩.	D17"+H21" lampbody	1				
A	*	Crystal	5				
В	X	Crystal	5				
С	X	Crystal	5				
D	Y	Crystal	5				
E	<u></u>	Crystal	20				
F	Y	Crystal	5				
G	. Š	Crystal	1				