


Collection:Baxter Installation manual for:

LD2230BK / LD2230BR / LD2230C / LD2230SG L53. 9"W7. 9"H8"L7

Installation instructions:

- 1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3. "E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4. Secure mounting bracket to the junction box.
- 5.Insert screws(P1,P3) in side of top unit the mounting bracket.
- 6. Fix the Mounting bracket (P2) to the Canopy and tighten by the Nuts (P6).
- 7.Install the lampshade(P13) use the Tube(P14) and the lampholder ring(P15).
- 8.Install the bulbs into the lamp fixture.(Bulb not included).

The end!

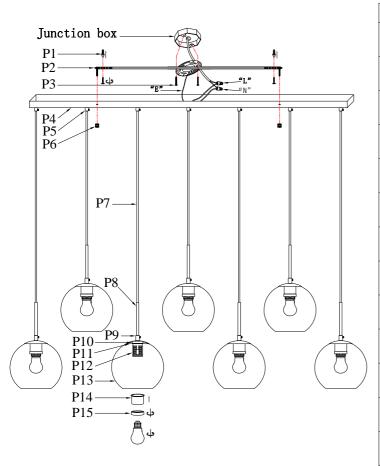

L'' = Hot wire

"N" = Neutral wire

"E" = Ground wire

PARTS LIST

part	picture	Description	Qty	Check list
P1	€	Wall anchor with Screw	2	
P2	-	L27.6" Mounting bracket	1	
P3	(manakananan	5/32 Screw	2	
P4		L48" Metal Canopy	1	
P5		Wire lock	7	
P6		M5 Nut	2	
P7	~	Power Cord 79" 18# Black	7	
P8	•	L5.1" Metal Tube	7	
P9	Q Q	Wire lock	7	
P10		ø1.6" Metal Cover	7	
P11		ø3.5″ Metal Cover	7	
P12		E26 Lampholder	7	
P13		ø7.9"Lampshade	7	
P14		ø2″ Metal Tube	7	
P15		E26 Lampholder Ring	7	