DISTRICT

Collection:Kace


Installation manual for:

LD6169BK W4.8"H13.5"E9" L1

Installation instructions:

- 1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3. "E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4. Secure mounting bracket to the junction box.
- 5.Insert screws (P2) in side of top unit the mounting bracket.
- 6.Put the canopy (P3) on the mounting bracket(P1) and use the screw(P4) to screw tighten.
- 7.Install E26 light source, no include bulb.
- 8.Place the glass shade (P10) on the semicircular cover (P7).

The end!

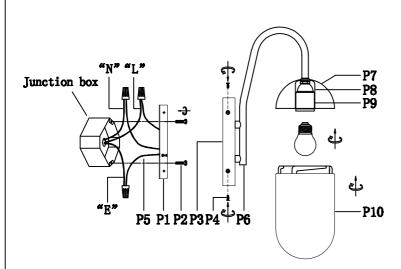

PARTS LIST

part	picture	Description	Qty	Check	list
P1	ō	L5.9°4W4.35° Mounting bracket	1		
P2		5/39-32 Screw	2		
Р3	•	L7 "454.75" Canqy plat	1		
P4	>	Scree	4		
P5	~	Power Cord L2.5° 1832 18ANG Black#Hite	1		
P6	5	Lil" Arm	1		
P7		D4.75" Semicircular cover	1		
P8		Socket cover	1		
P9		E36 Socket	1		
P10		D4. 75"4L7. 5" Glass shade	1		

"L" = Hot wire

"N" = Neutral wire

"E" = Ground wire