

Collection: Nolan


Installation manual for:

LD5034D16BR D16"H13. 2"L6

Installation instructions:

- 1.Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3."E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4. Secure mounting bracket to the junction box.
- 5.Insert screws(P2) in side of top unit the mounting bracket.
- 6. Fix the loop (P3) to screw tube, then cover the canopy (P4) and fix it by canopy ring(P5).
- 7. Mount the (P10) rod on the (P13) lamp body.
- 8.Install the bulbs(not included) into the lamp fixture.

The end!

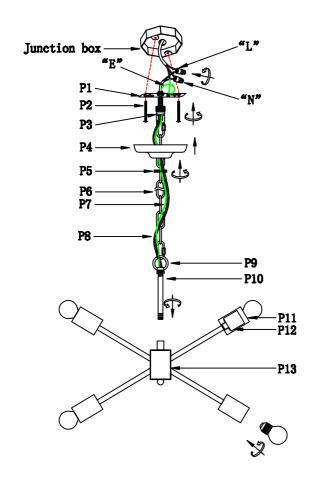

PARTS LIST

part	picture	Description	Qty	Check	list
P1		L4" Mounting bracket	1		
P2	—	5/32-32 Screw	2		
P3	•	Canopy loop (Canopy part)	1		
P4		Ø5.1″ canopy plat	1		
P5		Canopy ring (Canopy part)	1		
P6		L59"CHAINO4P Plain Design	1		
P7	\	ground wire	1		
P8	\	Power Cord 79" SPT-1-18# Brown	1		
P9	Q	W1.5"+H1.7" Quick link	1		
P10	((4))	©0.5″*H5″Metal tube	1		
P11		D1.6"*L2.4" metal lampcap	6		
P12	d	E26 lampholder	6		
P13	X	⊘16" crytal frame	1		

"L" = Hot wire
"N" = Neutral wire

"E" = Ground wire