DISTRICT

Collection:Kace


Installation manual for:

LD6168BK W4.8"H13.5"E9" L1

Installation instructions:

- 1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3. "E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4. Secure mounting bracket to the junction box.
- 5.Insert screws (P2) in side of top unit the mounting bracket.
- 6.Put the canopy (P3) on the mounting bracket(P1) and use the screw(P4) to screw tighten.
- 7.Install E26 light source, no include bulb.
- 8.Place the glass shade (P10) on the semicircular cover (P7).

The end!

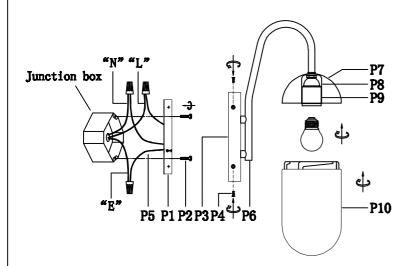

PARTS LIST

	picture	Description	04	Check list
part		Description L5.9"+94.35" Mounting	-	CHECK 118T
P1	•	bracket	1	
P2		5/32-32 Screw	2	
P3	•	L7 "464.75" Canopy plat	1	
P4	>	Screw	4	
P5	\$	Power Cord 12.5' 1832 18AW Black#hite	1	
P6		Lii" Arm	1	
P7		D4.75° Semicircular cover	1	
P8		Socket cover	1	
P9		K26 Socket	1	
P10		D4. 75" 0L7. 5" Glass shade	1	
				<u> </u>

"L" = Hot wire

"N" = Neutral wire

"E" = Ground wire