DISTRICT


Collection: Hugh Installation manual for:

LD6228BK D13.75"H12.5" L1

Installation instructions:

- 1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3. "E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4. Secure mounting bracket to the junction box.
- 5.Insert screws (P4) in side of top unit the mounting bracket.
- 6.Put the canopy (P5) on the mounting bracket(P1) and use the cap nut(P6) to screw tighten.
- 7.Place the glass shade (P13) on the lamp head and twist it with the outer ring of the lamp head.
- 8.Install E26 light source, no include bulb.

The end!

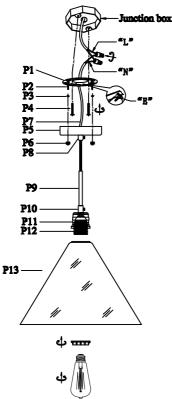

"L" = Hot wire
"N" = Neutral wire
"E" = Ground wire

PARTS LIST

P1	part	picture	Description	Qty	Check list
P3	P1	0	D4" Mounting bracket	1	
P4	P2		5/22-82 Screw	2	
P6	P3	()	Hex not	2	
P6	P4		5/32-32 Screw	2	
P7 Two-core Power Cord 8.6 1	P5		DL 75" Canopy plat	1	
P8	P6		-	2	
P9	P7	\		1	
P10	P8	D	Car iron parts	1	
P11 Socket cover 1 P12 E26 Socket 1 D10 D12.75**45.5**Clase 1	P9		I.4. 15"Tube	1	
P12 E26 Socket 1	P10		Coupling	1	
D13. 75*41.9.5* Glass 1	P11		Socket cover	1	
	P12		E26 Socket	1	
	P13	\triangle		1	
					·
					_