

Collection: Etude


Installation manual for: LD4033W21 W20.9"H5.8"E11.4"L2

Installation instructions:

- 1. Using the screw (P3) secure the mounting bracket (P1) to the junction box.
- 2. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 3. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 4. "E" wire from the fixture is attached to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 5.M4 screw (P2)pass through the holes in canopy plate and tighten by nut (P6).
- 6.Install the lampshade (P12) and tighten by lamp holder ring (P13).
- 7.Install the bulb(not included) in lamp holder (P11).

The end!

"E" = Ground wire

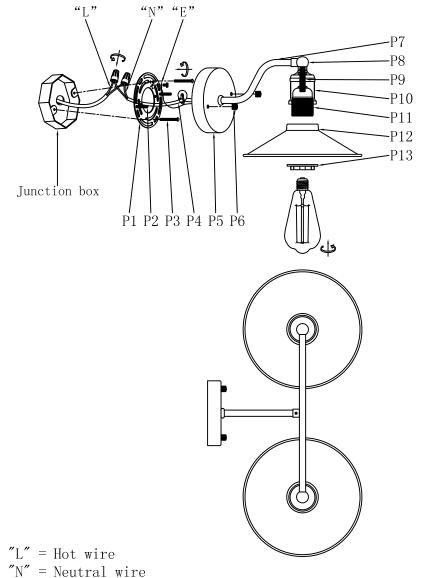

PARTS LIST

picture Description Qty Check list

Par	precure	Description	رعها	Check 113t
P1		Ø 4.0" Mounting bracket	1	
P2	-	M4 Screw	2	
Р3	•	5/32-32 Screw	2	
P4	~	Power Cord 9" SPT-1 18# black	1	
P5		∅ 4.7″Back plate	1	
Р6	•	Nut	2	
P7		Metal arm	1	
Р8	•	Metal arm	1	
Р9		Threaded pipe	2	
P10		Lamp cup	2	
P11		E26 Lamp holder	2	
P12		8.7"Lampshade	2	
P13		E26 Lamp holder ring	2	
	P1 P2 P3 P4 P5 P6 P7 P8 P9 P10 P11 P12	P1	P1 Ø4.0" Mounting bracket P2 M4 Screw P3 5/32-32 Screw P4 Power Cord 9" SPT-1 18# black P5 Ø4.7" Back plate P6 Nut P7 Metal arm P8 Metal arm P9 Intreaded pipe P10 Lamp cup P11 E26 Lamp holder P12 8.7"Lampshade E26 Lamp holder	P1 \$\phi 4.0'' \text{ Mounting bracket}}\$ 1 P2 \$M4 \text{ Screw}\$ 2 P3 \$\frac{5}{32} - 32 \text{ Screw}\$ 2 P4 \$Power \text{ Cord 9'' SPT-1 18# black}\$ 1 P5 \$\phi 4.7'' \text{ Back plate}\$ 1 P6 \$\text{Nut}\$ 2 P7 \$\text{Metal arm}\$ 1 P8 \$\text{Metal arm}\$ 1 P9 \$\text{Threaded pipe}\$ 2 P10 \$\text{Lamp cup}\$ 2 P11 \$\text{E26 Lamp holder}\$ 2 P12 \$\text{8.7''Lampshade}\$ 2 \$\text{E26 Lamp holder}\$ 2