

LIVING DISTRICT


Collection: Taylor











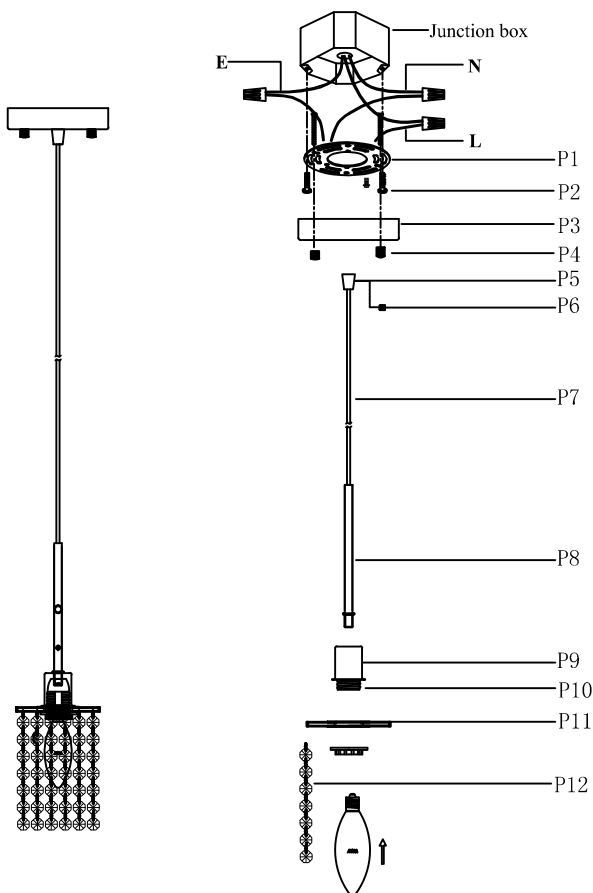

Installation manual for:

LD7500BR L4.7"W4.7"H13.4"L1

Installation instructions:

1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
 3. "E" wire from the fixture is attached to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
 4. Secure mounting bracket to the junction box.
 5. Insert the mounting bracket screw(P2) into the mounting bracket (P1)
 6. Use the Flowering nut(P4) to lock the lamp body to the mounting bracket (P1) on the ceiling.
 7. Hang Crystal(P12)
 8. Install E12 light source.(Bulbs not supplied)
- The end!



Part	Picture	Description	Qty	Check list
P1		Mounting bracket Φ4"*T0.059"	1	
P2		Mounting bracket screw	2	
P3		Canopy (Ø4.7"*H1")	1	
P4		Flowering nut ø0.39"*H0.39"	2	
P5		Tapered iron piece (Ø0.59"*H0.7")	2	
P6		M6 Plastic machine meter screw	2	
P7		18#Three-core transparent wire	1	
P8		Single head tube (Φ0.36"*H6.69")	1	
P9		Anti-edge light cup (Φ1.57"*H1.57"*T0.02")	1	
P10		E12 holder	1	
P11		Flat iron frame (L3.9"*W3.9"*H0.27")	1	
P12		Octagonal beads (seven bunches)	24	

"L" = Hot wire

"N" = Neutral wire

"E" = Ground wire