



## Installation manual for 3505G12C

Dimensions : D11.8" H3.7"

Collection :Eren

Bulb Type : LED G9x5x10W bulb not included

Lamp Weight :11.5 LBS    Install the light bulb, Don't use

Total Weight :14.5 LBS    halogen bulbs, Please use LED  
bulbs, Wattage within 10W.



Thank you for choosing our product(s).

Our Company is actively involved in every step of the production.

Our product(s) are designed to be utilized for every application that graces your home or business.

We pride ourselves in providing the most prompt and courtesy service to all of the valued customers.

Please find the enclosed detailed instruction and read carefully for proper installation.

If you have any questions, please contact the retailer Where the purchased was made.



3505G12C D11.8"H3.7"

### SAFETY

Warning: MAKE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF. BY EITHER REMOVING THE FUSE OR TURNING OFF THE CIRCUIT BREAKER.

### CAUTION

- Before assembling the lighting fixture, please read all instructions carefully.
- All frame & crystal components are fragile, please handle with care.
- Required supply circuit : 110 - 130V/60Hz
- Labeled wires are "L" for live wire, "N" for neutral wire, "E" for ground wire.
- Never install fixture on damp ceiling, the room should be dry and well ventilated
- All electrical components must be installed by a licensed electrician and in accordance with the National Electrical Code and the appropriate local electrical codes.


### Unpack the Package

Please open the box carefully and check all the items are inside the box. If you have any installation, assembling and missing parts questions. where you purchase from and any other relevant information ready, our customer service team will provide comprehensive and worry free service to our valued customers.

01

3505G12C D11.8"H3.7"

## Frame Assembly Diagram

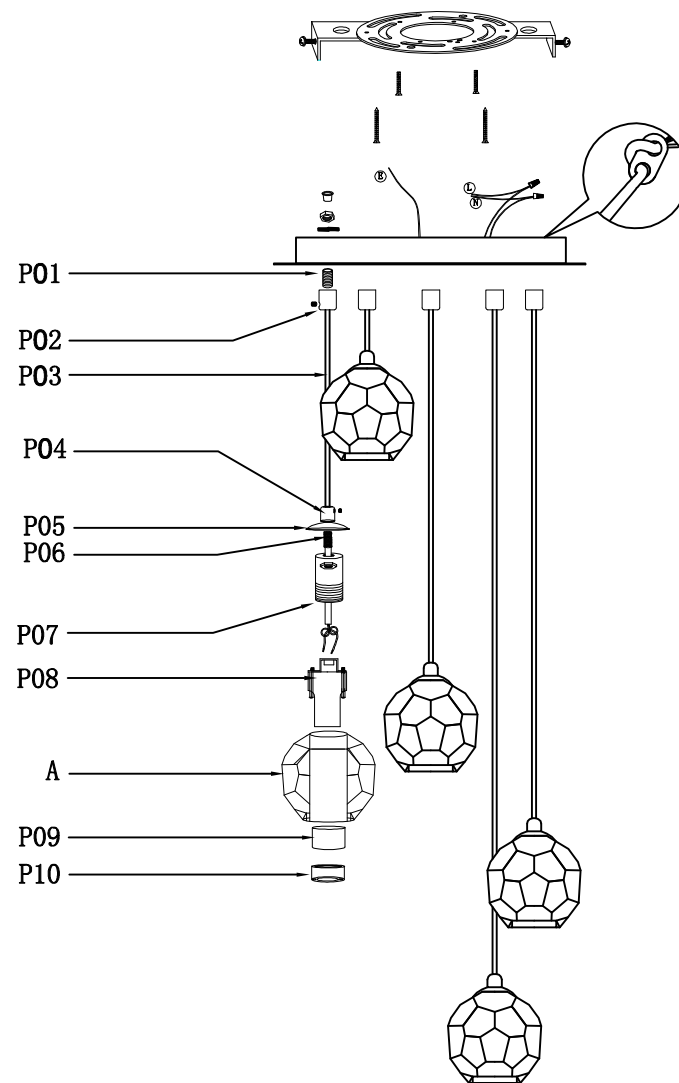














02

3505G12C D11.8"H3.7"



Step 1

Please use the partslist to ensure you are not missing any parts.

PARTS LIST

Parts number	Picture	Description	Qty	Diagram number
MB9R20		Ceiling Plate	1	ZB
P-3505G12C-1		canopy	1	ZD
		M4*12 screw	2	ZE
P-3505G12C-2		M10*15 threaded rod	5	P01
		Iron accessories	5	P02
		electric wire	5	P03
		Iron accessories	5	P04
		Flying saucer	5	P05
		M10*20 threaded rod	5	P06
		M25*H40 Aluminium part	5	P07
		G9 lamp holder	5	P08
		Straight pipe	5	P09
		Spare part	5	P10

3505G12C D11.8"H3.7"

Parts number	Picture	Description	Qty	Diagram number
P-3505G12C-2		"U" Spanner	1	
CR3505-85CL		Crystal	5	A

3505G12C D11.8"H3.7"


Parts number	Picture	Description	Qty	Diagram number

05

3505G12C D11.8"H3.7"

Step 2

### Canopy Installation Instruction

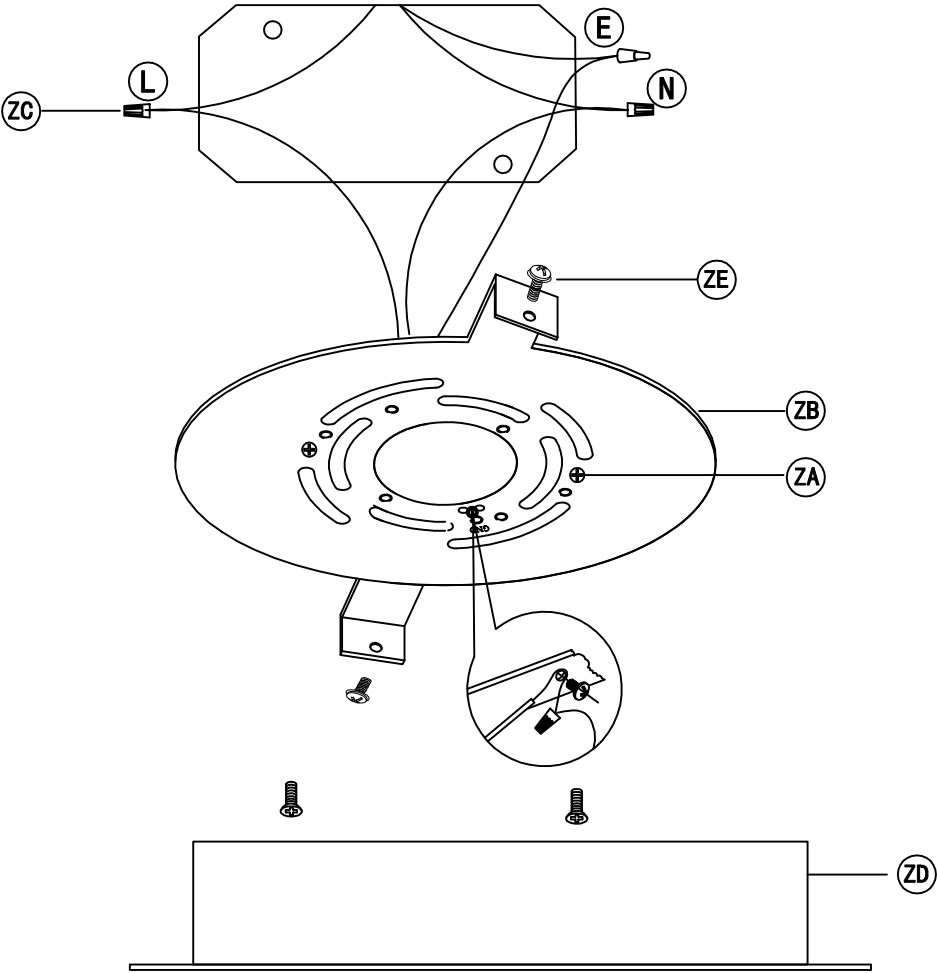

06

3505G12C D11.8"H3.7"

**IMPORTANT:** Test sockets with bulb before dressing the fixture.


1. Use two screws (ZA) to fix the Ceiling Plate (ZB) on the ceiling; which are not supplied and should already be in your box.
2. Be sure when connecting the wire use electrician approved junction caps (ZC).
3. Stow the excess wire in the canopy (ZD).
4. Align the canopy (ZD) with the hanging plate screw, fix the lamp on the ceiling, tighten and fix it with a M4\*12 screw (ZE).

07

3505G12C D11.8"H3.7"

Step 3

## Frame Assembly Diagram

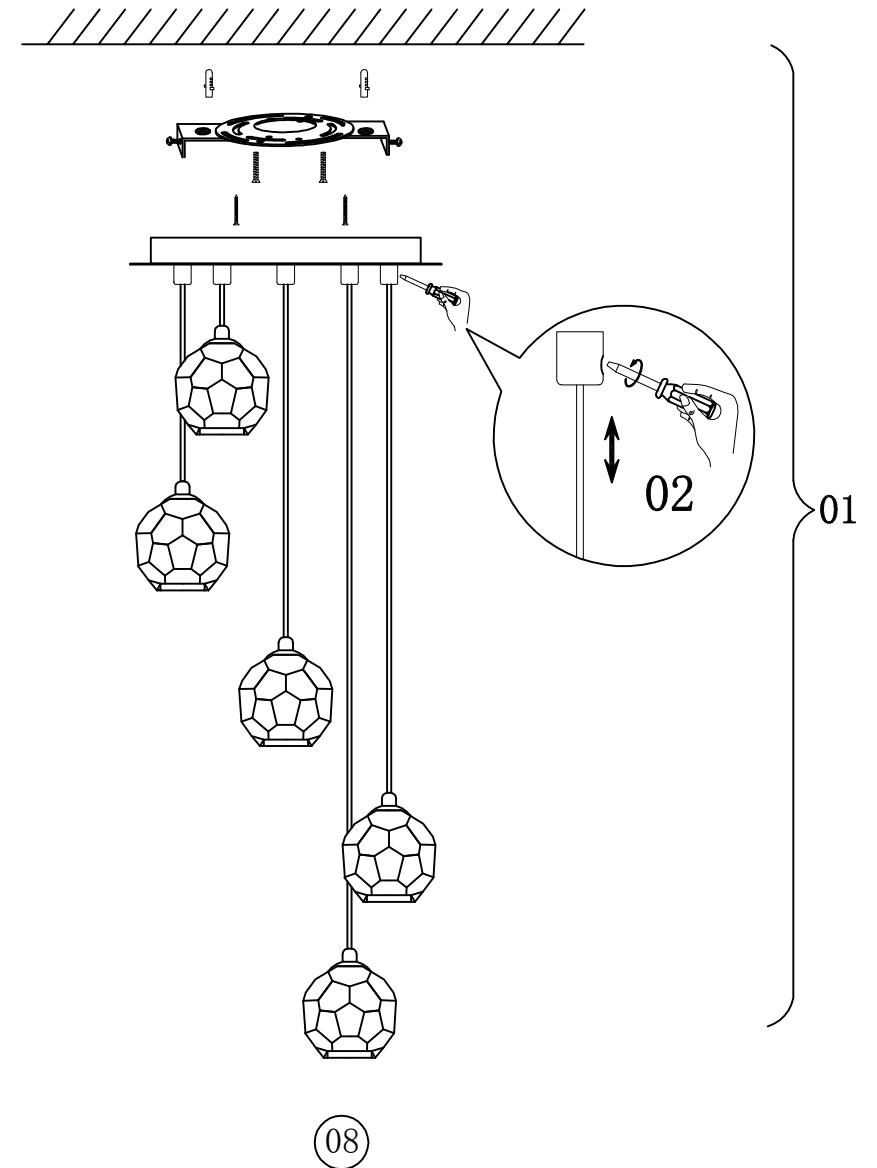

08


## Frame Assembly Instructions

### Installation:

Please read all instructions carefully. Before you proceed to install, make sure that the power supply is turned off and remains off until installation is complete. Please note that each part has been assigned a number. Please proceed in a numerical order.

1. Fixed the Ceiling Cover on the Mounting Bracket (01), then put the screws tightened.
2. Loosen the Meter screw with a screwdriver, adjust the power cord to a suitable length, and then tighten the Meter screw (02).

## Crystal Dressing Diagram

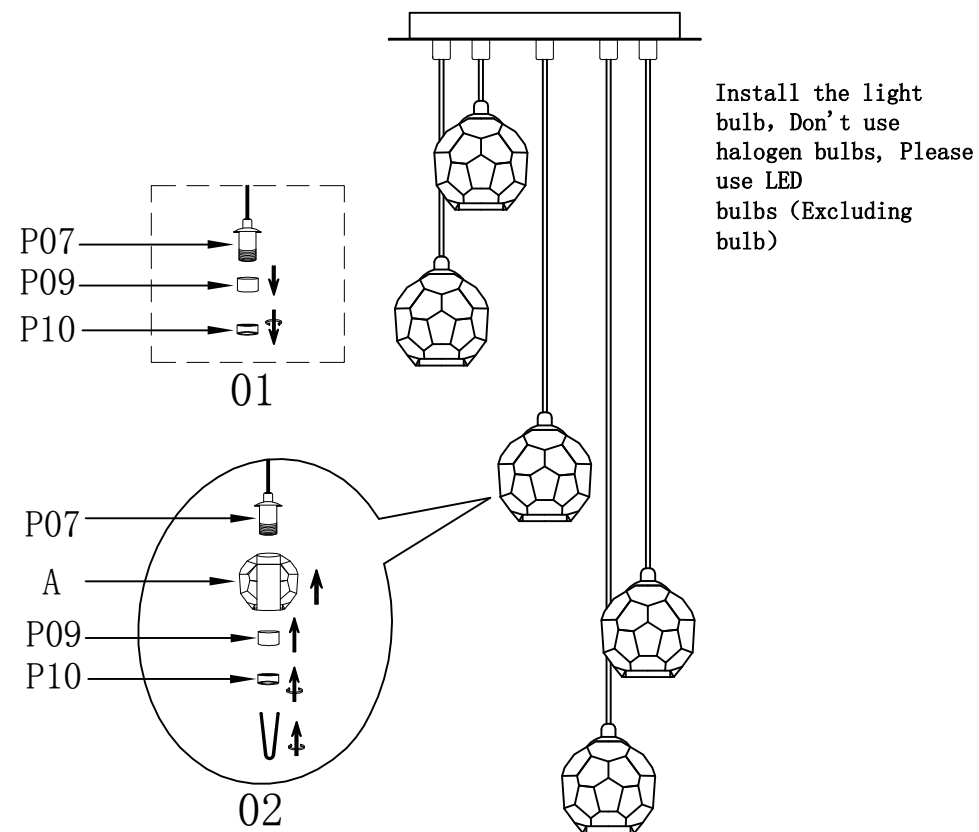

01. Unscrew the lamp holder ring (P10) counterclockwise, and then remove the iron tube (P09);
02. Put the crystal lampshade (A) on the lamp cup (P07), hold it by hand, and then put it into the iron tube (P09), Then fix it to the lamp cup (P07) with the lamp ring (P10), and finally tighten it with a "U" wrench .

3505G12C D11.8"H3.7"

## Congratulations !

You are now done installing your Elegant Lighting fixture. Sit back and admire each crystal as it will become the statement piece for your room/house.

Thank you.

3505G12C D11.8"H3.7"

### **Cleaning and Maintenance of Chandelier Frame**

The finish on our chandelier frames and fixture frames is protected by a durable coating of lacquer. To clean, use a clean soft, dry cloth. Do not use any metal polishes, cleaners, abrasives or any substance which could remove the protective finish. Failure to follow these instructions automatically voids the guarantee.

### **Cleaning and Maintenance of Crystals**

Wet a soft cotton fabric in clean warm water and wipe gently, then polish with a dry soft cotton fabric.

### **To Order Crystal Replacement Parts**

Should you require replacement crystals or pins (the metal connectors attaching the crystals), contact the store where the product was purchased or contact us . For ease of ordering, you may use the original crystal trimming instructions provided with this product and circle the items you wish to order, indicating the quantity by writing the number needed adjacent to the circle . You will be contacted with prices prior to shipment. All orders must be pre-paid.

3505G12C D11.8"H3.7"

### Elegant Lighting Warranty

The finish and frame of your new chandelier or fixture are warranted for a period of one (1) year from the date of purchase. Our company will, at its option, repair or replace any frame that has a defect in the materials or workmanship during the warranty period. All crystals are guaranteed for their original quality during the life of the chandelier. Breakage is not covered by this warranty.

To make a claim under this warranty, contact our customer service department.

A written return authorization form will be sent to you with specific instructions.

3505G12C D11.8"H3.7"

### Returns and Conditions of Warranty

Returns must be pre-authorized by contacting our customer service department. Returns will only be accepted with a written return merchandise authorization and return shipping charges pre-paid. We reserve the right to inspect all returned merchandise to fully determine the nature of any defect. This guarantee shall not apply to any product that has been changed, altered or otherwise modified, nor shall it apply to any product that has been repaired or altered by anyone other than a pre-authorized facility. We will not be responsible for any breakage or damages incurred during transit, nor for crystal parts or metal frame part that have been subject to misuse, negligence, accident or inappropriate handling. Also, we will not be held responsible for damage incurred during improper installation or wiring by others, nor for damages resulting from a failure to follow the recommended maintenance or installation procedures. This guarantee is issued in lieu of any and all other guaranteed or warranty, whether written or implied and any and all other obligations or liabilities. Further, we neither authorize nor permit any other person or firm to assume for us, any liability in connection with the sale of our products.