

Installation manual for: 2102D20C/RC

Collection: Cabaret Dimensions: D20"H20"L9

Bulb Type: G9 bulb, include bulb

Total Weight: 33.88 LBS



HOTLINE AT: service team is committed to assisting you, please call our toll free our priority. We enclosed detailed instructions on how to install your designers and craftsmen intend to give a professional insight on the finest quality crystal products for our customers. Our master thoroughly. If you have any questions, our professional customer light fixture properly. Please read all instructions carefully and lighting design and product quality. Prompt and efficient services are Thank you for choosing our exquisite products. We are providing

1-888-388-3390





SAFETY

Warning: MAKE SURE THE ELECTRICITY TO THE WIRES YOU ARE

WORKING ON IS SHUT OFF.BY EITHER REMOVING THE FUSE OR TURNING OFF THE CIRCUIT BREAKER.

CAUTION

- Before assembling the lighting fixture, please read all instructions carefully.
- All frame & crystal components are fragile, please handle with care
- Required supply circuit: 110 130V/60Hz
- Labeled wires are "L" for live wire, "N" for neutral wire, "E" for GND.
- Never install fixture on damp ceiling, the room should be dry and well ventilated.
- All electrical components must be installed by a licensed electrician and in accordance with the National Electrical Code and the appropriate local electrical codes.

Unpack the Package

Please open the box carefully and check all the items are inside the box. If you have any installation, assembling and missing parts questions, please call our Customer Service department at 1-888-388-3390. Please have model number(at the front page), where you purchase from and any other relevant information ready, our customer service team will provide comprehensive and worry free service to our valued

Returns and Conditions of Warranty

connection with the sale of our products any other person or firm to assume for us, any liability in obligations or liabilities. Further, we neither authorize nor permit accident or inappropriate handling. Also, we will not be held or metal frame part that have been subject to misuse, negligence, changed, altered or otherwise modified, nor shall it apply to any defect. This guarantee shall not apply to any product that has been warrantee, whether written or implied and any and all other responsible for damage incurred during improper installation or product that has been repaired or altered by anyone other than a all returned merchandise to fully determine the nature of any accepted with a written return merchandise authorization and department at the address on the reverse side. Returns will only be This guarantee is issued in lieu of any and all other guaranteed or follow the recommended maintenance or installation procedures. wiring by others, nor for damages resulting from a failure to breakage or damages incurred during transit, nor for crystal parts pre-authorized facility. We will not be responsible for any return shipping charges pre-paid. We reserve the right to inspect Returns must be pre-authorized by contacting our customer service

Elegant Lighting Warranty

The finish and frame of your new chandelier or fixture are warranted for a period of two (2) years from the date of purchase. Our company will, at its option, repair or replace any frame that has a defect in the materials or

workmanship during the warranty period. All crystals are guaranteed for their original quality during the life of the chandelier. Breakage is not covered by this warranty.

To make a claim under this warranty, contact our customer service department at the address and phone number shown below. A written return authorization form will be sent to you with specific instructions.

CUSTOMER SERVICE DEPARTMENT

500-550 E. Erie Avenue

Philadelphia, PA 19134

Tel: 215-423-8880

Fax: 215-423-8882

(3)

(104)

2102D20 D20"H20"L9

Step 1


Please use the parts list to ensure you are not missing any parts.

2102D20

1 2 38.4") 1 1 1 1 1 1 1 1 1 1 1 1 1 1	Plate Crystal shade (\$\phi 20") Both end threaded pipe(\$\phi 0.5"*L7.9") Knurl washer Cap nut (\$\phi 3.1") G9 Socket Socket cover(\$\phi 0.87"*H2.83", Chrome, Iron) Rubber gasket		P17 P18 P19 P20
	M10 Nipple (L1.8") Plate Crystal shade (\$\phi 20") Both end threaded pipe(\$\phi 0.5 \) Knurl washer Cap nut (\$\phi 3.1") G9 Socket Socket cover(\$\phi 0.87"*H2.83",Cl		P17 P18 P19
	M10 Nipple (L1.8") Plate Crystal shade (\$\phi 20\text{"}) Both end threaded pipe(\$\phi 0.5) Knurl washer Cap nut (\$\phi 3.1\text{"}) G9 Socket		P17
	Plate Crystal shade (\$20") Both end threaded pipe(\$0.5 Knurl washer Cap nut (\$3.1")		P17
	Plate Crystal shade (\$20") Both end threaded pipe(\$0.5) Knurl washer		1
	Plate Crystal shade (\$\phi20") Both end threaded pipe(\$\phi0.5]		91d
	Plate Crystal shade (\$\phi 20")		P15
	Plate (L1.8")		P14
	M10 Nipple (L1.8"))	P13
			P12
	Loop	Ð	P11
	Clear Round Electrical Wire(18#,L133")		P10
2	Chain(CHAIN04PCH, L98.4")		P09
1	Quick link	G	P08
	Loop	C	P07
Throme) 1	Cast canopy(D5"*H1.6",Chrome)		90d
1	Ground screw		P05
1	M4 Lock washer	••••	P04
1	M10 Nipple (L2.6")		P03
10	M10 Hex nut	X	P02
70.98") 1	Mounting bracket (L4.1"*W0.98")		P01
2	Mounting bracket screw		ZG
1	Loop	C	ZF(P07)
Throme) 1	Cast canopy(D5"*H1.6",Chrome)		ZE(P06)
70.98") 1	Mounting bracket (L4.1"*W0.98")		ZD(P01)
3	Junction Caps	<u>////</u>	ZC
1	GND		ZB
le) 1	Electrical box (not include)		AZ
Qty Check list	Description	picture	part

	11	G9 Bulb	<u>ģ</u>	P33
	4	M3*0.3" Screw	Ţ.	P32
	-	Plate		P31
	1	M4*0.23" Screw	Ţ	P30
	1	Hickey	Œ	P29
	1	M10 Nipple (L2.8")		P28
	2	Cable buckle	00	P27
	2	Heat shrink tubing		P26
	2	Junction caps	al	P25
	2	Cable tie		P24
	9	M10 Washer		P23
	9	M10 Lock washer	••••	P22
Qty Check list	Qty	Description	Picture	Part

Frame
e Assembly
y Diagram

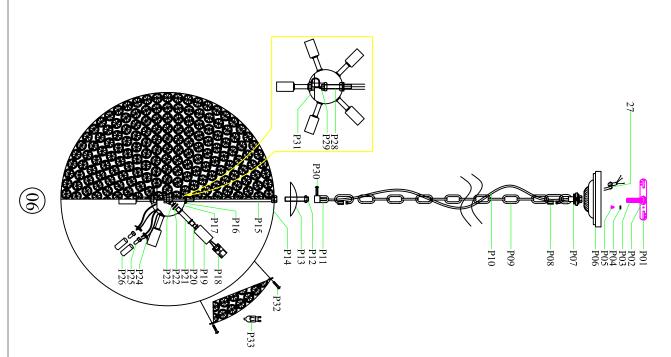



Cleaning and Maintenance of Chandelier Frame

The finish on our chandelier frames and fixture frames is properties.

The finish on our chandelier frames and fixture frames is protected by a durable coating of lacquer. To clean, use a clean soft, dry cloth.Do not use any metal polishes,

cleaners, abrasives or any substance which could remove the protective finish.

Failure to follow these instructions automatically voids the guarantee.

Cleaning and Maintenance of Crystals

Wet a soft cotton fabric in clean warm water and wipe gently, then polish with a dry soft cotton fabric.

To Order Crystal Replacement Parts

Should you require replacement crystals or pins (the metal connectors attaching the crystals), contact the store where the product was purchased or contact us at the address shown on the reverse side. For ease of ordering, you may use the original crystal trimming instructions provided with this product and circle the items you wish to order, indicating the quantity by writing the number needed adjacent to the circle and faxing it to our customer service department at

215-423-8882. You will be contacted with prices prior to shipment. All orders must be pre-paid.

Congratulations!

You are now done installing your Elegant Lighting fixture. Sit back and admire each crystal as it will become the statement piece for your room/house.

If you require any additional assistance, please contact us at 1-888-388-3390.


Thank you.

Step 2

IMPORTANT: Test sockets with bulb before dressing the fixture.

- 1 .Attach the Mounting bracket(ZD) to the electrical box(ZA).
- 2 .Pull wires up through the Junction Caps(ZC).
- 3 .Attach the Canopy(ZE) to the Ceiling panel.
- 4 .Make the electrical connections as detailed in the drawing above.

Canopy Installation Instruction



"L" = Hot wire

"N" = Neutral wire

"E" = GND



2102D20 D20"H20"L9

Step 3

Frame Assembly Instructions

Please read all instructions carefully

Before you proceed to install, make sure that the power supply is turned off and remains off until installation is complete.

Please note that each part has been assigned a number.

Please proceed in a numerical order.

- 1. Install the mounting bracket (01) together with the junction box, then fix the canopy (02) on the mounting bracket by Loop (03)
- 2.Loosen the screw(05) that's on the lamp shade for replace G9 bulb(06), then fasten the screw(05).

The end!

