HINGISTRICT

Collection: Hanson Installation manual for:


LD7035W28SG W27.6" E7.7" H11.7" L3

Installation instructions:

- 1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3. "E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4. Secure mounting bracket to the junction box.
- 5.Insert the mounting bracket screw(P2) into the mounting bracket (P1)
- 6.Use the screw(P3) to lock the lamp body to the mounting bracket (P1) on the ceiling.
- 7.Install E12 light source.(Bulbs not supplied)
- 8. Twist the glass ball(P11) onto the lamp body(P7)

The end!

PARTS LIST

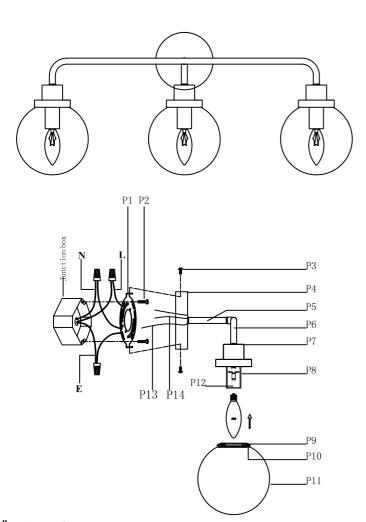

Part Number	Part	Picture	Description	Qty
MB7R01	P1	Ò	mounting bracket Φ4.53″*H0.59″	1
	P2		Mounting bracket screw	2
P-LD7035W28SG-1	Р3	•	Screw	2
	P4		Backplate (Φ4.72"*H0.98")	1
	Р5		head tube (L4.8"*H2.6")	1
	Р6		Three head tube (L22.3"*H2.6")	1
	P7		Double layer cup Ф3"*H1.8"	3
	Р8		Tube Φ1.2"*H2.0"	3
	P12		E12 holder	3
	P13	\	UL18#Ground wire, L9.84"	1
	P14	\approx	UL18#, L6″	1
GS7R03SG	Р9	ø	Aluminum ring Φ2.7"*H0.3"	3
	P10		Plate Φ1.8"*T0.1"	3
	P11		Glass shade Φ5.9"*H5.7"	3

[&]quot;L" = Hot wire

[&]quot;N" = Neutral wire

[&]quot;E" = Ground wire