

LIVING DISTRICT



Collection:Senna

Installation manual for:

LD7322W16SG W16"*E7.5" H11.8" L2

Installation instructions:

1. Black wire from ceiling(junction box) attaches to "L" wire from the fixture.
 2. White wire from ceiling(junction box) attaches to "N" wire from the fixture.
 3. "E" wire from the fixture is attached to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
 4. Secure mounting bracket to the junction box.
 5. Install the lamp body to the mounting bracket by Nut(P3).
 6. Locking the Fabric shade(P12) on the lamp body by socket rings(P9).
 7. Install E12 light source.(Bulbs not supplied) .
- The end!

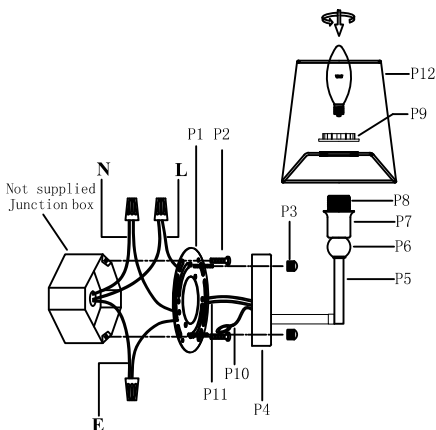

| Part Number | Part | Picture | Description | Qty |
|-----------------|--------|---------|-------------------------------|-----------------------------|
| MB7S03 | P1 | | Mounting bracket Φ4"*H1.2" | 1 |
| | P2 | | Mounting bracket screw | 2 |
| P-LD7322W16SG-1 | P3 | | Nut | 2 |
| | P4 | | Backplate (Ø4.7"*H1") | 1 |
| | P5 | | Lamp arm(W10.5"*H5") | 1 |
| | P6 | | Flat ball (Φ1.2"*H1") | 2 |
| | P7 | | Socket Cup (Φ1.6"*H1.4") | 2 |
| | P8 | | E12 holder | 2 |
| | P9 | | Socket rings | 2 |
| | P10 | | UL18#Ground wire,L9.8" | 1 |
| | P11 | | UL18#,L8" | 1 |
| | FS7R02 | P12 | | Fabric shade (Φ6"*H6.3") |

"L" = Hot wire

"N" = Neutral wire

"E" = Ground wire