

ELEGANT
FURNITURE & LIGHTING™


Collection: York

Installation manual for:

OD305H13BK L6.5" H12.5" E6.5" L1

Installation instructions:

1. Install E26 light source. (Bulbs not supplied)
2. Put glass (P21) into body (P18) and stick sponge (P17) on clips. Finally curve clips to fix glass
3. Connect cover (P15) with body (P18) and put rubber ring (P11) and screw (P12) to fixable
4. Use hook (P10) connect (P13). Twist off screw and mat from the hanging ring (P8) and across the middle hole of canopy (P5) and use screw and mat lock in again.
5. Use explosion screw (P1) to ceiling
6. Use screw (P4) fixable mounting bracket (P3)
7. Black wire from ceiling (junction box) attaches to "L" wire from the fixture.
8. White wire from ceiling (junction box) attaches to "N" wire from the fixture.
9. "E" wire from the ceiling attaches to "E" wire from the fixture.
10. Screw (P2) through to canopy hole (P5) and then put rubber ring (P6) and twist screw cap (P7) to fix mounting bracket (P3).

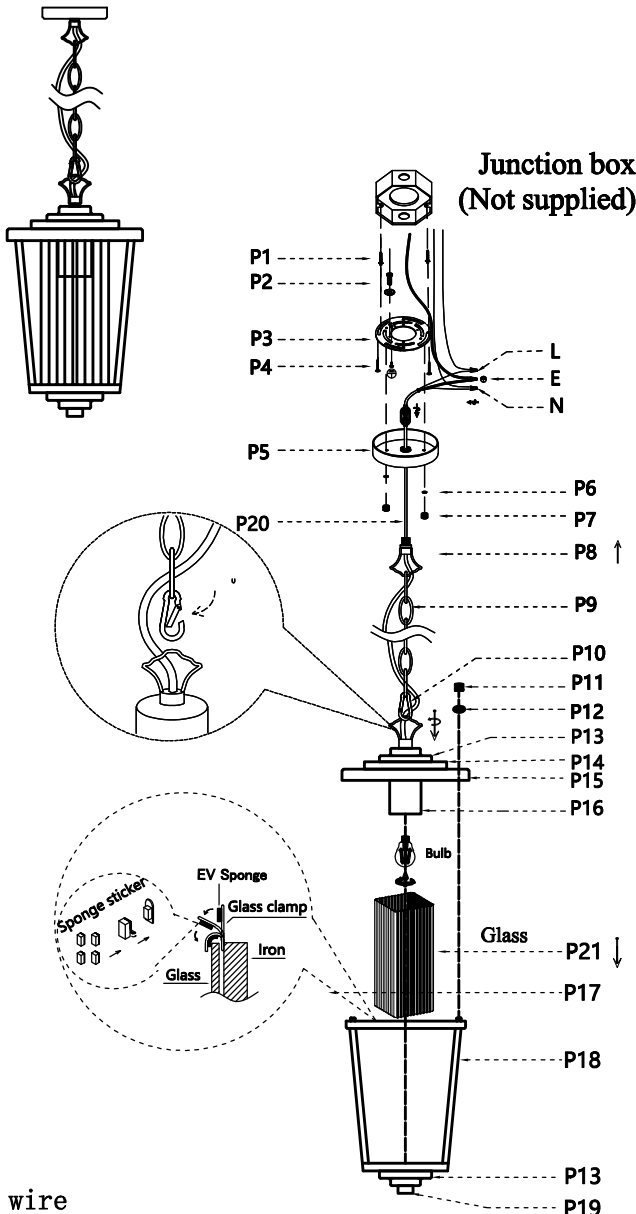

"L" = Hot wire
"N" = Neutral wire
"E" = Ground wire

Part Number	Part	Picture	Description	Qty
CP12H01BK	P1		Explosion screw	2
	P2		Screws M4	2
	P3		Mounting bracket Ø3.94	1
	P4		Screws M4	2
	P5		Canopy (Ø4.7" * 0.78")	1
	P6		Rubber ring	2
	P7		Screw cap	2
Chain04PBK	P8		Hanging rings L1.57" * W0.59" * H1.57"	1
	P9		Chain (L39")	1
	P10		Hook (L1.57" * W0.78" * H0.15")	1
P-OD305H13BK-1	P11		Screw cap	2
	P12		Rubber ring	2
	P13		70*70*18MM Box	2
	P14		110*110*10MM Box	1
	P15		170*170*12MM Cover	1
	P16		E26 Holder	1
	P17		EV Sponge Sponge sticker	4
	P18		160*160*205MM Body	1
	P19		Ø20*12MM Column parts	1
	Cord-59-18#-BK	P20		UL18#, L59" Black
GS12L3	P21		85*85*200MM Glass	1