


Collection: York

Installation manual for:

OD305H15BK L10" H14.5" E10" L1

Installation instructions:

- 1.Install E26 light source.(Bulbs not supplied)
- 2 Put glass(P22)into body(P18) and stick sponge on clips(P17). Finally curve clips to fix glass.
- 3. Connect cover(P15) with body(P18) and put rubber ring(P12) and screw(P11) to fixable
- 4 .Use hook(P10)connect(P13). Twist off screw and mat from the hanging ring(P8) and across the middle hole of canopy(P5) and use screw and mat lock in again.
- 5.Use explosion screw (P1) to ceiling
- 6.Use screw(P4) fixable mounting bracket(P3)
- 7.Black wire from ceiling(junction box) attaches to "L"wire from the fixture
- 8. White wire from ceiling(junction box) attaches to "N"wire from the fixture
- 9."E" wire from the ceiling attaches to "E" wire from the fixture.
- 10. Screw (P2) through to canopy hole(P5) and then put rubber ring(P6) and twist screw cap(P7) to fix mounting bracket(P3).

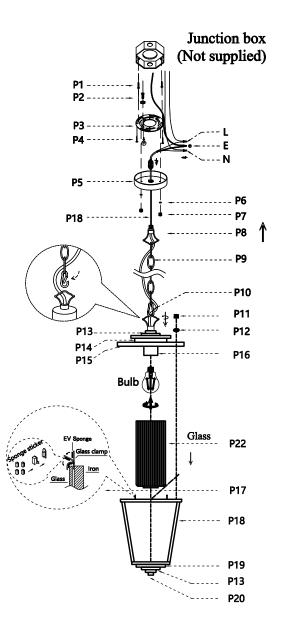



Part Number	Part	Picture	Description	Qty
СР12Н01ВК	P1	1	Explosion screw	2
	P2	1	Screws M4	2
	Р3	0	Mounting bracket Ø3.94	1
	P4	1	Screws M4	2
	P5		Canopy (Ø4.7"*0.78")	1
	P6	0	Rubber ring	2
	P7	m	Screw cap	2
	P8	₿	Hanging rings L1.57"*W0.59"*H1.57"	1
ChainO4PBK	P9	0	Chain (L39")	1
	P10	· (Hook (L1.57"*W0.78"*H0.15")	1
P-OD305H15BK-1	P11	<u>m</u>	Screw cap	2
	P12	0	Rubber ring	2
	P13		70*70*18MM Box	2
	P14		150*150*25MM Box	1
	P15		250*250*15MM Cover	1
	P16		E26 Holder	1
	P17	0.4	EV Sponge Sponge sticker	4
	P18	*	230*230*245MM Body	1
	P19		110*110*10MM Box	1
	P20		Ø20*12MM Column parts	1
Cord-59-18#-BK	P21	-	UL18#,L59"Black	1
GS12L4	P22		110*110*240MM Glass	1