


Collection:Gaul









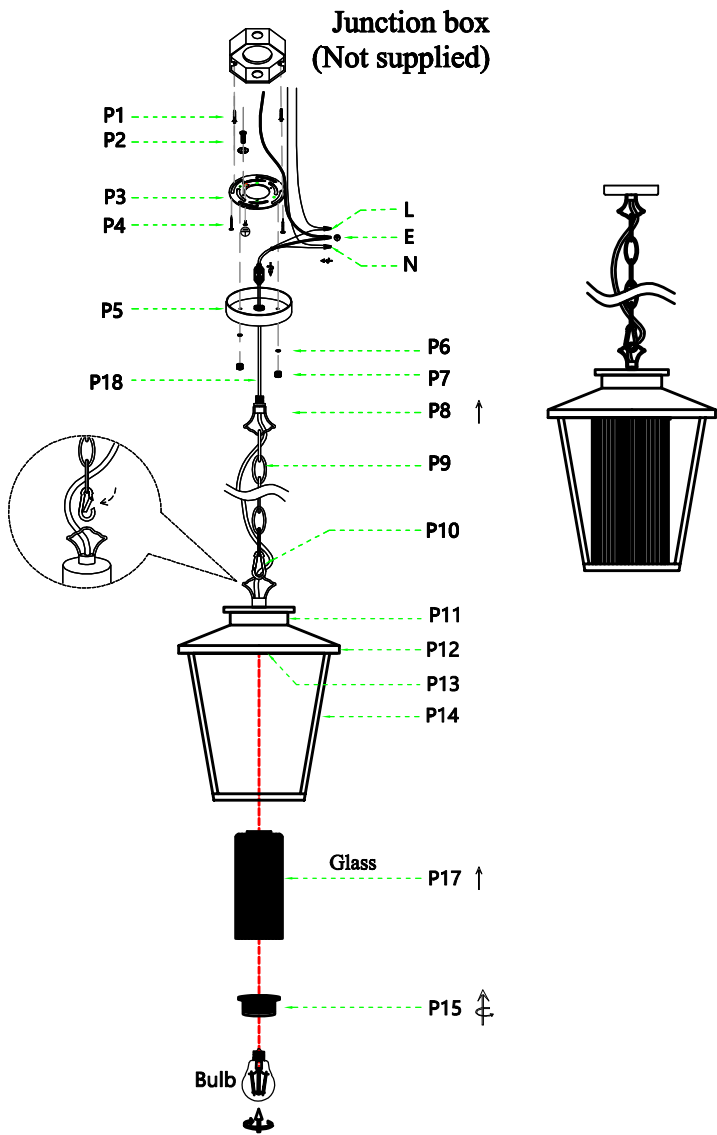








Installation manual for:

OD306H14BK L10" H13.5" E10" L1

Installation instructions:

- 1 Install glass (P17) to lamp body(P14).
- 2.Use socket ring(P15) to lock in glass (P17) .
- 3.Install E26 light source.(Bulbs not supplied)
- 4.Use hook(P10)connect(P11).Twist off screw and mat from the hanging ring(P8) and across the middle hole of canopy(P5) and use screw and mat lock in again.
- 5.Secure mounting bracket to the junction box.
- 6.Black wire from ceiling(junction box) attaches to "L"wire from the fixture
- 7.White wire from ceiling(junction box) attaches to "N"wire from the fixture
- 8."E" wire from the ceiling attaches to "E" wire from the fixture.
- 9.Screw (P2) through to canopy hole(P5) and then put rubber ring(P6) and twist screw cap(P7) to fixable



Part Number	Part	Picture	Description	Qty	
CP12H01BK	P1		Explosion screw	2	
	P2		Screws M4	2	
	P3		Mounting bracket Ø3.94	1	
	P4		Screws M4	2	
	P5		Canopy(Ø4.7"*0.78")	1	
	P6		Rubber ring	2	
	P7		Screw cap	2	
	P8		Hanging rings L1.57"*W0.59"*H1.57"	1	
	Chain04PBK	P9		Chain (L39")	1
		P10		Hook (L1.57"*W0.78"*H0.15")	1
P-OD306H14BK-1	P11		110*110*21MM Box	1	
	P12		252*252*60*T1.0MM Cover	1	
	P13		E26 Holder	1	
	P14		243*243*240MM Body	1	
	P15		Socket ring	1	
Cord-59-18#-BK	P16		UL18#,L59"Black	1	
GS12L5-1	P17		110*110*228MM Glass	1	

"L" = Hot wire
 "N" = Neutral wire
 "E" = Ground wire