


Collection:Ludlow

Installation manual for:

OD308P17BK L6" W6" H16.5" L1

Installation instructions:

- 1.Put glass(P16)into body(P10).
- 2.Twist socket ring(P8) to lock in glass
- 3.Install E26 light source.(Bulbs not supplied) .
- 4.Connect cover(P7)with body(P11) and then lock in
- 5.Black wire from ceiling(junction box) attaches to "L"wire from the fixture
- 6.White wire from ceiling(junction box) attaches to "N"wire from the fixture
- 7."E" wire from the ceiling attaches to "E" wire from the fixture.
- 8.Use explosion screw to fix location and use explosion screw(P1) to screw base(P2).
- 9.Put lamp body into base(P2) and screw in(P13)

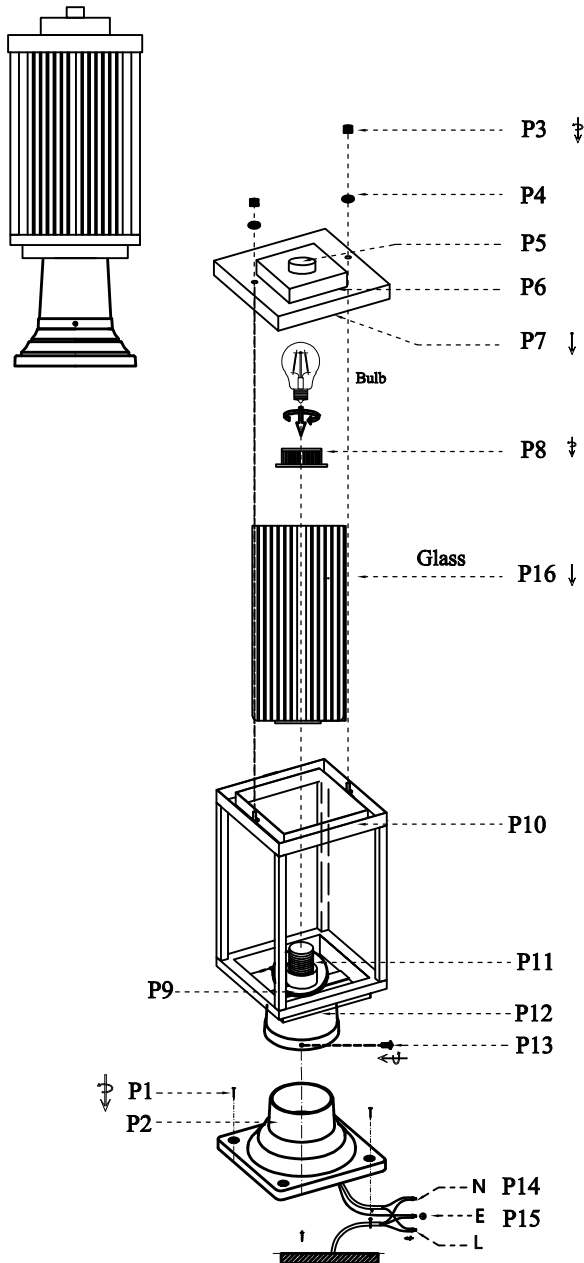

Part Number	Part	Picture	Description	Qty
LB12P01	P1		Explosion screw M4	4
	P2		5.5"*2.95" Lamp base	1
P-OD308P17BK-1	P3		Screw cap	2
	P4		Rubber ring	2
	P5		$\phi 20*12\text{MM}$ Column part	1
	P6		80*80*20MM Box	1
	P7		155*155*20MM Box	1
	P8		Socket ring	1
	P9		$\phi 62*10\text{MM}$ ring	1
	P10		150*150*257MM Body	1
	P11		E26 Holder	1
	P12		lamp pole (3.38"*3.22")	1
	P13		Screws M4	3
	P14		UL18#,L11.8"Black+White	1
	P15		UL18#Ground wire,L9.8"	1
	GS12L7	P16		110*110*235MM GLASS

"L" = Hot wire
 "N" = Neutral wire
 "E" = Ground wire