


Collection: Mercer
Installation manual for:

OD313H14BK L6.5" W6.5" H13.5" L1

Installation instructions:

1. Install E26 light source. (Bulbs not supplied)
3. Put glass (P18) into body (P16) and stick sponge on clips (P15). Finally curve clips to fix glass.
4. Connect cover (P13) with body (P16) and use rubber ring (P12) and screw cap (P11) to lock in
5. Use hook (P10) connect (P11). Twist off screw and mat from the hanging ring (P8) and across the middle hole of canopy (P5) and use screw and mat lock in again.
6. Black wire from ceiling (junction box) attaches to "L" wire from the fixture
7. White wire from ceiling (junction box) attaches to "N" wire from the fixture
8. "E" wire from the ceiling attaches to "E" wire from the fixture.
9. Screw (P2) through to canopy hole (P5) and then put rubber ring (P6) and twist screw cap (P7) to fix mounting bracket (P3).

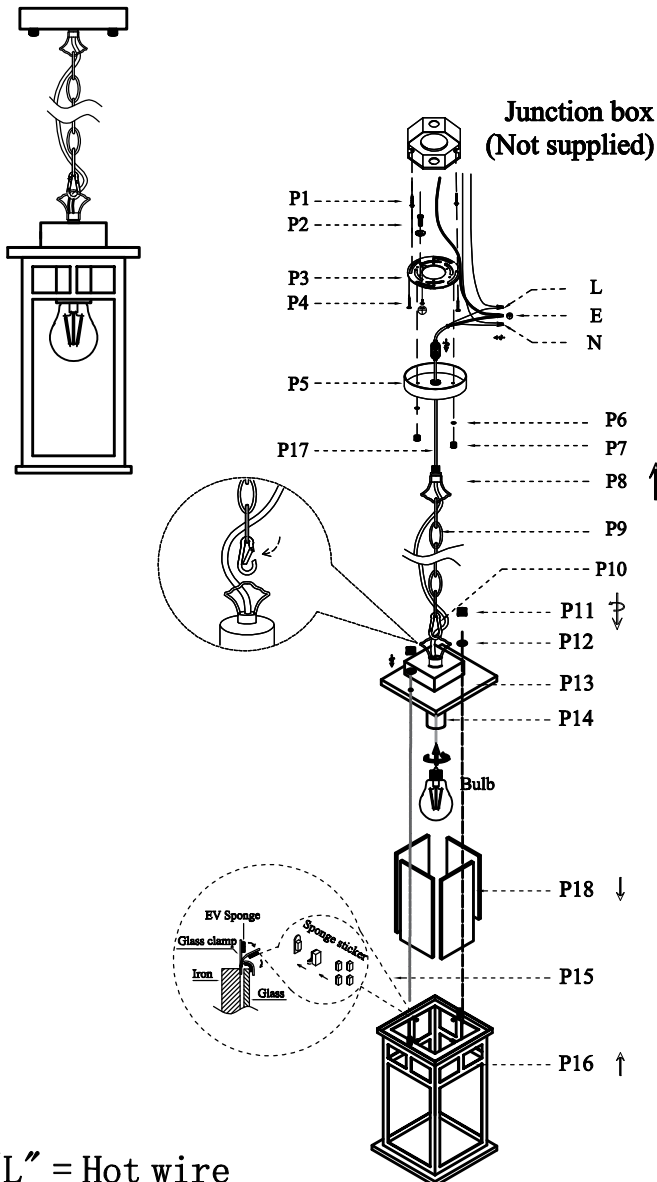

"L" = Hot wire
"N" = Neutral wire
"E" = Ground wire

Part Number	Part	Picture	Description	Qty
CP12H01BK	P1	↓	Explosion screw	2
	P2	↓	Screws M4	2
	P3	⊙	Mounting bracket Ø3.94	1
	P4	↓	Screws M4	2
	P5	⊙	Canopy (Ø4.7" * 0.78")	1
	P6	⊙	Rubber ring	2
	P7	⊞	Screw cap	2
Chain04PBK	P8	⊙	Hanging rings L1.57" * W0.59" * H1.57"	1
	P9	⋮	Chain (L39")	1
	P10	⋮	Hook (L1.57" * W0.78" * H0.15")	1
P-OD313H14BK-1	P11	⊞	Screw cap	2
	P12	⊙	Rubber ring	2
	P13	⊞	160*160*42MM Cover	1
	P14	⊞	E26 Lamp Holder	1
	P15	⊞	EV Sponge Sponge sticker	12
	P16	⊞	155*155*273MM Body	1
Cord-59-18#-BK	P17	⋮	UL18#, L59" Black	1
GP12L1	P18	⊞	L252*W115MM Glass	4