










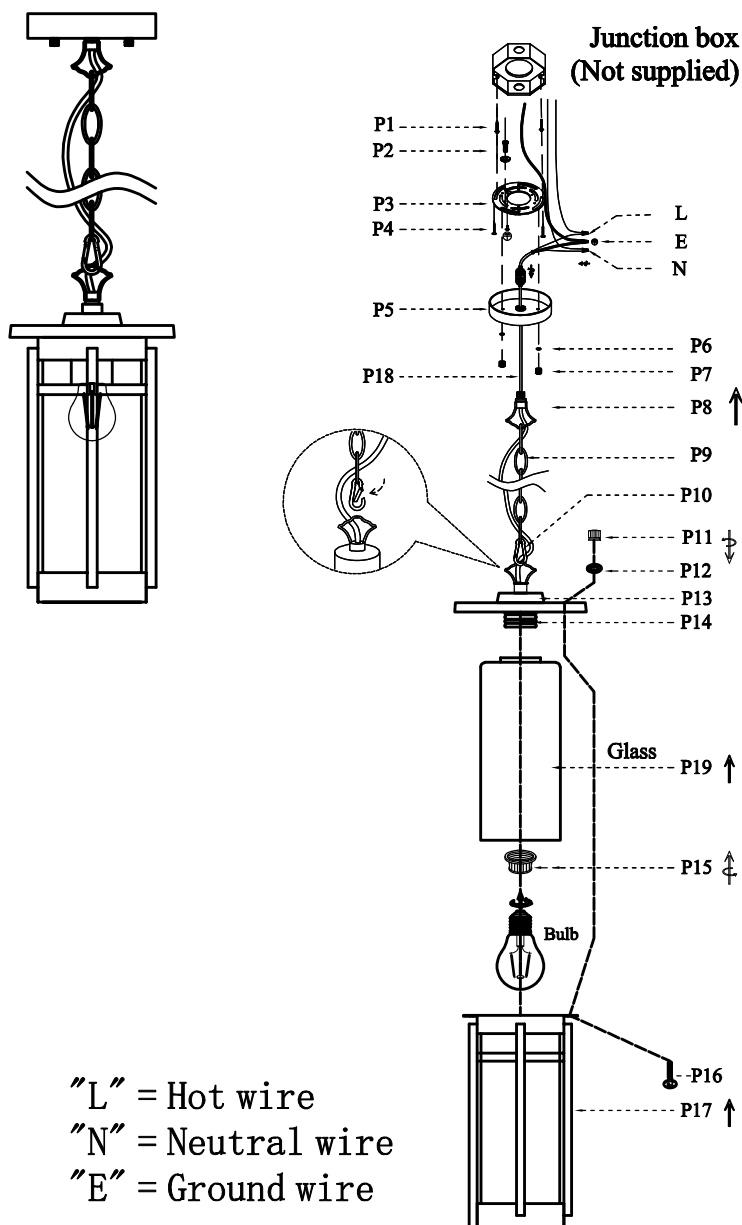










Collection: Livingston  
 Installation manual for:

OD321H14BK L6.5" W6.5" H13.5" L1

**Installation instructions:**

1. Install glass (P19) to cover(P13) .
2. Use socket ring(P15) to lock in glass (P19)
3. Install E26 light source.(Bulbs not supplied)
4. Connect cover(P13)with body(P17) and put screw(P16) to fixable.and use rubber ring(P12) with screw caps(P11) to fixable.
5. Use hook(P10)connect(P13).Twist off screw and mat from the hanging ring(P8) and across the middle hole of canopy(P5 ) and use screw and mat lock in again.
6. Black wire from ceiling(junction box) attaches to "L"wire from the fixture
7. White wire from ceiling(junction box) attaches to "N"wire from the fixture
8. "E" wire from the ceiling attaches to "E" wire from the fixture.
9. Screw (P2) through to canopy hole(P5) and then put rubber ring(P6) and twist screw cap(P7) to fixable.



Part Number	Part	Picture	Description	Qty
CP12H01BK	P1		Explosion screw	2
	P2		Screws M4	2
	P3		Mounting bracket Ø3.94	1
	P4		Screws M4	2
	P5		Canopy(Ø4.7"*0.78")	1
	P6		Rubber ring	2
	P7		Screw cap	2
Chain04PBK	P8		Hanging rings L1.57"*W0.59"*H1.57"	1
	P9		Chain (L39")	1
	P10		Hook (L1.57"*W0.78"*H0.15")	1
P-OD321H14BK-1	P11		Rubber ring	2
	P12		Screw cap	2
	P13		167*167*24MM Cover	1
	P14		E26 Holder	1
	P15		Socket ring	1
	P16		Mounting bracket screw M4	2
	P17		145*110*280MM Body	1
Cord-59-18#-BK	P18		UL18#,L59"Black	1
GS12L12	P19		100*100*240MM Glass	1