


Collection:Hilton

Installation manual for:

OD330H15BK L6" W6" H15" L1

**Installation instructions:**

- 1.Install E26 light source.(Bulbs not supplied)
- 2.Put glass(P15)into body(P12) and stick sponge on clips(P13).Finally curve clips to fix glass.
- 3.Use hook(P10)connect(P11).Twist off screw and mat from the hanging ring(P8) and across the middle hole of canopy(P5 ) and use screw and mat lock in again.
- 4.Black wire from ceiling(junction box) attaches to "L"wire from the fixture
- 5.White wire from ceiling(junction box) attaches to "N"wire from the fixture
- 6."E" wire from the ceiling attaches to "E" wire from the fixture.
- 7.Screw (P2) through to canopy hole(P5) and then put rubber ring(P6) and twist screw cap(P7) to fix mounting bracket(P3).

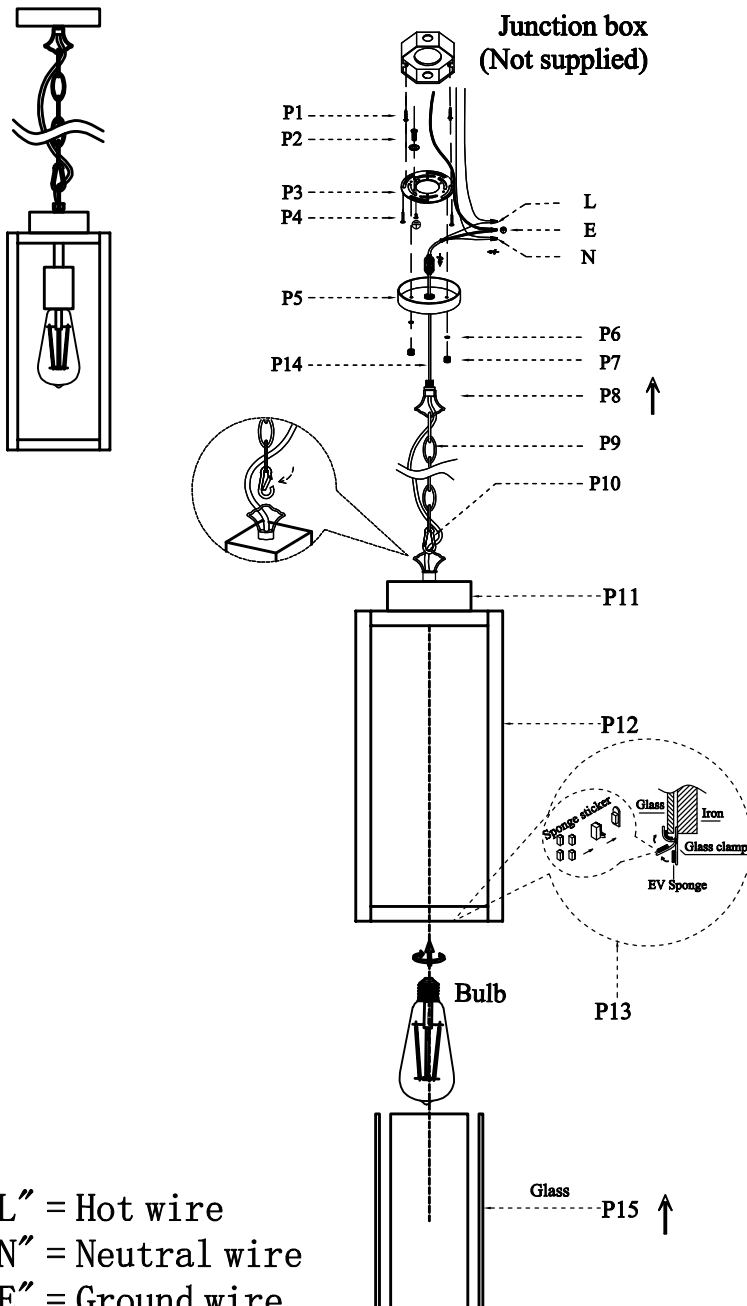

"L" = Hot wire  
"N" = Neutral wire  
"E" = Ground wire

Part Number	Part	Picture	Description	Qty
CP12H01BK	P1		Explosion screw	2
	P2		Screws M4	2
	P3		Mounting bracket Ø3.94	1
	P4		Screws M4	2
	P5		Canopy(Ø4.7"*0.78")	1
	P6		Rubber ring	2
	P7		Screw cap	2
Chain04PBK	P8		Hanging rings L1.57"*W0.59"*H1.57"	1
	P9		Chain (L39")	1
	P10		Hook (L1.57"*W0.78"*H0.15")	1
P-OD330H15BK-1	P11		85*85*30MM Box	1
	P12		149*149*315MM Body	1
	P13		EV Sponge Sponge sticker	12
Cord-59-18#-BK	P14		UL18#,L59"Black	1
GP12L9	P15		L136*H310MM Glass	4