



Collection:Frankford

Installation manual for:

OD334W18BK W10" H18" E11.5" L2

Installation instructions:

- 1.Install tube(P10)on lamp holder
- 2.Install E12*2 light source.(Bulbs not supplied) .
- 3.Put glass(P23)into Connect cover(P7) and stick sponge on clips(P9).Finally curve clips to fix glass.
- 4.Put glass(P24)into into body(P17) and stick sponge on clips(P16).Finally cruve clips to fix glass.
- 5.Connect cover(P7)with body(P17) and with screw(P18) to fixable.
- 6.Secure mounting bracket to the junction box
- 7.Black wire from ceiling(junction box) attaches to "L"wire from the fixture
- 8.White wire from ceiling(junction box) attaches to "N"wire from the fixture
- 9."E" wire from the ceiling attaches to "E" wire from the fixture.
- 10.Use rubber ring(P19)and screw(P20) to fixable lamp with wall mounted

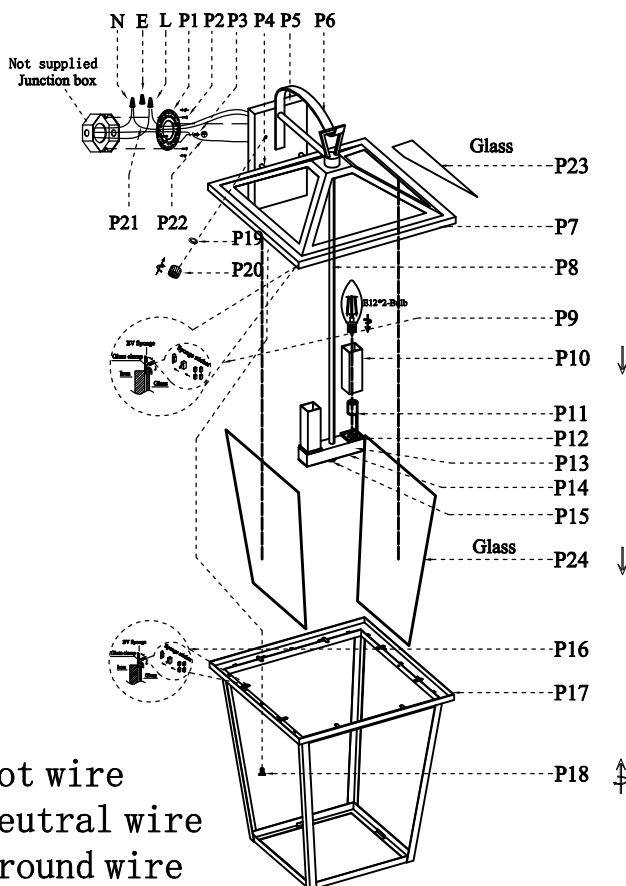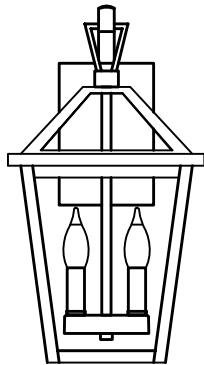

"L" = Hot wire
"N" = Neutral wire
"E" = Ground wire

Part Number	Part	Picture	Description	Qty
MB12W01	P1		Mounting bracket Ø3.94	1
	P2		Mounting bracket screw M4	2
	P3		Screw M4	1
P-OD334W18BK-1	P4		Ø8*20MM tube	2
	P5		180*120*H25MM Box	1
	P6		172*171*55 Hanging Ring	1
	P7		250*250*H100MM Cover	1
	P8		Ø11.5*290MM Tube	1
	P9		EV Sponge Sponge sticker	12
	P10		22*22*80MM Tube	2
	P11		E12 Holder	2
	P12		24*24*5MM Cover	2
	P13		107*28*23MM Lamp Holder	1
	P14		105*26MM Iron Plate	1
	P15		Ø15*H8MM Column parts	1
	P16		EV Sponge Sponge sticker	12
	P17		245*245*263MM Body	1
	P18		Screw M4	2
	P19		Rubber ring	2
	P20		Screw cap	2
	P21		UL18#Ground wire,L9.8"	1
	P22		UL18#,L12"Black+White	1
GP12L18	P23		205*113MM Glass	4
	P24		203*249MM Glass	4