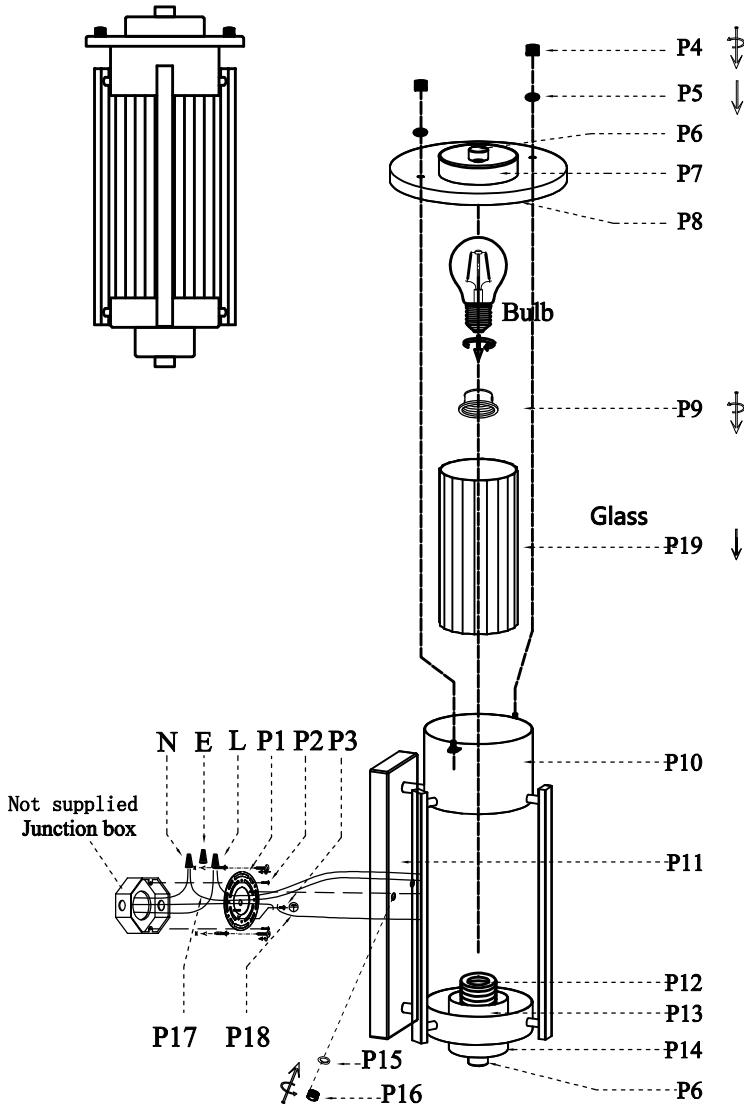


Collection: Bucknell
 Installation manual for:




















OD349W15BK W6.5" H14.5" E7" L1

Installation instructions:

1. Install glass (P19) to body(P10)
2. Use socket ring(P9) to lock in glass (P19)
3. Install E26 light source. (Bulbs not supplied)
4. Connect cover(P8) with body(P10) and put rubber ring(P5) and screw caps(P4) to fixable.
5. Secure mounting bracket (P1) to the junction box
6. Black wire from ceiling(junction box) attaches to "L" wire from the fixture
7. White wire from ceiling(junction box) attaches to "N" wire from the fixture
8. "E" wire from the ceiling attaches to "E" wire from the fixture.
9. Use rubber ring(P15) and screw cap(P16) fixable lamp into wall mounted



"L" = Hot wire
 "N" = Neutral wire
 "E" = Ground wire

| Part Number | Part | Picture | Description | Qty |
|----------------|------|---|---------------------------|-----|
| MB12W01 | P1 |  | Mounting bracket Ø3.94 | 1 |
| | P2 |  | Mounting bracket screw M4 | 2 |
| | P3 |  | Screw M4 | 1 |
| P-OD349W15BK-1 | P4 |  | Screw cap | 2 |
| | P5 |  | Rubber ring | 2 |
| | P6 |  | Ø20*12MM Column parts | 2 |
| | P7 |  | Ø80*20MM Cover | 1 |
| | P8 |  | Ø160*10MM Cover | 1 |
| | P9 |  | Socket ring | 1 |
| | P10 |  | 158*143*295MM Body | 1 |
| | P11 |  | 265*120*25MM Back bracket | 1 |
| | P12 |  | E26 Lamp Holder | 1 |
| | P13 |  | Ø60*25MM Column parts | 1 |
| | P14 |  | Ø60*30MM Column parts | 1 |
| | P15 |  | Rubber ring | 2 |
| | P16 |  | Screw cap | 2 |
| | P17 |  | UL18#Ground wire,L9.8" | 1 |
| | P18 |  | UL18#,L12"Black+White | 1 |
| GS12R7 | P19 |  | Ø100*230MM Glass | 1 |