


Collection:Clifford
Installation manual for:







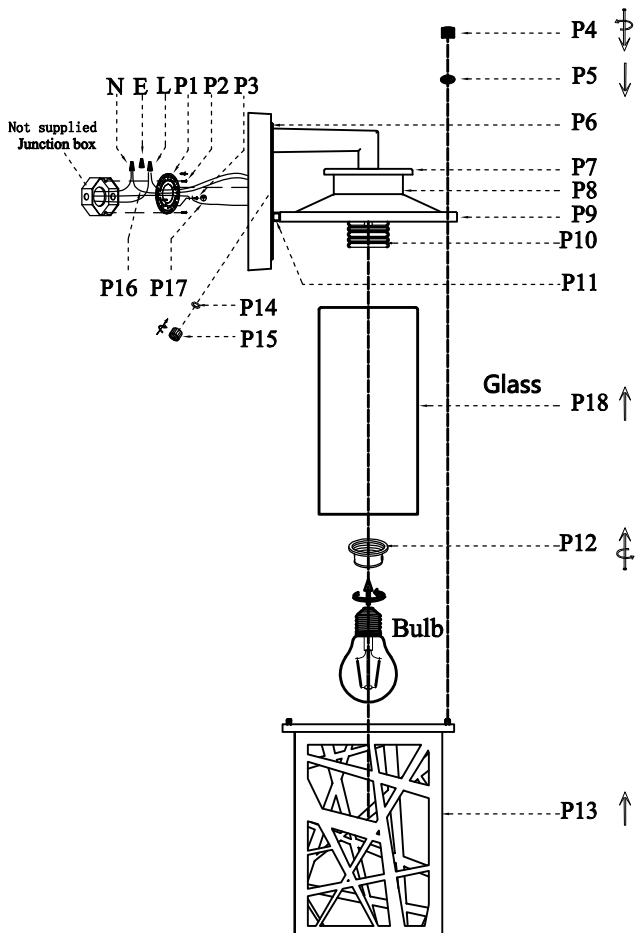











OD353W13BK W7" H13" E8" L1

Installation instructions:

1. Install E26 light source.(Bulbs not supplied) .
2. Install glass (P18) to cover(P9) .
3. Use socket ring(P12) to lock in glass(P14) .
4. Connect cover(P9)with body(P13) and put rubber ring(P5) with screw caps(P4) to fixable.
4. Secure mounting bracket (P1)to the junction box
5. Black wire from ceiling(junction box) attaches to "L"wire from the fixture
6. White wire from ceiling(junction box) attaches to "N"wire from the fixture
7. "E" wire from the ceiling attaches to "E" wire from the fixture.
8. Use rubber ring(P14) and screw cap(P15)fixable lamp into wall mounted



"L" = Hot wire
"N" = Neutral wire
"E" = Ground wire

| Part Number | Part | Picture | Description | Qty |
|----------------|---------|---|---|---------------------|
| MB12W01 | P1 |  | Mounting bracket Ø3.94 | 1 |
| | P2 |  | Mounting bracket screw M4 | 2 |
| | P3 |  | Screw M4 | 1 |
| P-OD353W13BK-1 | P4 |  | Screw cap | 2 |
| | P5 |  | Rubber ring | 2 |
| | P6 |  | 160*115*130MM Arm | 1 |
| | P7 |  | 90*90*6MM Cap | 1 |
| | P8 |  | 70*70*25MM Box | 1 |
| | P9 |  | 180*180*28MM Cover | 1 |
| | P10 |  | E26 Lamp Holder | 1 |
| | P11 |  | Ø8*7MM Tube | 1 |
| | P12 |  | Socket ring | 1 |
| | P13 |  | 174*174*218MM Body | 1 |
| | P14 |  | Rubber ring | 2 |
| | P15 |  | Screw cap | 2 |
| | P16 |  | UL18#Ground wire,L9.8" | 1 |
| | P17 |  | UL18#,L12"Black+White" | 1 |
| | GS12L21 | P18 |  | 100*100*210MM Glass |