


Collection:Lehigh  
 Installation manual for:







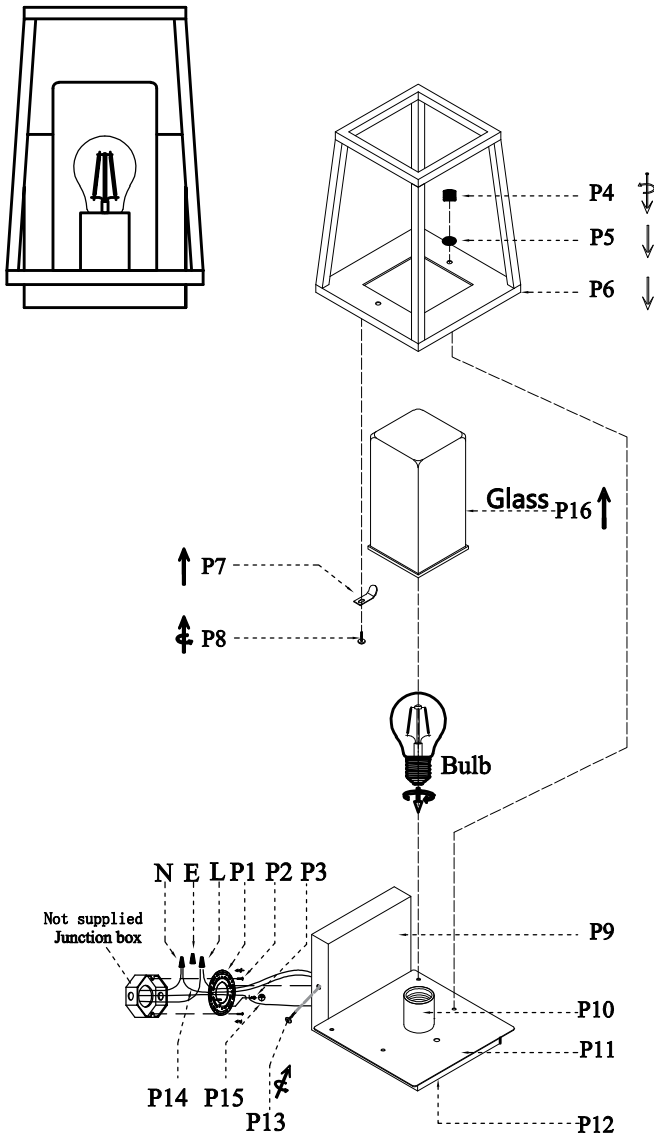









OD359W11BK W6"\* H10.5" E7.5" L1

**Installation instructions:**

- 1.Install E26 light source.(Bulbs not supplied) .
- 2.Install glass (P16) into lamp body(P6) and use clips(P7) with screw(P8) to fix glass.
- 3.Connect bottom(P11)with body(P6) and put rubber ring(P5) and screw caps(P4) to fixable.
- 4.Secure mounting bracket (P1)to the junction box
- 5.Black wire from ceiling(junction box) attaches to "L"wire from the fixture
- 6.White wire from ceiling(junction box) attaches to "N"wire from the fixture
- 7."E" wire from the ceiling attaches to "E" wire from the fixture.
8. Use screw(P13 ) to fiable lamp with wall mounted



"L" = Hot wire  
 "N" = Neutral wire  
 "E" = Ground wire

Part Number	Part	Picture	Description	Qty
MB12W01	P1		Mounting bracket Ø3.94	1
	P2		Mounting bracket screw M4	2
	P3		Screw M4	1
P-OD359W11BK-1	P4		Screw cap	2
	P5		Rubber ring	2
	P6		164*164*240MM Body	1
	P7		10*25MM Clips	4
	P8		Screw M4	4
	P9		140*140*25MM Back plate	1
	P10		E26 Lamp Holder	1
	P11		169*167*MM Bottom	1
	P12		150*140*20MM Box	1
	P13		Screw M4	2
	P14		UL18#Ground wire,L9.8"	1
	P15		UL18#,L12"Black+White	1
GS12L24	P16		110*110*190MM Glass	1