



Installation manual for
LD925D20 D20”H20” L4
Bulb Type : E12 bulb not included
Total Weight: 32 LBS

Installation instructions:


- 1.Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2.White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3."E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4.Attach the fixture to the ceiling.
- 5.Connect the metal tube(P9) to the lamp body assembly(P10) .
Connect the Canopy part to the fixture.
- 6.Attach the light body to the chain(P8) and lock it tightly.
- 7.Install the light source on the lamp body and turn on the light.
- 8.Thread metal pieces (P18)through metal rings and glass rods(A),
then twist with metal pieces(P17).

The end!

PARTS LIST

Part Number	Part	Picture	Description	Qty	Check list
Cord-10-18#-CL	P1		Power Cord 79" SPT-1 Clear	1	
	P2		L79"Ground electrode	1	
	P3		Crossbar 4" (Canopy part)	1	
	P4		Canopy lock (Canopy part)	1	
	P5		D4.7" Metal Canopy	1	
	P6		L59"CHAIN05P	1	
	P7		Canopy ring (Canopy part)	1	
	P8		loop	1	
	P9		L10.6"metal tube	1	
	P10		Metal nut	1	
	P11		D17.7"metal rack	1	
	P12		Metal Wire Box	1	
	P13		metal lamp cap	4	
	P14		E12 Socket	4	
	P15		Metal cover	1	
	P16		Cap nut	1	
	P17		Cap nut	52	
	P18		Ground Screw	52	
CR-925-RC-CL	A		L11"Clear glass rod	52	

Junction box

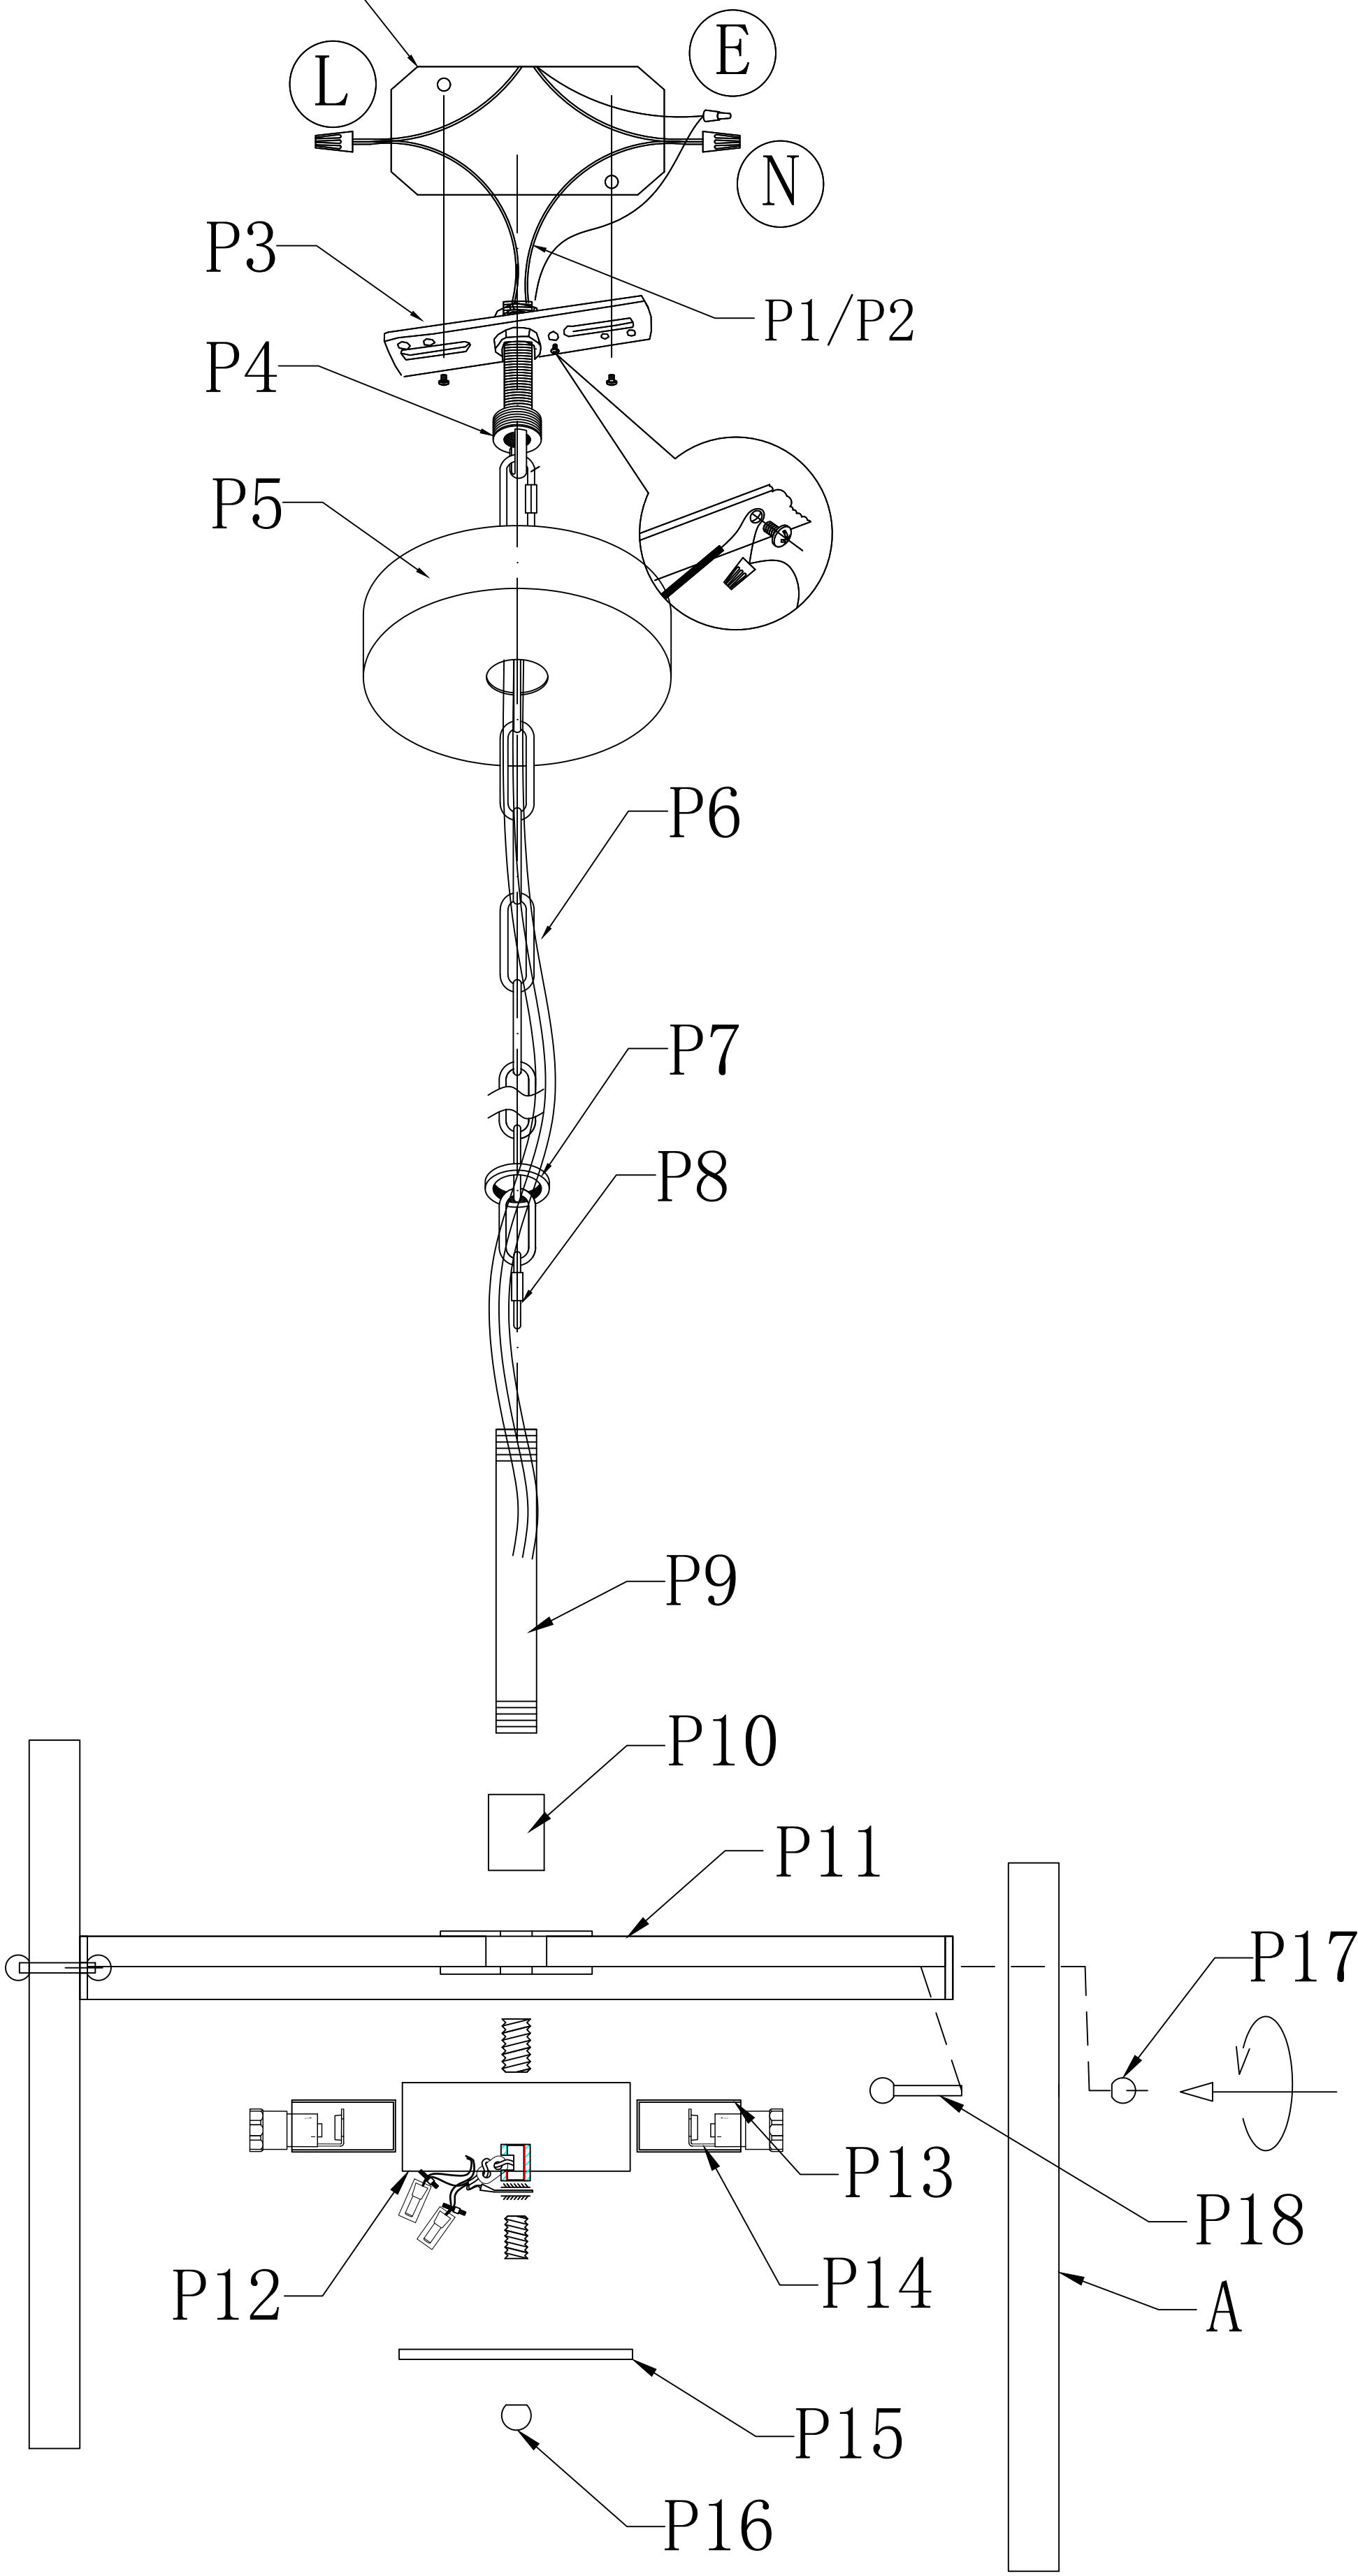

"L" = Hot wire
"N" = Neutral wire
"E" = Ground wire