




The pairing of glass and brilliant stainless steel, make it ideal for any kitchen and will blend perfectly with other appliances. Perimeter Aspiration technology helps to achieve Top Performance by delivering more powerful and efficient fume extraction, plus it reduces noise. Available in 30" & 36" widths, Lugano includes a powerful 600 CFM blower, LED lighting with dimmable feature and glass capacitive touch controls.



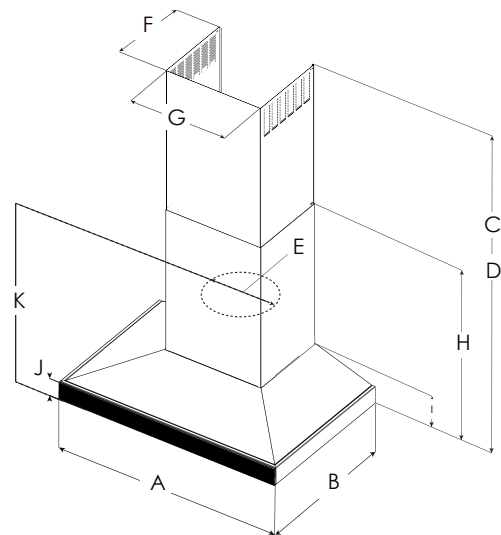


	ELG630S3	ELG636S3V
A	30" (76 cm)	36" (91.2 cm)
B	19 7/8" (50.5cm)	
C*	Min: 28 7/32" (71.8cm) Max: 42 1/4" (107.3cm)	
D**	Min: 24 3/5" (62.5cm) Max: 38 1/16" (98.3cm)	
E	6" (15.2cm)	
F	10 3/4" (26.8 cm)	
G	13" (33.1 cm)	
H	23 5/16" (60.8 cm)	
I	4 15/16" (12.6 cm)	
J	2 3/8" (6 cm)	
K	18 1/16" (47.2 cm)	

\* Ductless (recirculating) version  
\*\* Ducted version

## SPECIFICATIONS

Width:	30" Unit	36" Unit
Model:	ELG630S3	ELG636S3
Dimensions:	30" W x 19 7/8" D x 23 15/16" H	36" W x 19 7/8" D x 23 15/16" H
Blower Type(internal):**	600 CFM(3-speed + boost)	
Noise (sones):**	6.8 sones	
Finish:	Stainless Steel with black tempered glass	
Controls:	Capacitive Touch (Glass)	
Illumination:	2 Premium Dimmable LED lights, 2.1 W, 4000 K	
Grease Filter:	Dishwasher-Safe, Anodized Aluminum, Mesh Filter + Perimeter Aspiration (3 for 30" & 4 for 36")	
Duct Transition:	Round 6" Top Discharge	
Installation Type:	Ducted or Recirculating with Recirculating Kit (sold separately)	
Telescopic Chimney:	Can reach ceiling heights of min 7'0", max 9'2" (ducted out) & min 7'5", max 9'6" (recirculating).	
Electrical:	120V - 60 Hz, 450 W	120V - 60 Hz, 495 W
KITS:	Recirculating Kit: KIT0141925 (Contains 6" Deflector and 4 Flat Carbon Filters and Clips) Chimney Extension Kits: KIT02785 (Can reach 8'8" - 12'4"(ducted), 9'0" - 12'8"(recirculating) KIT01935 (Can reach 7'9" - 10'9"(ducted), 8'1" - 11'1"(recirculating) Charcoal Filter Kit: KIT0141918	
WARRANTY:***	Two (2) Years Parts & In-Home Labor. Earn an additional One (1) Year of Parts & In-Home Labor by registering on elica.com.	

## PLUS FEATURES

- 
**HUSH SYSTEM** - An exclusive sound deadening technology that effectively reduces sound levels up to 35%, compared to typical range hoods.
- 
**TOP PERFORMANCE** - Excellent performance for models equipped with this plus. High fume capturing capacity with an average aspiration range of 600 CFM's. with low noise levels, 1.2 - 1.7 sones at working speed.
- 
**LED LIGHT** - LED lighting is undoubtedly the smartest solution in terms of energy saving. Expected life is over 20,000 hours, and should last the full life of the hood.
- 
**CFM REDUCTION** - CFM Reduction System (CRS), is an exclusive feature to Elica hoods, which enables the user to reduce the maximum blower CFM, to meet local code requirements.
- 
**DIM-LIGHT** - The Dimmer allows you to adjust the brightness of the light as you wish. With Elica, lighting is customized in a discreet, personal and practical way, in order to contribute in creating the perfect kitchen atmosphere.
- 
**ELECTRONIC TOUCH CONTROLS** - Enjoy the modern design and convenience of multi-function electronic touch controls, which are discreetly hidden behind sleek black glass, and will illuminate a soft blue when activated.
- 
**PERIMETER ASPIRATION** - This technology draws air through a narrowed channel around a face plate, which increases suction, without increasing blower speed or energy consumption.



Certified Ratings	High Speed	Working Speed	Duct Size
CFM	400	170	6" (Vertical)
Sones	7	1.5	6" (Vertical)

\* The product images shown are for illustration purposes only and may not be an exact representation of the product.

\*\* Blower performance indicates the performance of the blower by itself. Performance claims are not AHAM certified but were established in accordance with HVI Standardized test procedure. For Certified Ratings, please refer to AHAM Certified Product Directory. Electric Ratings are declared according to UL.

\*\*\* For valid warranty extension, register within 3 months from purchase. For USA & Canada Users Only.