


Contemporary Lighting™

PRODUCT NAME: Half Moon 1LT Pendant
ITEM NUMBER: E20361

Please consult your electrician for hanging fixture and wiring.

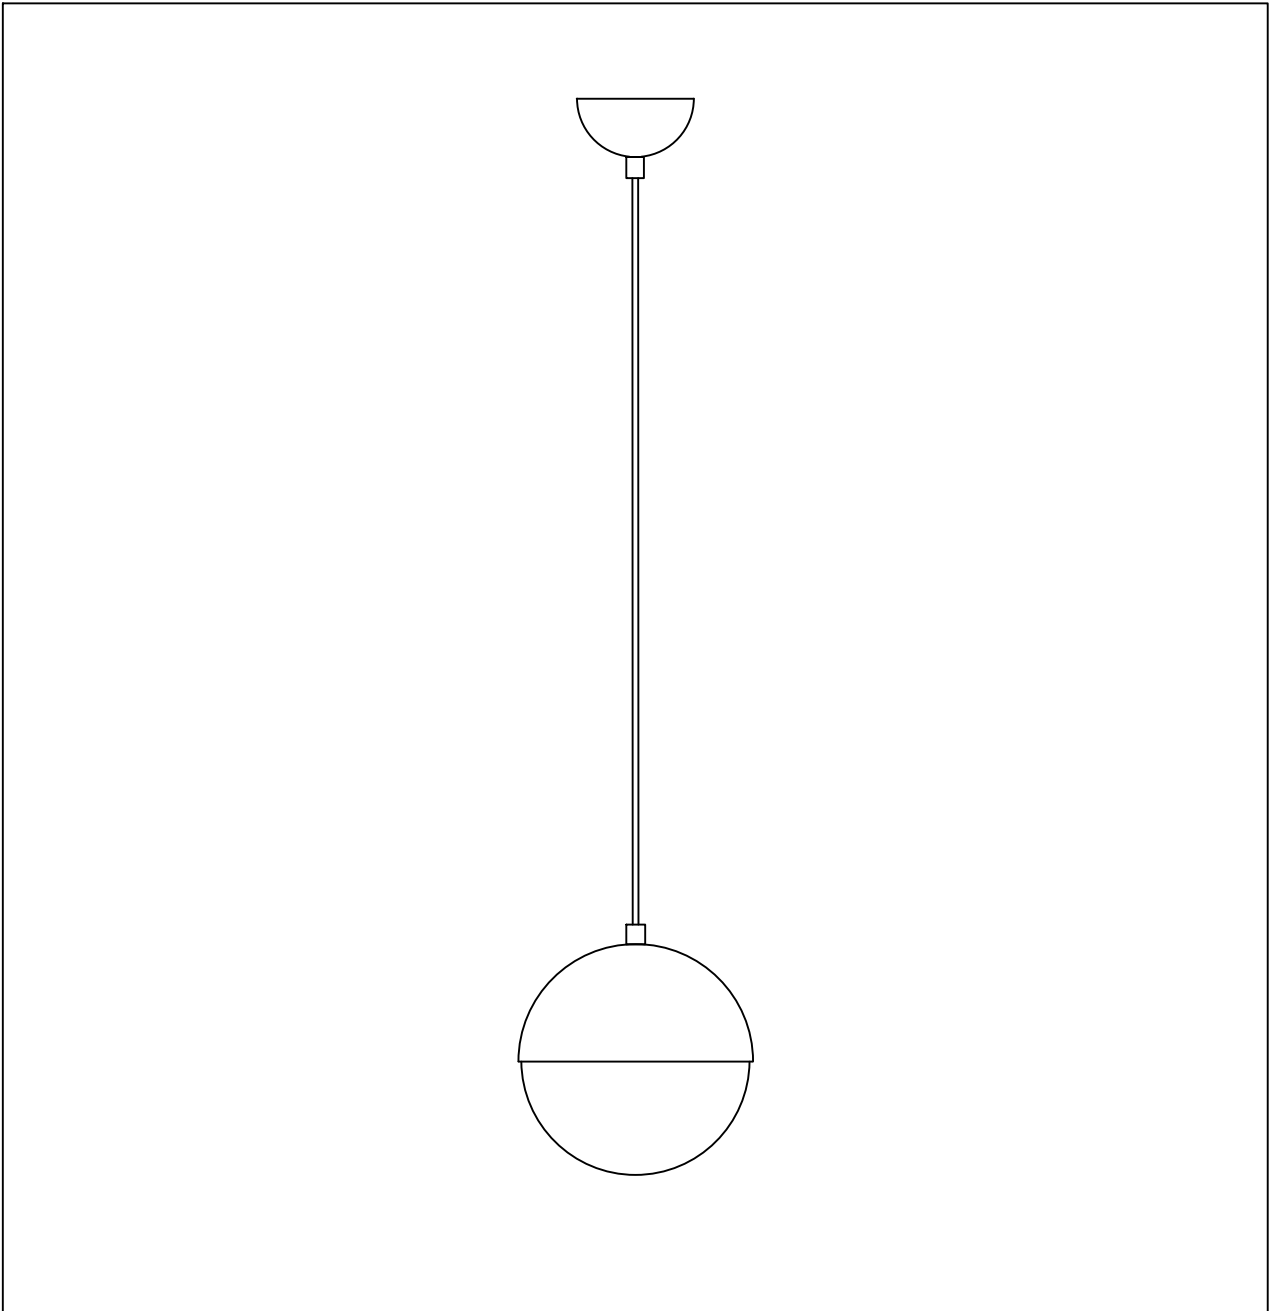

Bulb (Included): 1 * E26 * 9W


IMPORTANT: Turn off the power at the main fuse or circuit breaker box before starting installation



Bracket (A)



Screws(B)



Canopy(C)





Mounting Screws(D)




Plastic
Screws(E)

Locate all hardware & components before discarding packaging

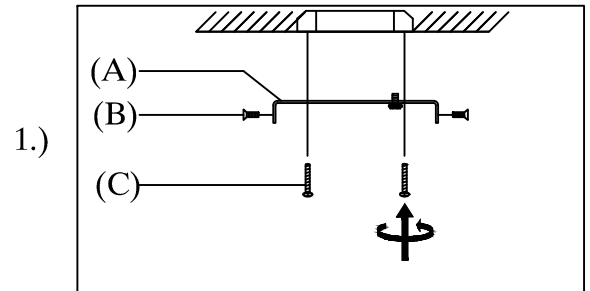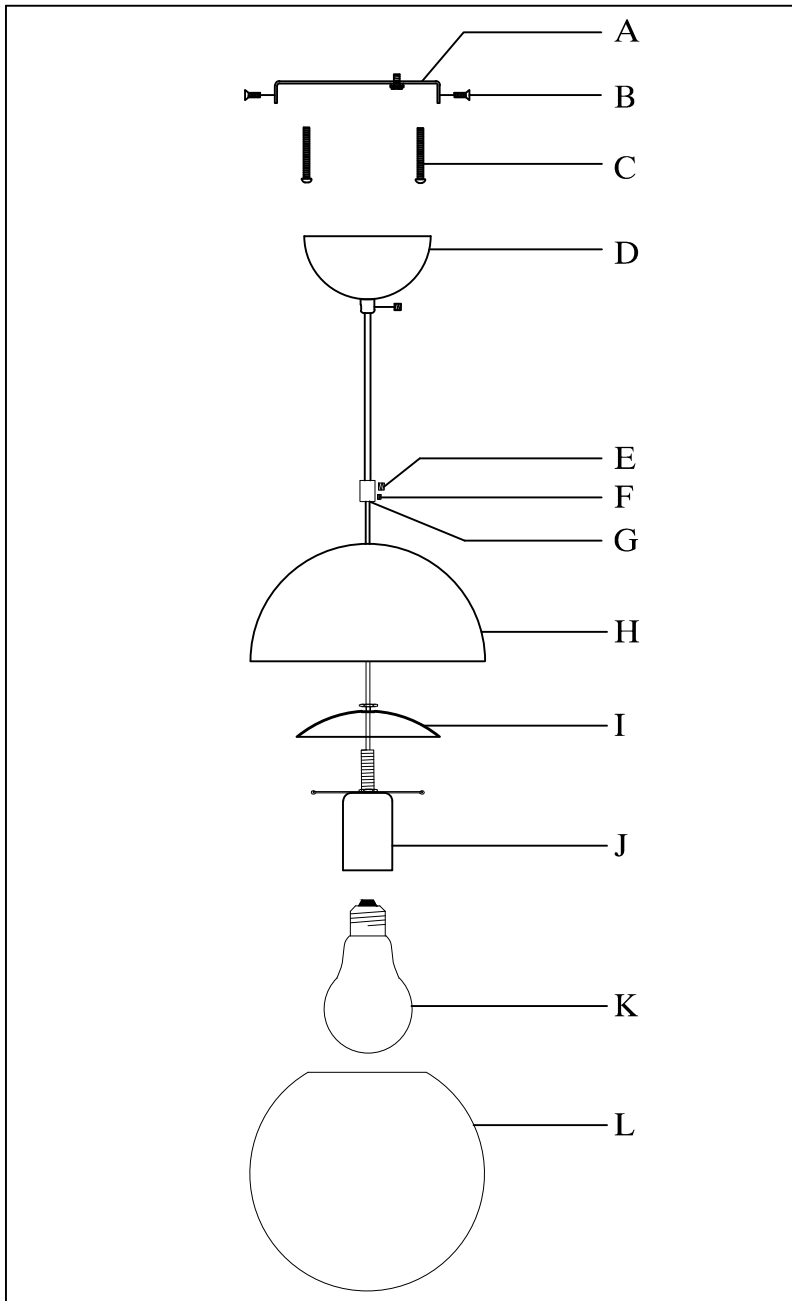


1.)

Step1 :Remove mounting bracket from fixture and install to electrical box.

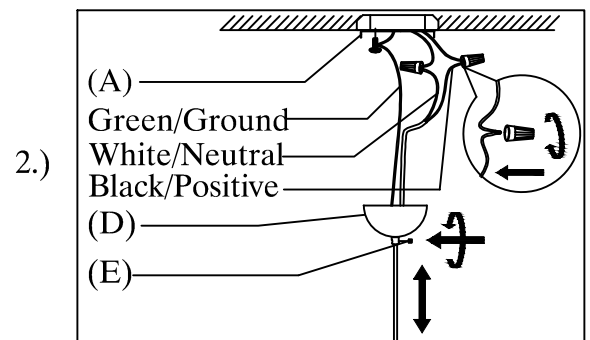

2.)

Step2 :Adjust wire length to desired mounting height, and tighten strain relief screws to secure. Wire fixture to wires in outlet box. Green wire is for Ground.

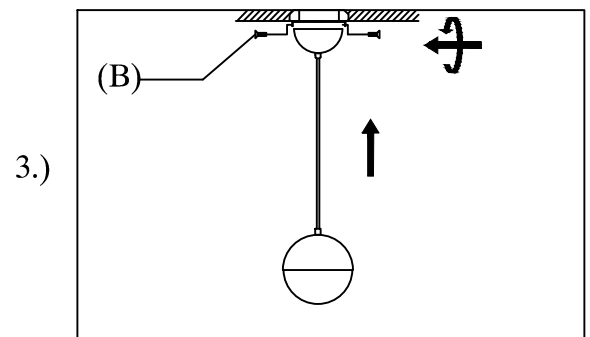


3.)



Step3 :Install fixture to bracket and tighten screws at the ends of the canopy to secure. Install bulb into socket.

Cleaning & Care:
Clean with soft cloth and a mild detergent.
Do not use abrasive cleaner.


IMPORTANT: Turn off the power at the main fuse or circuit breaker box before starting installation

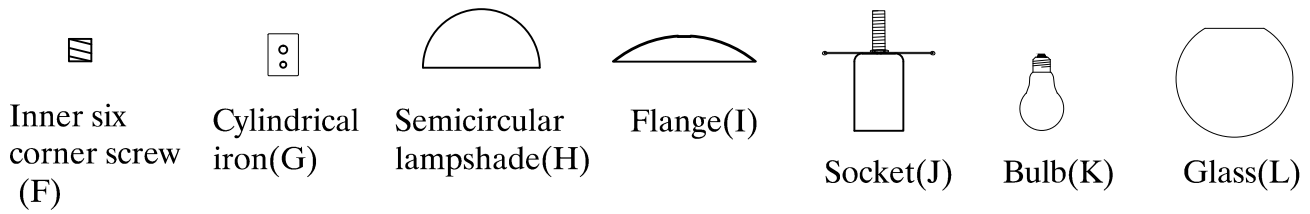


Replace glass and light bulbs - take down

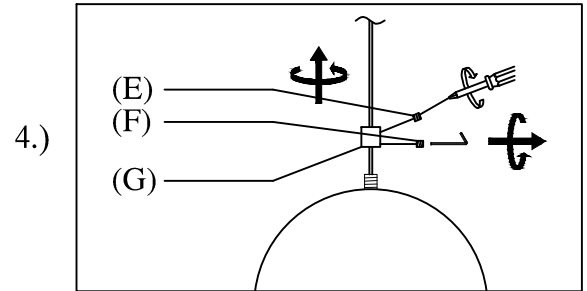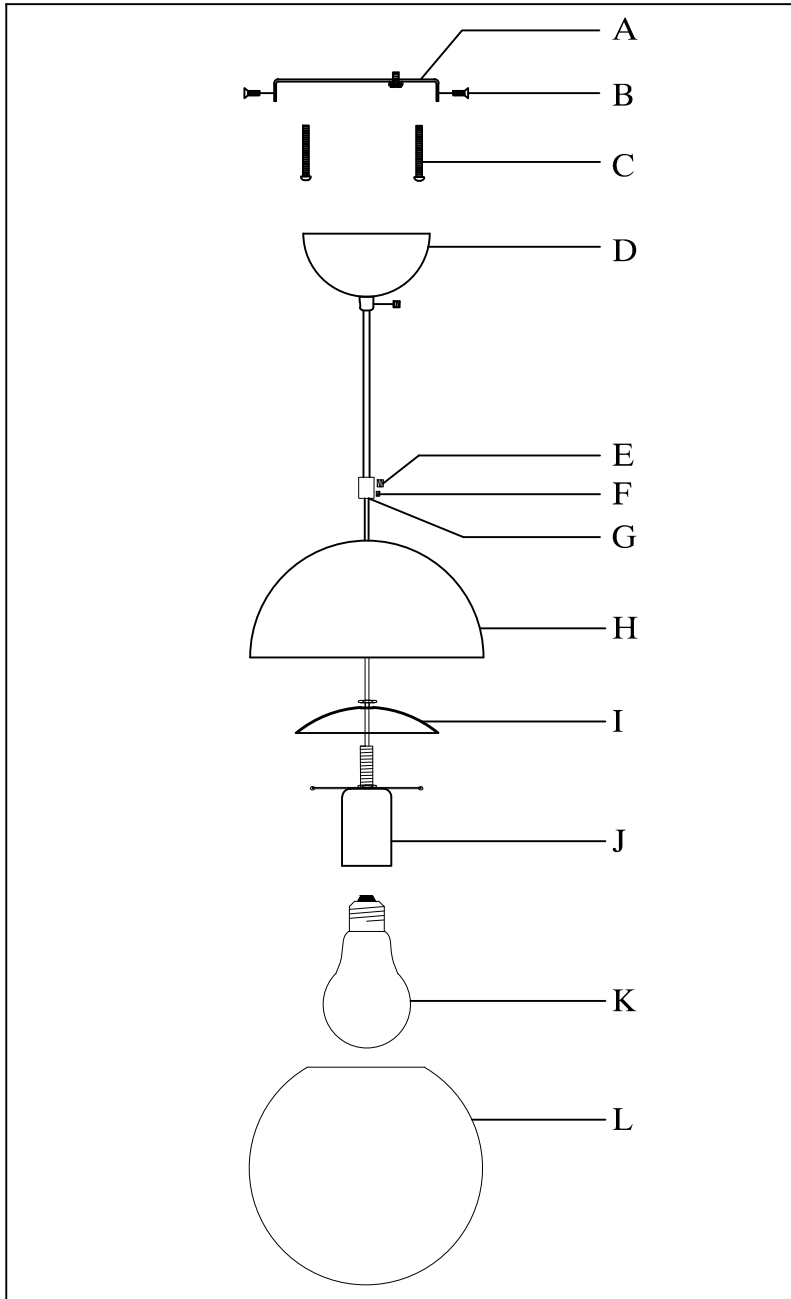

Step4 :Twist the plastic screws(E) with a screwdriver, use the six angle wrench to loosen the inner six corner screws(F), and twist the cylindrical iron parts.

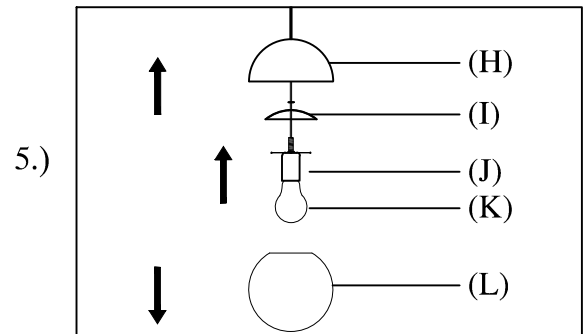


Step5 :Open the semicircle lampshade(H), twist the nut and take out the Flange(I) and the lamp socket(J) and Glass(L).

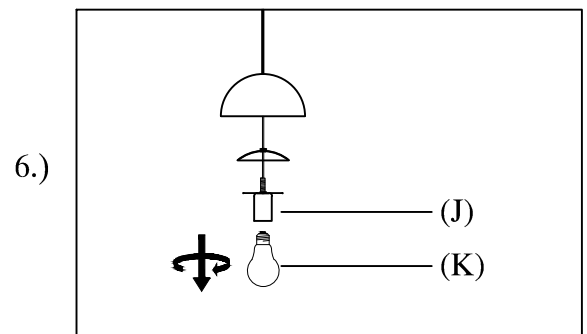



Step6 :Turn the bulb out of the socket.

Cleaning & Care:
Clean with soft cloth and a mild detergent.
Do not use abrasive cleaner.


IMPORTANT: Turn off the power at the main fuse or circuit breaker box before starting installation

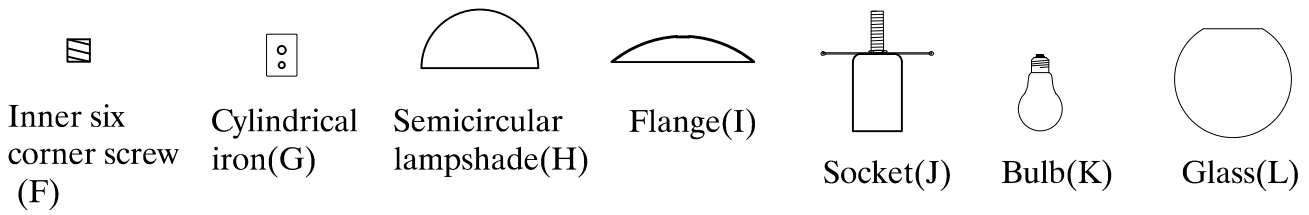


Replace glass and light bulbs - install

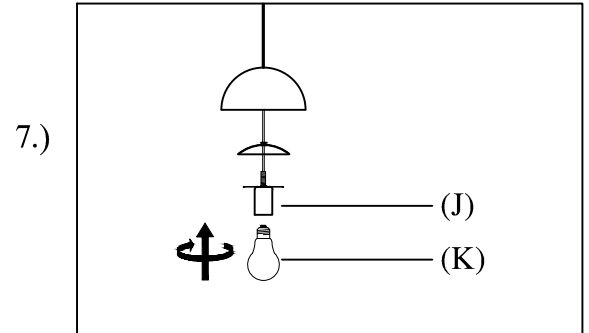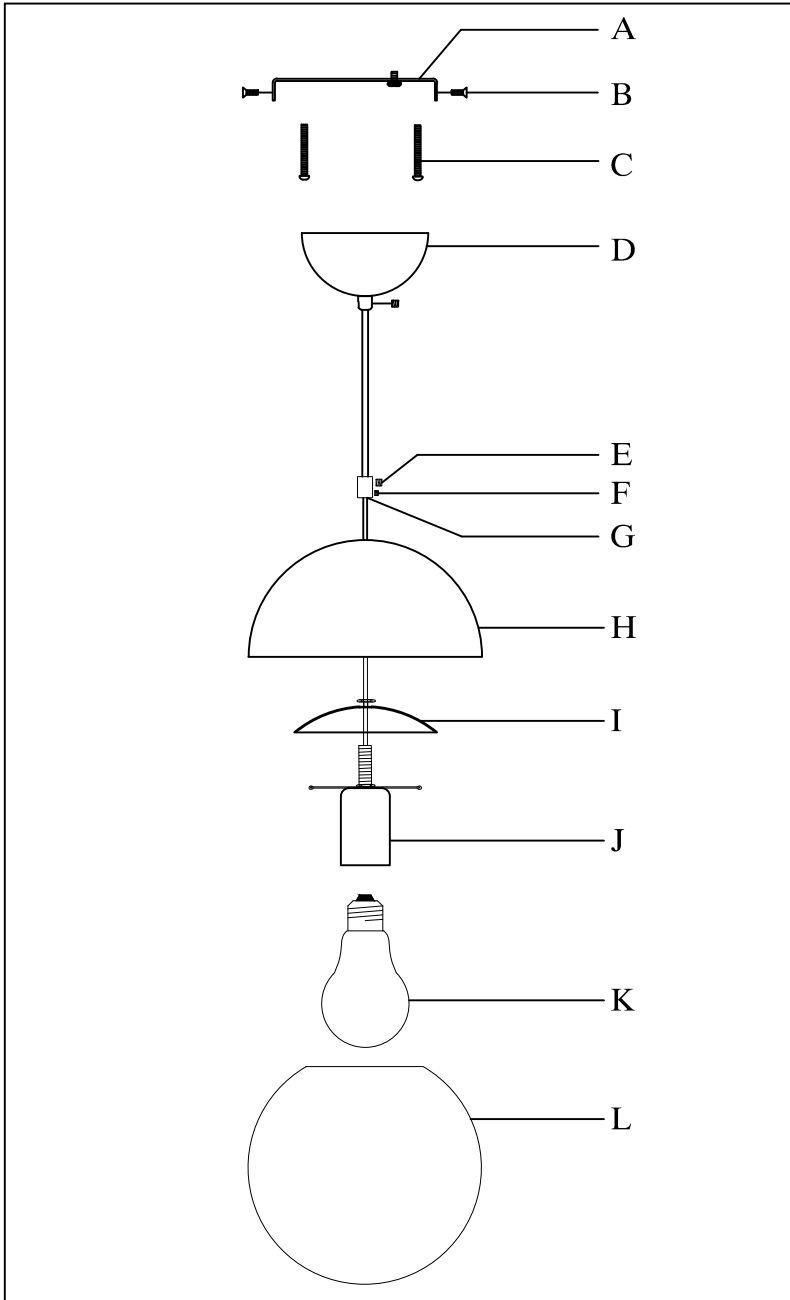

Step7 :Twist the new bulb(K) into the lamp socket(J).

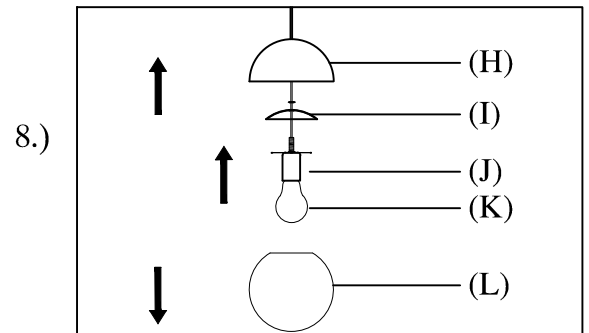

Step8 :Tilt the lamp socket(J) into the Glass(L). Place the Glass(L) flat, cover the Flange(I),tighten the nut and cover the upper Semicircular lampshade(H).

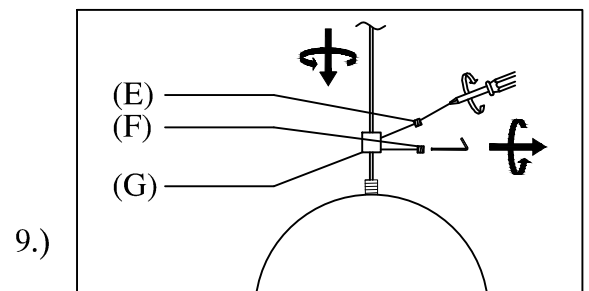

Step9 :To tighten cylindrical iron(G) parts, first lock the inner hexagonal screw(F) with an inner hexagonal wrench, and then lock the plastic screw(E) with a screwdriver.

Cleaning & Care:
Clean with soft cloth and a mild detergent.
Do not use abrasive cleaner.