



45362 HIGH OUTPUT SQUARE FIXED DOWNLIGHT



The Midway collection is a family of integrated led recessed lights available in sizes ranging from 2"-6". With their durable die cast aluminum bodies and built on CCT color selecting switch Midway family fixtures are aesthetically appealing, functional and extremely versatile. Their IC rated shallow bodies allow them to be used in most residential and commercial installations with or without insulation in the ceiling. Midway fixtures are available in white or black finish and come standard with a reliable phase dimming power supply.

TYPE:			
DATE:			
NOTES:			



2700K . 3000K . 3500K . 4000K . 5000K

SPECIFICATIONS

LIGHT HOUSING

- IC Airtight Cast aluminum body.
- Remodel application. C/W spring loaded clips.
- Mates to driver box with quick connector.
- Max Ceiling thickness 5/8".
- Approved for wet location.

DIMENSIONS

- Cut hole: ø2 7/8".
- Fixture: ø3 1/8" x 5 1/8"H.

ELECTRICAL

- 120 V Input class 2 constant current dimmable driver enclosed in junction box.
- TRIAC and ELV dimming.
- Min operating temperature (-4°F~104°F)(-20°C~-40°C).

LIGHT MODULE

- 1 x 15W Integrated LED COB.
- · Lumen maintenance 70% 50,000 hrs.
- CRI: 90+
- · Beam angle: 38 degree.
- 27K |30K |35K Kelvin (CCT):
- Delivered Lumen: 875 lm |932 lm |1027 lm |1068 lm |1041 lm

CERTIFICATIONS













140K

ORDERING GUIDE

MODEL	FINISH
45362-026	Black
45362-019	White

BEAM WATTS LUMENS KELVIN DIMMABLE CRI **ADJUSTABLE** ANGLE TRIAC/ELV 38° NO 2 7/8" 15W Up to 1068 **CCT Selectable** 90+










019- White

PRODUCT DIMENSIONS

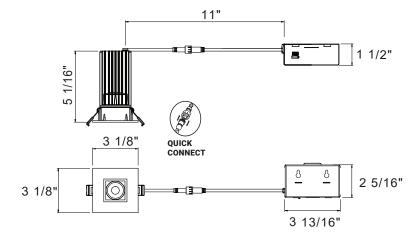

ACCESSORIES



45612-012 60" 3 pin Connector



45563-016 **NEW CONSTRUCTION SMASH PLATE** 13 1/4" x 6 1/2" ø2 3/4"



NO IC BOX REQUIRED