

# Inca Pro Plus Range Hood

versatile pro liner and hood



All in one Professional Liner from Faber. Available in three widths and two depths depending on your needs. With the flexibility of four blower options, the Inca Pro Plus offers the power, style and functionality you need for today's custom pro hood applications.

| Model #              | Size   Color             | Performance Range | Sound Levels     |
|----------------------|--------------------------|-------------------|------------------|
| <b>PICK A SIZE</b>   |                          |                   |                  |
| INPL3619SS           | 36" W X 19" D            |                   |                  |
| INPL4219SS           | 42" W X 19" D            |                   |                  |
| INPL4819SS           | 48" W X 19" D            |                   |                  |
| INPL3622SS           | 36" W X 22" D            |                   |                  |
| INPL4822SS           | 48" W X 22" D            |                   |                  |
| <b>PICK A BLOWER</b> |                          |                   |                  |
| IB300                | Internal Blower 300 cfm  | 60 - 300 cfm      | 1.0 - 4.0 sones  |
| IB600                | Internal Blower 600 cfm  | 60 - 600 cfm      | 1.0 - 6.5 sones  |
| IB1200               | Internal Blower 1200 cfm | 120 - 1,200 cfm   | 2.0 - 12.0 sones |
| RB900                | Remote Blower 900 cfm    | 120 - 900 cfm     |                  |
| RB1200               | Remote Blower 1200 cfm   | 120 - 1,200 cfm   |                  |



## Feature Chart

|                                                  |                                                                 |
|--------------------------------------------------|-----------------------------------------------------------------|
| Cabinet Cut Out                                  | 34 3/4", 40 3/4", 46 3/4" (W) X 19 3/4" OR 22 3/4" (D)          |
| Convertible to Recirculating                     | Yes - charcoal filter needed, need air return back into kitchen |
| Controls                                         | Variable Speed Dial                                             |
| Lighting                                         | 2 X 45 (W) Halogen with Dimmer                                  |
| Ducting Top                                      | 6" Round OR 10" Round                                           |
| Grease Filters                                   | dishwasher safe SS baffle                                       |
| AC Input                                         | 120 V - 60 hz                                                   |
| AC Power (IB300, IB600, IB1200, 900 RB, 1200 RB) | 2.7, 3.6, 6.2, 1.9, 2.6 A at 310, 420, 730, 220, 300 W          |
| <b>Annual Electricity Costs</b>                  | <b>\$5.22 / Year * (600 cfm)</b>                                |


\* Note – ran 30 minutes a day on low speed, 365 days, using the North American average of 12.2 cents per kWh.

p.o. box 435 • Wayland, MA 01778 • tel: (508) 358-5353 • fax: (508) 358-5730 • e-mail: info@faberonline.com • www.faberonline.com


## Dimensional Diagrams

(see installation instructions for more information)


### OVERALL

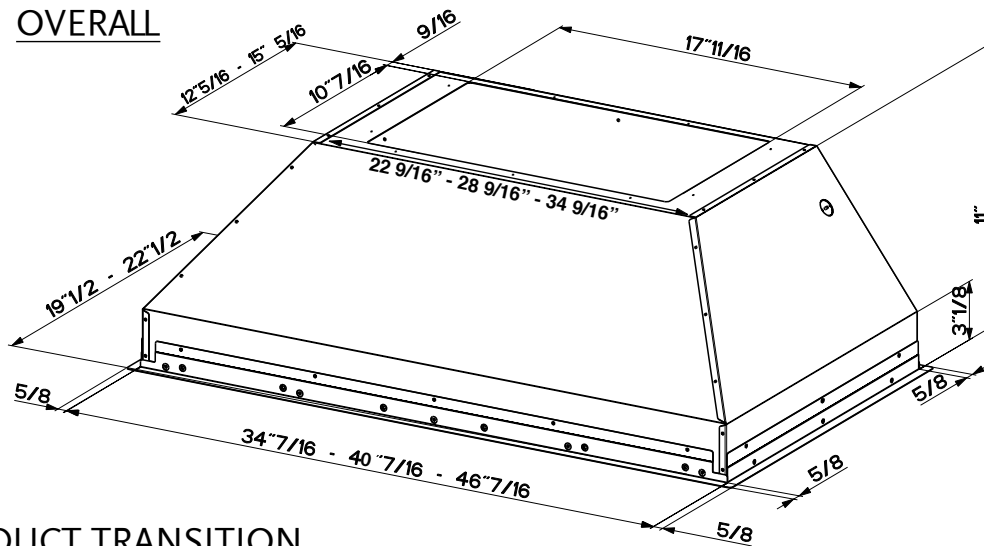

### DUCT TRANSITION

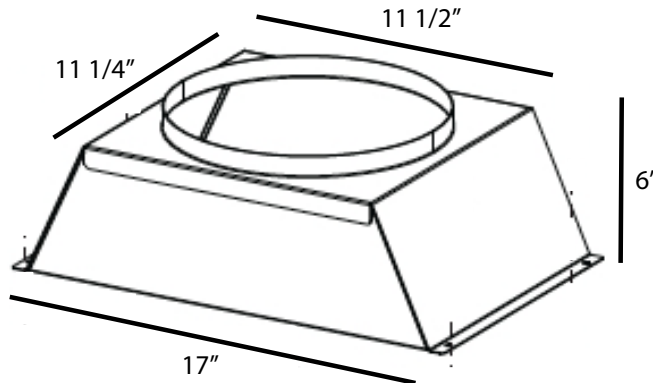

### SIDE

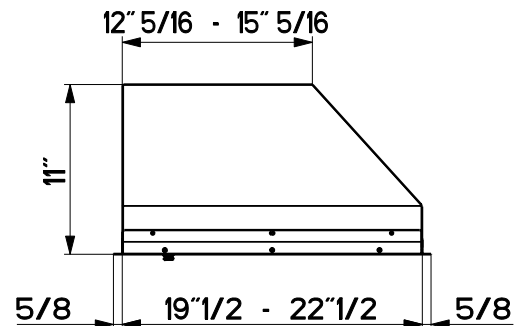

## ACCESSORIES

### Charcoal Filters

# FILTER1


For recirculating installations, high quality, heavy duty filters ensure the removal of smoke and odors from the kitchen. Some ductwork is required to exhaust the unit out of the cabinet.



### 10" In-line blower Kit

#INLBKIT

Use to connect a separately purchased in-line blower or previously installed remote blower to the range hood. Includes a duct plate with a 10" round duct collar and a built in wiring box



### Universal Make-Up Air Damper

Satisfies current make-up air requirements, this kit uses an air switch above the hood to activate the make-up air damper to open and bring fresh air into the home whenever the hood fan is operating and then close tightly when the hood is off. The CFM level is not reduced by using this kit.

# MUDAMPER6 / MUDAMPER8 / MUDAMPER10  
(6") (8") (10")



**WARNING!** Product specifications are subject to change without notification. Consult the installation instructions before you begin installing this rangehood.