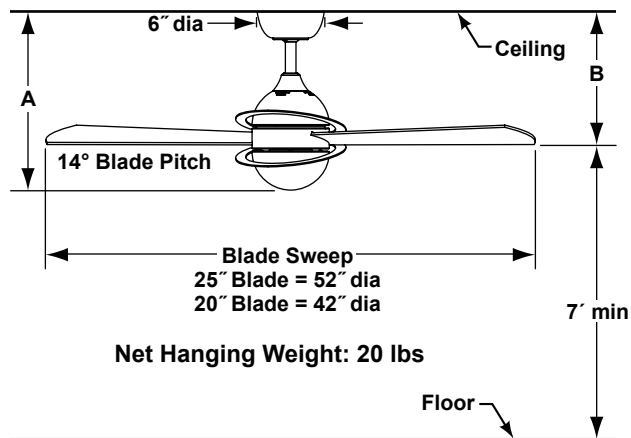
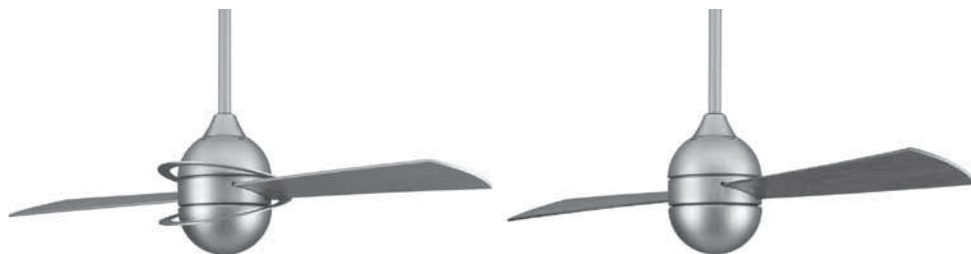


**INVOLUTION™****FP4520\*\*  
Ceiling Fan**

	A	B
Fan w/6" downrod	17.00"	13.00"
Fan w/12" downrod	23.00"	19.00"
Fan w/18" downrod	29.00"	25.00"
Fan w/24" downrod	35.00"	31.00"
Fan w/36" downrod	47.00"	43.00"
Fan w/48" downrod	59.00"	55.00"
Fan w/60" downrod	71.00"	67.00"
Fan w/72" downrod	83.00"	79.00"

**Available Finish**

OB	Oil-rubbed bronze
SN	Satin nickel

**INSTALLATION REQUIREMENTS:**

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

**ELECTRICAL REQUIREMENTS:**

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

**MOTOR SPECS:**

153 x 18 motor is designed for optimal performance with this fan.

**BLADES:**

A set of two 25" reversible cherry/walnut wood blades is included. Optional sets of two 20" wood blades are available in reversible cherry/walnut (B4542CWR) and satin nickel (B4542SN) finishes—sold separately. Optional sets of two 25" wood blades are available in satin nickel (B4500SN) finish—sold separately. Optional sets of two 20" composite blades are available in cherry (BPW4542CY) and walnut (BPW4542WA) finishes—sold separately.

**CONTROL OPTIONS:**

CW40 4-speed, fan-only, wall control is included. Reversing switch located inside lower fan housing. Optional CW1SW, CW2, CW5 and CWRL4 wall controls and CRL4WH and CRL8TS remote controls with receiver unit are available—sold separately. Instructions are provided with each control.

**LIGHTING OPTION – LK4520\*\*:**

A single-bulb downlight fixture with 75-watt halogen minican bulb included is available—sold separately. Maximum downlight wattage not to exceed 75 watts. **NOTE:** Fan is supplied with fan-only wall control; light kit will require the use of a CW1SW, CW2, CW5 and CWRL4 wall control or CRL4WH and CRL8TS remote control—sold separately.

**DOWNROD OPTIONS:**

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods available in 12", 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for up to 52°. Optional close-to-ceiling kit is available as well—sold separately. Call technical support for more information.

**LOCATION USE:**

Fan is rated for dry locations only. Damp location rated if used with all-weather composite blades listed above.

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	132	3889	108	0.30	36
H-Med	115	3386	121	0.26	28
L-Med	98	2784	139	0.22	20
Low	69	1894	189	0.16	10