


KEISTONE™

FPD8089 -NL
72" Ceiling Fan**

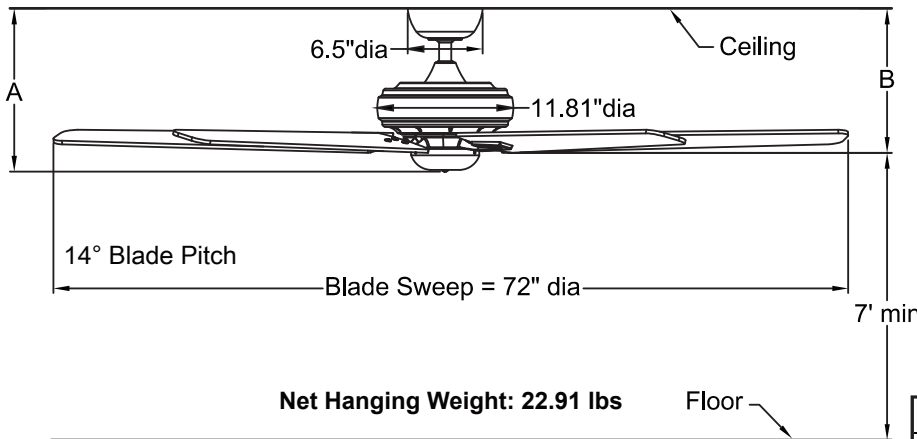

	A	B
Fan w/4.5" downrod	14.18"	12.60"
Fan w/12" downrod	21.68"	20.10"
Fan w/18" downrod	27.68"	26.10"
Fan w/24" downrod	33.68"	32.10"
Fan w/36" downrod	45.68"	44.10"
Fan w/48" downrod	57.68"	56.10"
Fan w/60" downrod	69.68"	68.10"
Fan w/72" downrod	81.68"	80.10"

Available Finishes

Fan / Housing Assembly		Blades - Traditional
BA	Bronze Accent	Cherry / Walnut
PW	Pewter	Cherry / Walnut

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

DC-165M DC motor is designed for optimal performance with this fan.

BLADES:

A set of five 31" reversible traditional wood blades is included.

CONTROL OPTIONS:

TR34WH hand-held DC fan remote control is included. Push button remote control has 6 fan speeds, reverse and off button.

DOWNROD OPTIONS:

Fan comes with 1" dia. x 4.5" long downrod (DR1-45). Optional downrods available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling upto 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 30° and up to 52°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry locations only.

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
I	52	4483	924	0.13	4.9
II	63	5382	691	0.17	7.8
III	74	6411	583	0.23	11.0
IV	85	7213	454	0.30	15.9
V	97	8055	374	0.38	21.6
VI	108	8895	304	0.47	29.3