




EMBRACE 44™

FPS7981B** Ceiling Fan

Ceiling Bracket

Width of the screw slot

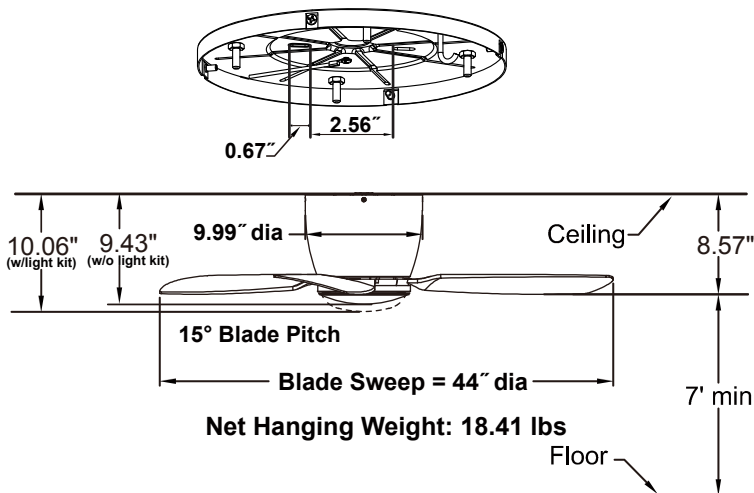

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

153 x 15 motor is designed for optimal performance with this fan.

BLADE SET:

A set of three 19" composite blades is included.

CONTROL OPTIONS:

TR500 hand-held remote control is included. Push button remote control with variable fan speeds, infinite light levels and off button. Optional CWRL4**, WC2WH and WR501WH wall controls, BTCR9, CRL4WH hand held remote controls and BTR9 and WFR50 receiver are available —sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

One 18-watt LED included.

LOCATION USE:

Fan is rated for dry location only.

Available Finishes

BN	Brushed Nickel with Brushed Nickel blades and Opal Frosted Glass / Steel Cap
DZ	Dark Brone with Dark Brone blades and Opal Frosted Glass / Steel Cap
GR	Matte Greige with Matte Greige blades and Opal Frosted Glass / Steel Cap
MW	Matte White with Matte White blades and Opal Frosted Glass / Steel Cap

Fan Airflow / Energy Efficiency Info (120V)

Fan Spee	Max RPM	CFM	CFM / Watts	Amps	Watts
High	180	3855	87	0.37	45
Med	130	2842	126	0.26	23
Low	80	1718	174	0.16	10

Light Bulb Information (120V)

Bulb Socket	Bulb Type	Watts	Lumens Amount	Color Temp	CRI
18W	LED	18	1400	3000	90%