


TORTO™

**FP7902BN
Ceiling Fan**

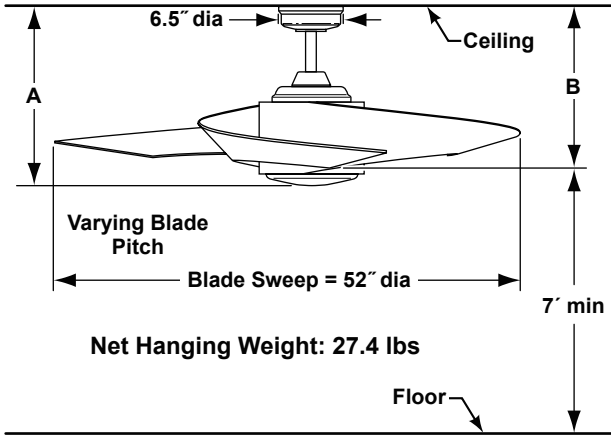

	A	B
Fan w/6" downrod	16.50"	15.00"
Fan w/12" downrod	22.50"	21.00"
Fan w/18" downrod	28.50"	27.00"
Fan w/24" downrod	34.50"	33.00"
Fan w/36" downrod	46.50"	45.00"
Fan w/48" downrod	58.50"	57.00"
Fan w/60" downrod	70.50"	69.00"
Fan w/72" downrod	82.50"	81.00"

Available Finish	
BN	Brushed Nickel with Brushed Nickel Blades and Opal Frosted Glass

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

172 x 20 motor is designed for optimal performance with this fan.

BLADE SET:

A set of three composite blades is included.

CONTROL OPTIONS:

BTT9R bluetooth hand-held remote control with wall mount is included. Push button remote control has 3 fan speeds, infinite light levels, reverse and off button.

LIGHTING OPTIONS:

One 18-watt LED included.

DOWNROD OPTIONS:

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods available in 12", 18", 24", 36", 48", 60" and 72" lengths. Fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional close-to-ceiling kit is available as well—sold separately. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 30° and up to 52°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry and damp locations.

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	96	4425	80	0.47	56
Med	67	2849	108	0.39	26
Low	47	2057	141	0.31	15

Light Bulb Information (120V)				
Bulb Type	Watts	Lumens Amount	Color Temp	CRI
LED	18	1300	3000	80%