
# **LEVON™ DC**

# FPD7916\*\* Ceiling Fan



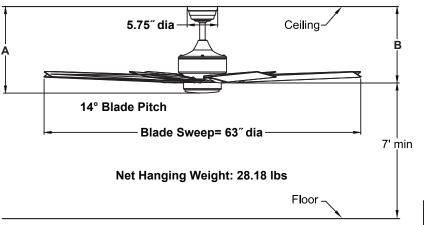

	Α	В
Fan w/6" downrod	16.27"	14.40″
Fan w/12" downrod	22.27"	20.40"
Fan w/18" downrod	28.27"	26.40"
Fan w/24" downrod	34.27"	32.40"
Fan w/36" downrod	46.27"	44.40"
Fan w/48" downrod	58.27"	56.40"
Fan w/60" downrod	70.27"	68.40″
Fan w/72" downrod	82.27"	80.40"

Available Finish					
BN	Brushed Nickel with Brushed Nickel Blade				
DZ	Dark Bronze with Dark Walnut Blade				

Airflow / Energy Efficiency Info (120V)

Energy Star test with BPW7912 Blade

**CFM** 

3083

CFM / Watts

1101

Amps

0.05

Watts

Max RPM

51

Fan Speed

## **INSTALLATION REQUIREMENTS:**

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

# **ELECTRICAL REQUIREMENTS:**

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

### **MOTOR SPECS:**

DC-165M DC motor is designed for optimal performance with this fan.

# **BLADES:**

A set of eight 27" composite blades is included.

# **CONTROL OPTIONS:**

TR39 hand-held DC fan remote control is included. Push botton remote control has 6 fan speeds, infinite light levels, reverse and off button.

VI	134	7817	230	0.42	34
IV V	103 120	5953 6857	425 298	0.19	14 23
Ш	86	5040	586	0.13	9
II	68	3920	817	0.08	5

Light Bulb Information (120V)							
Bulb Type	Watts	Lumens Amount	Color Temp	CRI			
LED	18	1350	3000	80%			

### LIGHTING OPTIONS:

One 18-watt dimmable LED included.

# **DOWNROD OPTIONS:**

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". The fan can be mounted on a sloped ceiling up to 27°. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Call technical support for more information.

# **LOCATION USE:**

Fan is rated for dry and damp locations.