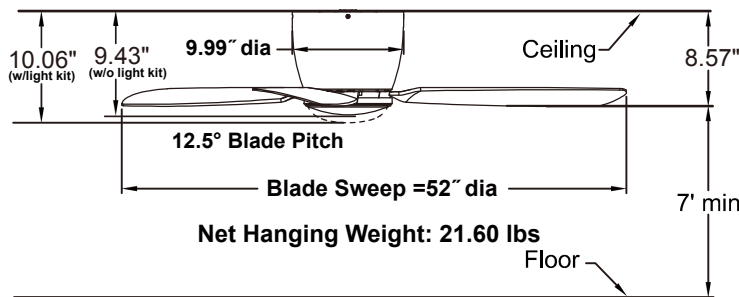



**EMBRACE™****FPS7955B\*\*  
Ceiling Fan****Ceiling Bracket**

Width of the screw slot

**INSTALLATION REQUIREMENTS:**

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

**ELECTRICAL REQUIREMENTS:**

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

**MOTOR SPECS:**

172 x 17 motor is designed for optimal performance with this fan.

**BLADE SET:**

A set of three 23" composite blades is included.

**CONTROL OPTIONS:**

TR500 hand-held remote control is included. Push button remote control with variable fan speeds, infinite light levels and off button. Optional CWRL4\*\*, WC2WH and WR501WH wall controls, BTCR9, CRL4WH hand held remote controls and BTR9 and WFR50 receiver are available —sold separately. Instructions are provided with each control.

**LIGHTING OPTIONS:**

One 18-watt LED included.

**LOCATION USE:**

Fan is rated for dry location only.

**Available Finishes**

BN	Brushed Nickel with Brushed Nickel blades and Opal Frosted Glass / Steel Cap
DZ	Dark Bronze with Dark Bronze blades and Opal Frosted Glass / Steel Cap
GR	Matte Greige with Matte Greige blades and Opal Frosted Glass / Steel Cap
MW	Matte White with Matte White blades and Opal Frosted Glass / Steel Cap

**52" Fan Airflow / Energy Efficiency Info (120V)**

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	174	4741	101	0.39	47
Med	117	3472	125	0.30	28
Low	89	1770	157	0.18	11

**Energy Guide FTC**

Power (W <sub>ave</sub> )	Total Air Delivery (CFM <sub>ave</sub> )	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
33	3348	9	102

**Light Bulb Information (120V)**

Bulb Socket	Bulb Type	Watts	Lumens Amount	Color Temp	CRI
18W	LED	18	1400	3000	90%