




SLINGER II™

LP8147SLBN 72" Ceiling Fan Lowes Item #581598

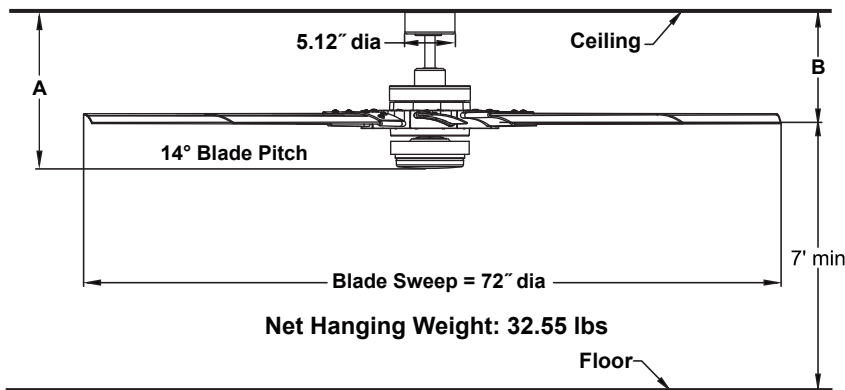

	A	B
Fan w/ 6" downrod	15.65"	11.52"
Fan w/12" downrod	21.65"	17.52"
Fan w/18" downrod	27.65"	23.52"
Fan w/24" downrod	33.65"	29.52"
Fan w/36" downrod	45.65"	41.52"
Fan w/48" downrod	57.65"	53.52"
Fan w/60" downrod	69.65"	65.52"
Fan w/72" downrod	81.65"	77.52"

Available Finishes

BN	Brushed Nickel with Gray Blade and Opal Frosted Glass / Steel Cap
----	---

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

DC165NM sensorless DC motor is designed for optimal performance with this fan. Fan is Energy Star Rated.

BLADES:

A set of nine 29" plastic blades is included.

CONTROL OPTIONS:

TR29S hand-held DC fan remote control is included. Push button remote control has 6 fan speeds, fan off, infinite light levels and reverse button.

LIGHTING OPTIONS:

One 18-watt LED included.

DOWNROD OPTIONS:

Fan comes with a 1" Dia. x 6" downrod (DRT1-6). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72". For installations requiring a longer downrod, a downrod coupler is available. Fan must use 18" or longer downrod, and can be mounted on a sloped ceiling up to 19°. Optional sloped ceiling kits (SCK1-52) are available for up to 42°. Call technical support for more information.

LOCATION USE:

Fan is rated for damp locations.

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
I	32	3155	1502	0.04	2
II	43	4520	1076	0.07	4
III	55	5921	740	0.12	8
IV	67	7558	532	0.20	14
V	79	8947	373	0.32	24
VI	87	10032	285	0.44	35

Energy Guide FTC

Power (Watt)	Total Air Delivery (CFMave)	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
19	5398	5	279

Light Bulb Information (120V)

Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
LED	18	1	1440	3000	80%