




GLIDEAIRE™

FPD8520
52" Ceiling Fan**

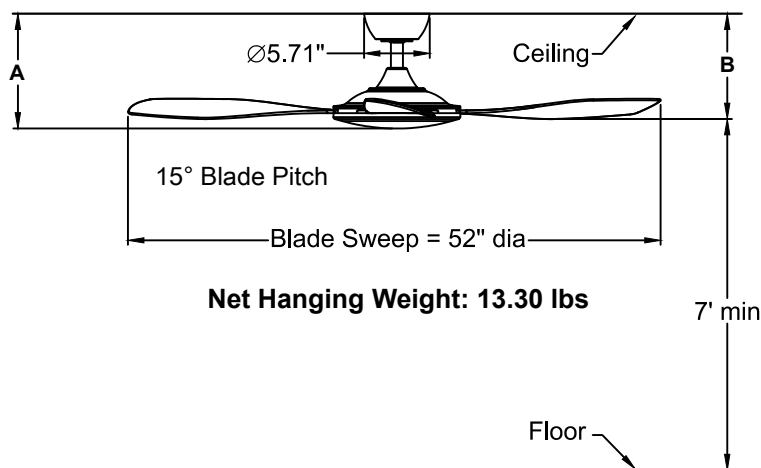

Net Hanging Weight: 13.30 lbs

Available Finishes	
BNBN	Brushed Nickel with Brushed Nickel
BNBL	Brushed Nickel with Black
BL	Black with Black

	A	B
Fan w/4.5" downrod	9.98"	9.15"
Fan w/12" downrod	17.48"	16.65"
Fan w/18" downrod	23.48"	22.65"
Fan w/24" downrod	29.48"	28.65"
Fan w/36" downrod	41.48"	40.65"
Fan w/48" downrod	53.48"	52.65"
Fan w/60" downrod	65.48"	64.65"
Fan w/72" downrod	77.48"	76.65"

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

158x15 sensorless DC motor is designed for optimal performance with this fan.

BLADES:

A set of three 22.5" plastic blades is included.

CONTROL OPTIONS:

TR205D hand-held remote control is included. Push button remote control with variable fan speeds, fresh air, reverse, infinite light levels, fan/light timer, home away, safe exit and off button. Optional TW206D wall control and WFR8520 receiver are available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

Not include.

DOWNROD OPTIONS:

Fan comes with 1" dia. x 4.5" long downrod (DR1-4.5). Optional downrods available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan must use 12" or longer downrod, and can be mounted on a sloped ceiling up to 19°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional close-to-ceiling kit is available as well—sold separately. Optional sloped ceiling kits (SCK1-52) are available for up to 42°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry and damp locations.

Energy Guide FTC Measured with BPW7913 Blades in 72" sweep			
Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
17	3746	5	218