
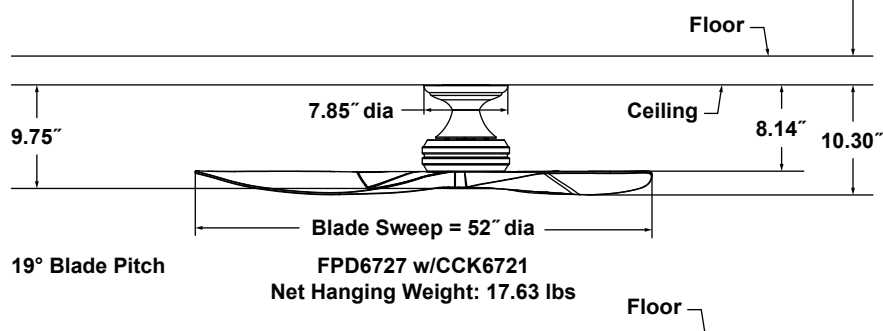
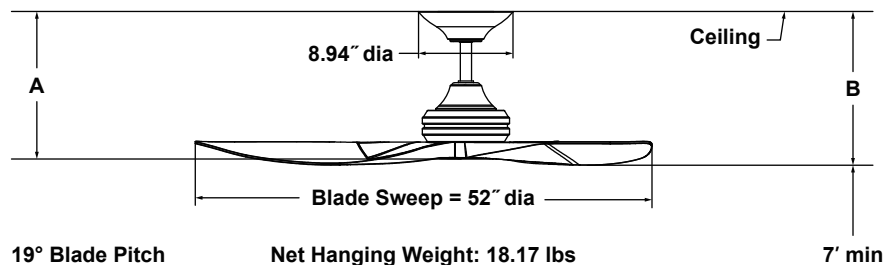


AVIARA™ COASTAL

FPD6727** 52" Ceiling Fan

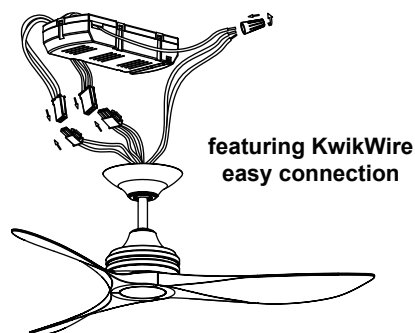

	A	B
Fan w/6" downrod	13.63"	14.30"
Fan w/12" downrod	19.63"	20.30"
Fan w/18" downrod	25.63"	26.30"
Fan w/24" downrod	31.63"	32.30"
Fan w/36" downrod	43.63"	44.30"
Fan w/48" downrod	55.63"	56.30"
Fan w/60" downrod	67.63"	68.30"
Fan w/72" downrod	79.63"	80.30"

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

DC153 x 15 sensorless DC motor is designed for optimal performance with this fan.

BLADE SET:

A set of three 25" composite blades is included.

CONTROL OPTIONS:

A WiFi receiver and TR360 hand-held remote control are included. Push button remote control with 6 fan speeds, fresh air, reverse, ON/OFF dimmer light levels, 5 CCT Select (correlated color temperature selection), fan/light timer, home away, safe exit and off button. Visit the Apple APP Store or Google Play Store to download the free fanSync WiFi APP and create your Fanimation fanSync account. Optional TW406 wall control is available — sold separately. Instructions is provided with each control.

LIGHTING OPTIONS:

LK6702 - One 24-watt 5 CCT LED (2700K/3000K/3500K/4000K/5000K).

DOWNROD OPTIONS:

Fan comes with a 1" dia. x 6" long downrod. Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 27°. Most sloped ceiling installations require a standard 18" downrod or longer downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Optional close-to-ceiling kit (CCK6721) is available as well — sold separately. Call technical support for more information.

LOCATION USE:

Fan is rated for dry, damp and wet locations. This fan is for room up to 400 sq ft.

Available Finishes 5-Year Finish Warranty

BLM	Black with Black Blades
BLMKM	Black with KOA Blades
BNMKM	Brushed Nickel with KOA Blades
BSNMN	Brushed Satin Brass with Natural Blades
MWM	Matte White with Matte White Blades

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High (6 th)	178	5842	179	0.45	33
Med (4 th)	138	4599	295	0.23	16
Low (1 th)	47	1526	547	0.06	3

Energy Guide FTC

Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
22	4038	6	183

Fan Velocity (FPM)

High Speed Velocity	Average Velocity
576	359