

The Akira™

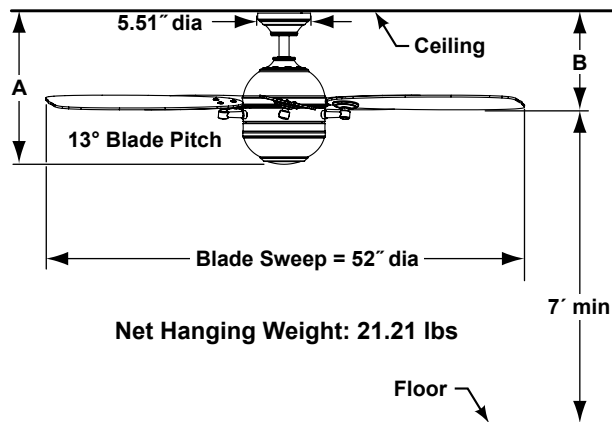
FP8000 Series



SPECIFICATION SHEET



Product Specifications Subject To Change

AKIRA™**FP8000**
Ceiling Fan**

	A	B
Fan w/6" downrod	17.00"	10.43"
Fan w/12" downrod	24.50"	17.93"
Fan w/18" downrod	30.50"	23.93"
Fan w/24" downrod	36.50"	29.93"
Fan w/36" downrod	48.50"	41.93"
Fan w/48" downrod	60.50"	53.93"
Fan w/60" downrod	72.50"	65.93"
Fan w/72" downrod	84.50"	77.93"

Available Finishes

OB	Oil-Rubbed Bronze with Opal Frosted Glass
PW	Pewter with Opal Frosted Glass

INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

172 x 20 motor is designed for optimal performance with this fan.

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	163	5231	84	0.51	62
Med	106	3417	118	0.42	29
Low	65	1997	154	0.30	13

BLADE SETS:

A set of 5 reversible wood blades is included. Mahogany/Walnut included with Oil-Rubbed Bronze fan and Cherry/Walnut included with Pewter fan.

CONTROL OPTIONS:

Hand-held remote control (C24) with canopy receiver (RECFP5220) is included. Push button remote control has buttons for 3 separate fan speeds, infinite light levels and off position. Reversing switch located on fan housing. Optional wall control (C25) is available (to be used in conjunction with fan receiver).

LIGHTING OPTIONS:

The 2-bulb (60 watt max candelabra bulbs - included) downlight fixture is included with this fan assembly. Maximum downlight wattage not to exceed 120 watts.

DOWNROD OPTIONS:

The Akira™ fan comes with a 1" Dia. x 4.5" downrod. Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer downrod, a downrod coupler is available. The Akira™ fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 4.5" downrod. Optional close-to-ceiling kit is available as well—sold separately. Call your local dealer for more information.

LOCATION USE:

Fan is rated for dry locations only.



celebrating 25 years

**10983 Bennett Parkway
Zionsville, IN 46077**

Toll Free (888) 567-2055

FAX (866) 482-5215

Outside U.S. call (317) 733-4113

Visit Our Website @ www.fanimation.com

*Copyright 2010 Fanimation, Inc.
All Rights Reserved*



2010/01