


The Islander[®]

FP320 Series




SPECIFICATION SHEET

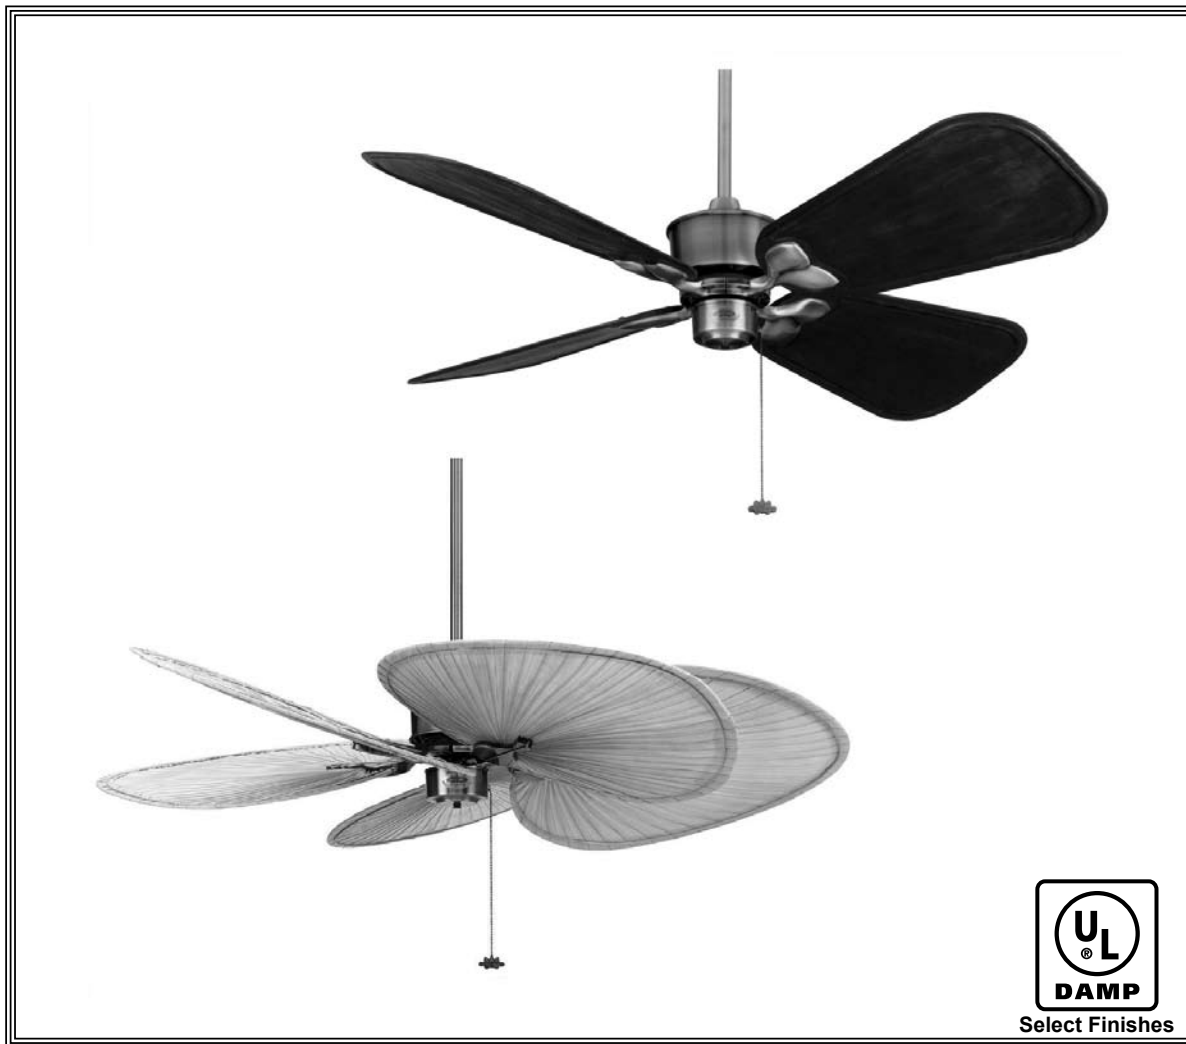

celebrating 25 years

Product Specifications subject to change

The Islander[®] Fan Assembly – FP320**

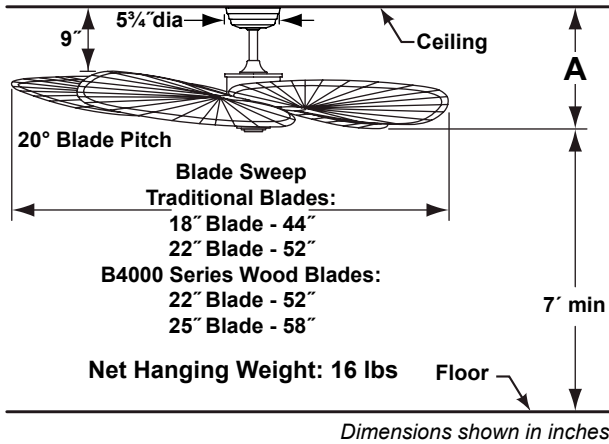

Available Finishes	
AB	Antique Brass
BL	Black (Damp)
MW	Matte White (Damp)
OB	Oil-Rub'd Brnz (Damp)
PW	Pewter
RS	Rust (Damp)
SN	Satin Nickel

Distance from Ceiling to Edge of Blade	A
Fan w/6" downrod	15"
Fan w/12" downrod	21"
Fan w/18" downrod	27"
Fan w/24" downrod	33"
Fan w/36" downrod	45"
Fan w/48" downrod	57"
Fan w/60" downrod	69"
Fan w/72" downrod	81"

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

FK2100 motor is designed for optimal performance with this fan. 220 VAC, 50 Hz export version available.

FAN SPEEDS:

Material, shape and size of fan blade will affect fan speed. In general, smaller blades will turn faster than larger ones and narrower blades will turn faster than the wider ones.

BLADES:

A variety of 4- and 5-blade sets are available. 5-blade sets are available in palm, bamboo, wood and composite materials. 4-blade sets are made of wood and require the use of BH20 series blade holders (not included). 4-blade sets will increase speed and airflow. See our catalog or visit www.fanimation.com for blade options.

CONTROL OPTIONS:

Optional C1 and C2 wall controls available—sold separately. Optional C20 remote control and C21 wall control available with use of optional SW50 switch cap receiver—all sold separately. Instructions are provided with each control. Optional C1-220 wall control is available for 220V models—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

Optional lighting fitters and light kits are available. See our catalog or visit www.fanimation.com for available lighting options.

DOWNROD OPTIONS:

Fan comes with a 1/2" dia. x 6" long downrod (DR6). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". The Islander[®] fan can be mounted on a sloped ceiling up to 30°. Optional sloped ceiling kits are available for up to 52°. Call technical support for more information.

LOCATION USE:

Fan is dry location rated only, except where (Damp) is noted next to above listed finish codes.

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	141	4788	58	0.69	82
Med	91	2944	77	0.47	38
Low	43	957	101	0.23	10



10983 Bennett Parkway
Zionsville, IN 46077
Toll Free (888) 567-2055
FAX (866) 482-5215

Outside U.S. call (317) 733-4113

Visit Our Website www.fanimation.com

