


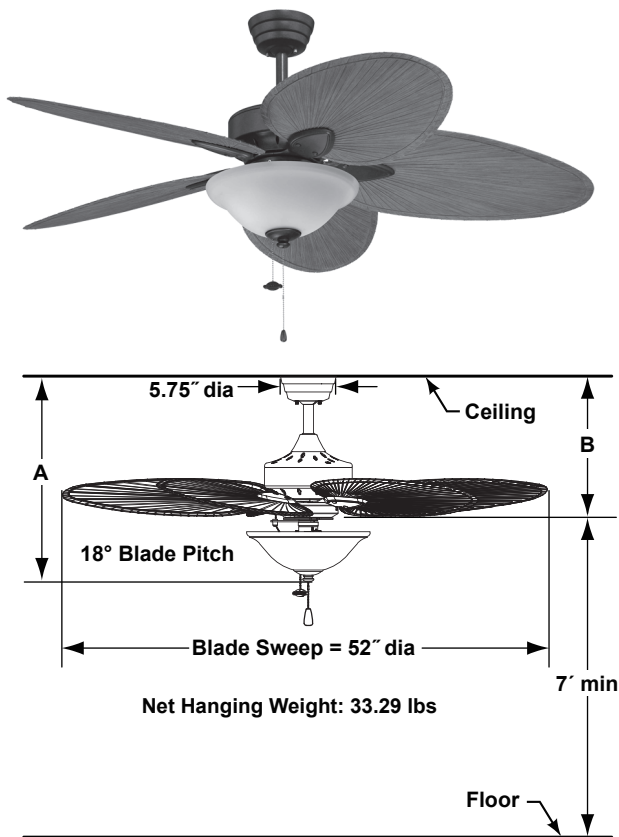

WINDPOINTE® SERIES

FP7500RSP4LK 52" Ceiling Fan

	A	B
Fan w/6" downrod	21.28"	14.52"
Fan w/12" downrod	27.28"	20.52"
Fan w/18" downrod	33.28"	26.52"
Fan w/24" downrod	39.28"	32.52"
Fan w/36" downrod	51.28"	44.52"
Fan w/48" downrod	63.28"	56.52"
Fan w/60" downrod	75.28"	68.52"
Fan w/72" downrod	87.28"	80.00"

Available Finishes

RS	Rust (Damp)
OB	Oil-rubbed Bronze (Damp)

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	127	4755	83	0.49	57
Med	85	2979	124	0.32	24
Low	52	1662	154	0.22	11

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

188 x 25 motor is designed for optimal performance with this fan.

BLADES:

A set of five 22" damp location composite blades is included.

LIGHTING OPTIONS:

Two 75-watt halogen minican bulbs included. See our catalog or visit www.fanimation.com for available lighting options.

DOWNROD OPTIONS:

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. Fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for up to 52°. Optional close-to-ceiling kit is available as well-sold separately. Call technical support for more information.

LOCATION USE:

Fan is rated for dry and damp locations.