

# *THE PALMETTO*<sup>®</sup>

FP600

## SPECIFICATION SHEET



### INSTALLATION REQUIREMENTS

Each drive shaft support requires backing consisting of 3/4" plywood (20" x 20") attached to the ceiling joists, snug above the sheet rock, and able to support 100 lbs.

### ELECTRICAL REQUIREMENTS

The drive shaft support that contains the motor will require 120 VAC via a flush mount j-box positioned on center and wired back to an on/off switch (Motor is single speed). Any support that contains a light fixture will also require a j-box on center with a circuit wired back to a dimmer circuit or on/off switch. The lights and motor should be on separate switch legs.

*Specifications subject to change*



10983 Bennett Parkway  
Zionsville, IN 46077  
(888) 567-2055  
FAX (866) 482-5215

Outside U.S. call (317) 733-4113  
Visit Our Website [www.fanimation.com](http://www.fanimation.com)

# The Palmetto<sup>®</sup>


# Fan Assembly

** Finishes Codes	
AB	Antique Brass
BL	Black
WH	White

DIMENSIONAL INFORMATION		
A	OVERALL LENGTH*	18'
B	SUPPORT SPACING†	9'
C	CEILING TO SHAFT	27"
D	BASE WIDTH	6"
E	BASE LENGTH	18"
F	BLADE SWEEP	48"
G	OVERALL DROP	51"
H	BLADE RADIUS	24"
I	BLADE LENGTH	18"
J	BASE STEM LENGTH	4"

\*Available 9' to 45' (depending on number of sections)  
 † Supports can be spaced from between 4' to 9'.  
 Shaft is cut to length at installation.

**NOTE:** Not designed for significant air movement.

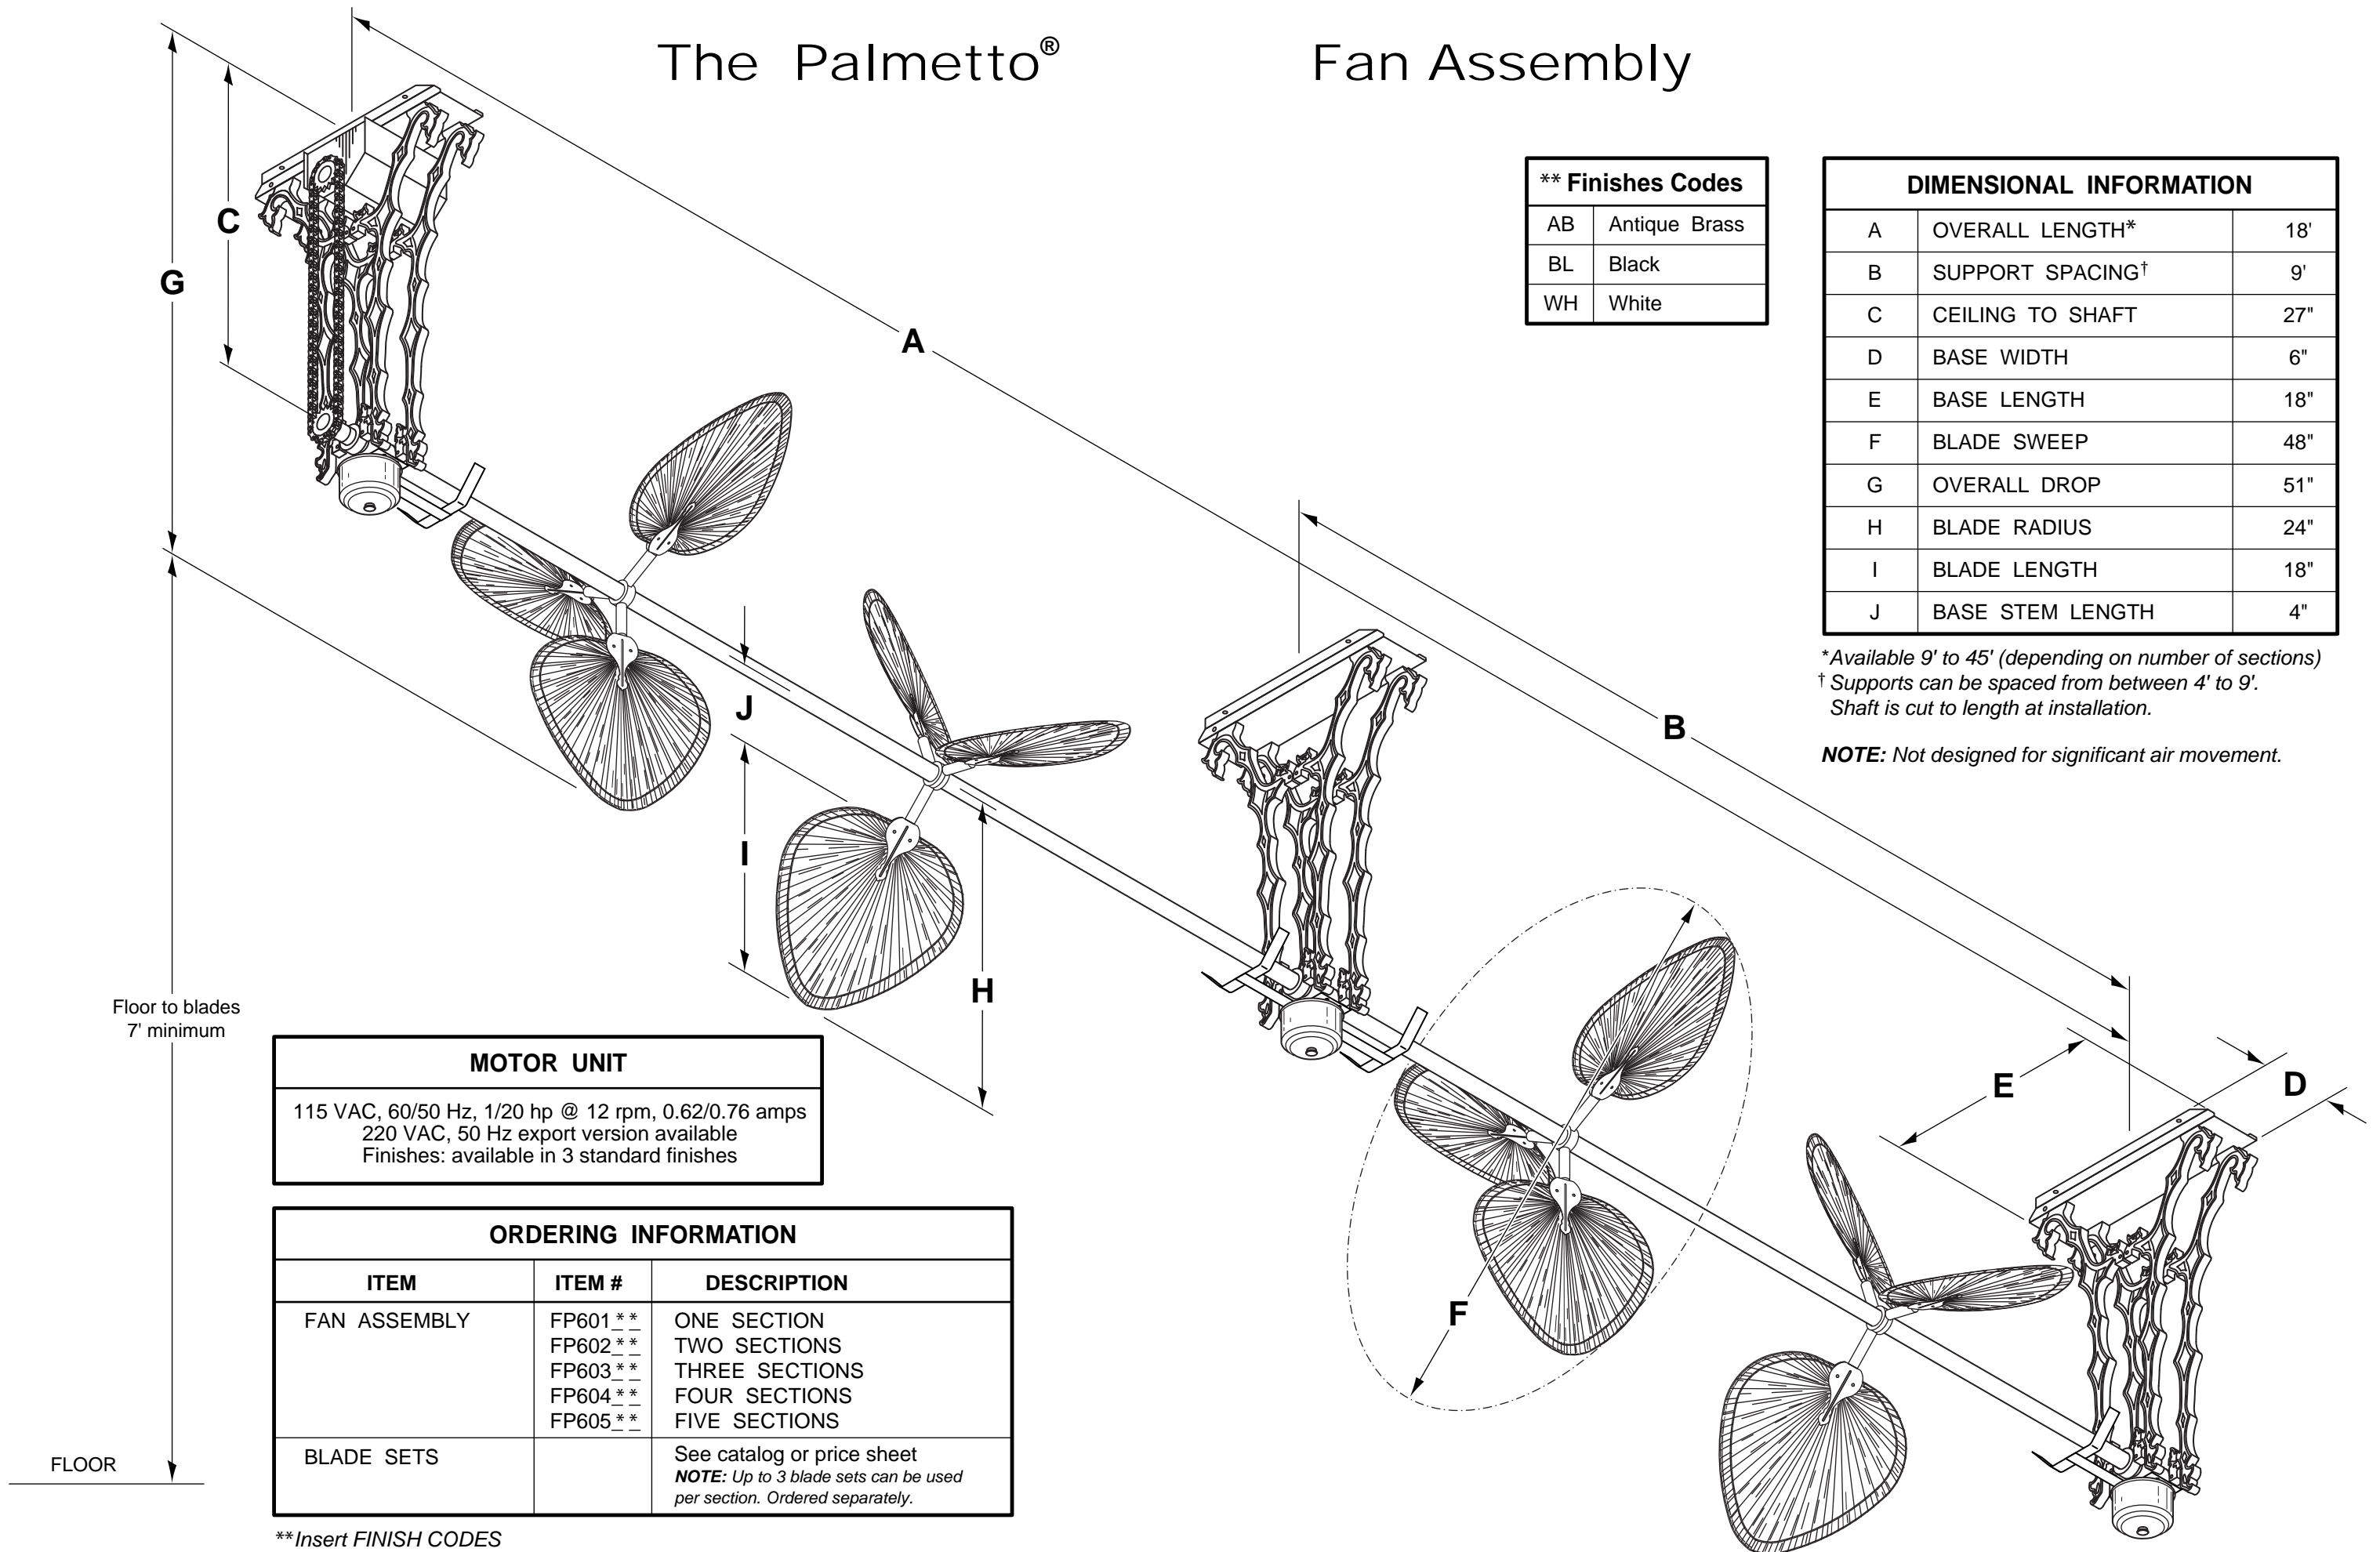

MOTOR UNIT
115 VAC, 60/50 Hz, 1/20 hp @ 12 rpm, 0.62/0.76 amps 220 VAC, 50 Hz export version available Finishes: available in 3 standard finishes

ORDERING INFORMATION		
ITEM	ITEM #	DESCRIPTION
FAN ASSEMBLY	FP601 **	ONE SECTION
	FP602 **	TWO SECTIONS
	FP603 **	THREE SECTIONS
	FP604 **	FOUR SECTIONS
	FP605 **	FIVE SECTIONS
BLADE SETS		See catalog or price sheet <b>NOTE:</b> Up to 3 blade sets can be used per section. Ordered separately.

\*\*Insert FINISH CODES