


**LANDAN™**

# FPD8087\*\* Ceiling Fan

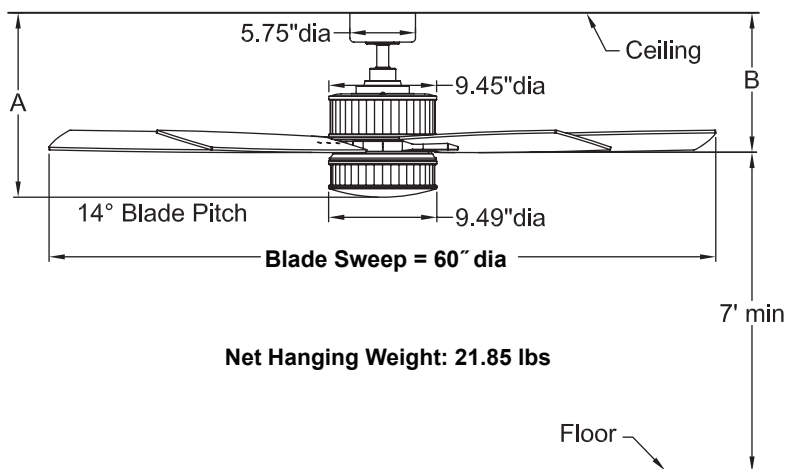

|                    | A      | B      |
|--------------------|--------|--------|
| Fan w/4.5" downrod | 16.16" | 12.22" |
| Fan w/12" downrod  | 23.66" | 19.72" |
| Fan w/18" downrod  | 29.66" | 25.72" |
| Fan w/24" downrod  | 35.66" | 31.72" |
| Fan w/36" downrod  | 47.66" | 43.72" |
| Fan w/48" downrod  | 59.66" | 55.72" |
| Fan w/60" downrod  | 71.66" | 67.72" |
| Fan w/72" downrod  | 83.66" | 79.72" |

### Available Finishes

| Fan / Housing Assembly |               | Blades - Traditional               |
|------------------------|---------------|------------------------------------|
| BA                     | Bronze Accent | Cherry / Walnut with Forsted Glass |
| SN                     | Satin nickel  | Cherry / Maple with Forsted Glass  |

### INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

### ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

### MOTOR SPECS:

DC-125S DC motor is designed for optimal performance with this fan.

### BLADES:

A set of five 24.63" reversible traditional wood blades is included.

### CONTROL OPTIONS:

TR31 hand-held DC fan remote control is included. Push button remote control has 6 fan speeds, reverse, off button and infinitely-varying uplight and downlight controls. Optional TW32 wall control is available—sold separately. Instructions are provided with each control.

### LIGHTING OPTIONS:

Uplight with eight 10-watt LED bulbs and downlight with twelve 15-watt LED bulbs are included. See our catalog or visit [www.fanimation.com](http://www.fanimation.com) for available lighting options.

### DOWNROD OPTIONS:

Fan comes with 1" dia. x 4.5" long downrod. Optional downrods available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 30° and up to 52°. Call technical support for more information.

### LOCATION USE:

Fan is rated for dry locations only.

| Airflow / Energy Efficiency Info (120V) |         |      |             |      |       |
|---|---------|------|-------------|------|-------|
| Fan Speed                               | Max RPM | CFM  | CFM / Watts | Amps | Watts |
| I                                       | 51      | 2635 | 659         | 0.09 | 4.0   |
| II                                      | 63      | 3424 | 535         | 0.13 | 6.4   |
| III                                     | 76      | 4141 | 441         | 0.18 | 9.4   |
| IV                                      | 89      | 4769 | 341         | 0.25 | 14.0  |
| V                                       | 101     | 5404 | 279         | 0.32 | 19.4  |
| VI                                      | 119     | 6134 | 208         | 0.46 | 29.5  |