




BP200**1 Series Ceiling Fans

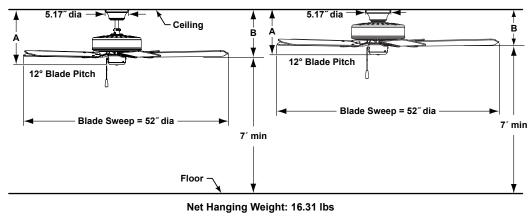

	Α	В
Fan In Close to Ceiling Configuration	9.63″	7.74″
	_	

	Α	В	
Fan w/4.5" downro	13.20″	11.10″	
Fan w/12" downrod	20.70″	18.60″	
Fan w/18" downrod	26.70"	24.60"	
Fan w/24" downrod	32.70″	30.60″	
Fan w/36" downrod	44.70″	42.60″	
Fan w/48" downrod	56.70″	54.60″	
Fan w/60" downrod	68.70″	66.60″	
Fan w/72" downrod	80.70″	78.60″	

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

153 x 15 motor is designed for optimal performance with this fan.

BLADES:

A set of five 20.7" traditional wood blades is included.

CONTROL OPTIONS:

Optional CW1, CW1SW, CW2, CW5 and CWRL4 wall controls and CRL4WH and CRL8TS remote controls (with receiver units) are available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

Optional lighting fitters and light kits are available. See our catalog or visit www.fanimation.com for available lighting options.

DOWNROD OPTIONS:

Dual mount for flush mount application or 1" dia x 4.5" long downrod. Optional downrods available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 19°. Optional sloped ceiling kits (SCK1-52) are available for slope an angles up to 52°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Call technical support for more information.

LOCATION USE:

Series fans are rated for dry locations only.

Fan / Housing Assembly	biades - Traditional			
MW - Matte white	Matte white			
OB – Oil-rubbed bronze	Cherry / walnut reversible			
SN – Satin nickel	ckel Cherry / walnut reversible			
Airflow / Energy Efficiency Info (120V)				

Available Finishes

Ean / Housing Assembly Blades

Airflow / Energy Efficiency Info (120V)							
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts		
High	163	4935	88	0.44	56		
Med	104	3246	141	0.28	23		
Low	56	1534	170	0.16	9		